
beamZ Pro
BEAMZ
MADE
EAZY
CATALOGUE
2026

INDEX

MOVING HEADS	2 - 20
UPLIGHTS	21 - 27
WALL WASHERS	28 - 37
BLINDERS AND PANELS	38 - 41
LED TUBES	42
LED BARS	43 - 45
LED PARS	46 - 58
MAST LIGHTS	59
PROFILE SPOTS	60 - 61
FRESNELS	62 - 67
STROBOSCOPES	68 - 71
PRO LASERS	72 - 73
DMX INTERFACES	74 - 75
ATMOSPHERICS	76 - 80
TRUSS	81 - 99
TOWER SYSTEMS	100
TRUSS ACCESSORIES	101 - 104
CLAMPS	105 - 108
LIGHT STANDS	109 - 110



TIGER 17R

2x BEAM/SPOT MOVING HEADS IN FLIGHTCASE

- 2-in-1: Beam and Spot
- 350W 17R high intensity discharge bulb included
- Gobo wheel: 14 static gobos + 9 rotating replaceable glass gobos + open
- Colour wheel: 13 colours + open
- Gobo shake effect
- Frost effect filter
- Prisms: rotatable 6 facet prism + rotatable 8 facet prism
- Motorized focus
- Mechanical shutter and adjustable speed strobe effect (1-13 x per sec)
- Dimmer: 0 – 100% linear dimmer
- DMX, Auto mode and Master/Slave function
- Automatic pan/tilt correction
- With pan/tilt lock mechanism
- Pan/Tilt resolution: 16bit
- Battery function (mains power not required for fixture setup)
- Powerconnector input/output
- Quick lock omega clamp included (2x)
- DMX cable and Powerconnector cable included

MSD350

17R BULB

- ARC size: 1,3mm
- Lumen output: 15.000 lm
- Colour temperature: 7.800K
- Average lamp life > 1.500 hours
- Burning position: Any



150.408 CARTON **10**

150.398 CARTON **1** PALLET **4**

Colour temperature	8000K
Light source	MSD 17R 350W bulb
Colour wheel	13 colours + open
Dispersion: Beam	5°
Dispersion: Spot	17°
Dispersion: Wash	17° - 43°
Zoom	Yes
Illuminance	145.000lx@10m
Head movement: Pan	540°
Head movement: Tilt	270°
Static gobo: Quantity	14
Rotating gobos: Quantity	9
Gobo shake	Yes
Interchangeable gobos	Yes
Gobo dimensions	15.8mm
Prisma 1	6 Facet
Prisma 2	8 Facet
Frost filter	Yes
Flash rate per second	1 - 13Hz
Modes	Automatic programs, DMX, Manual, Master/Slave
Sound to light mode	Yes
DMX channels	16, 20
DMX connection	3-pin XLR
Display	LCD
IP rating	IP20
Cooling	Temperature controlled fan
Power plug	Power-connector
Power consumption	3.2 - 1.8A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	420 x 300 x 635mm
Weight	60,00kg
Weight: Each	20,60kg



TIGER 9R
COMPACT BEAM MOVING HEAD

- 260W 9R high intensity discharge bulb
- 14 gobos + open beam
- 14 colours + open
- Gobo shake effect
- Frost effect lens
- Rotatable 7 facet prism
- Rotatable 48 facet prism
- Motorized focus
- Mechanical shutter and adjustable speed strobe effect
- Mechanical dimmer
- DMX and Stand-alone mode
- Automatic pan/tilt correction
- Control panel with LCD display
- DMX in/output via 3/5-pin XLR
- P-Con input/output (cable included)
- Quick lock omega clamp included

AVAILABLE OPTIONS		CARTON	PALLET
152.020	MOVING HEAD	**1**	**16**
152.022	2 PIECES IN FLIGHTCASE	**1**	**4**
152.024	FLIGHTCASE FOR 2 PIECES	**1**	**4**

Light source	MSD 9R 260W bulb
Colour wheel	14 colours + open
Beam angle	1°
Illuminance	208.973 lx @ 7m
Head movement: Pan	540°
Head movement: Tilt	180°
Static gobo: Quantity	14
Gobo shake	Yes
Prisma 1	8 Facet
Prisma 2	48 Facet
Frost filter	Yes
Flash rate per second	0 - 10Hz
Modes	Automatic programs, DMX, Manual, Master/Slave
Sound to light mode	Yes
DMX channels	16, 20
DMX connection	3-pin XLR, 5-pin XLR
Display	LCD
IP rating	IP20
Cooling	Temperature controlled fan
Power plug	P-Con
Power consumption	3.150 - 1.628A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	310 x 250 x 510mm
Weight	12,35kg





TIGER 7RC
COMPACT BEAM MOVING HEAD

- 230W 7R high intensity discharge bulb
- 15 gobos + open beam
- 13 colours + open
- Gobo shake effect
- Frost effect lens
- Rotatable 7 facet prism
- Motorized focus
- Mechanical shutter and adjustable speed strobe effect
- Mechanical dimmer
- DMX and Stand-alone mode
- Automatic pan/tilt correction
- Reset function
- Control panel with LCD display
- DMX in/output via 3/5-pin XLR
- P-Con input/output (cable included)
- Quick lock omega clamp included (2x)

AVAILABLE OPTIONS		CARTON	PALLET
152.026	MOVING HEAD	**1**	**16**
152.027	2 PIECES IN FLIGHTCASE	**1**	**4**
152.028	FLIGHTCASE FOR 2 PIECES	**1**	**4**

Light source	MSD 7R 230W bulb
Colour wheel	13 colours + open
Beam angle	1°
Illuminance	197.226 lx @ 5m
Head movement: Pan	540°
Head movement: Tilt	180°
Static gobo: Quantity	15
Gobo shake	Yes
Prisma 1	7 Facet
Frost filter	Yes
Flash rate per second	1 - 10Hz
Modes	Automatic programs, DMX, Manual, Master/Slave
Sound to light mode	Yes
DMX channels	16, 20
DMX connection	3-pin XLR, 5-pin XLR
Display	LCD
IP rating	IP20
Cooling	Temperature controlled fan
Power plug	P-Con
Power consumption	2.390 - 1.176A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	280 x 240 x 470mm
Weight	10,15kg





MSD380
18R BULB

- ARC size: 1,2mm
- Lumen output: 20.000 lm
- Colour temperature: 7.500K
- Average lamp life > 1.500 hours

150.406 CARTON **10**



IP65

NEREID380B
OUTDOOR BEAM MOVING HEAD

- Moving head Beam with LED ring indoor/outdoor use
- 380W high intensity discharge bulb included
- Aura effect ring: 40x RGB SMD LEDs
- Gobo wheel: 12 static gobos + 5 glass gobos + open
- Gobo functions: gobo shake + bi-directional flow effect
- Colour wheel: 14 colours + open
- Colour wheel functions: split colours + bi-directional flow effect
- Rainbow effect wheel and frost filter
- Rotatable 8 and 16 facet prisms (can be overlapped) with adjustable rotating speed and direction
- Motorized focus
- 0-100% electronic dimmer
- Automatic pan/tilt correction
- DMX, master/slave and stand-alone mode
- RDM remote control, bidirectional data transmission
- DMX in/output via weatherproof 3-pin XLR
- P-Con TR1 in/output
- Quick lock clamps included

AVAILABLE OPTIONS		CARTON	PALLET
152.040	MOVING HEAD	**1**	**16**
152.041	2 PIECES IN FLIGHTCASE	**1**	**8**
152.043	FLIGHTCASE FOR 2 PIECES	**1**	**8**

Colour temperature	8000K
Light source	MSD 18R 380W bulb
Colour wheel	14 colours + open
Beam angle	1°
Motorized focus	Yes
Illuminance	209.000 lx @ 7m
Head movement: Pan	540°
Head movement: Tilt	270°
Static gobo: Quantity	12 + 5 glass + open
Gobo shake	Yes
Prisma 1 / Prisma 2	8 Facet / 16 Facet
Rainbow effect wheel	Yes
Frost filter	Yes
Aura effect ring	40x RGB SMD LEDs
Flash rate per second	1 - 10Hz
Modes	Auto programs, DMX, Master/Slave
RDM	Yes
DMX channels	19
DMX connection	3-pin XLR
Display	LCD
IP rating	IP65
Cooling	Fan
Power plug	P-Con TR1
Power consumption	3.53 - 1.65A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	390 x 300 x 600mm
Weight	22,10kg





IP65

NEREID500

OUTDOOR HYBRID LED MOVING HEAD WITH ZOOM

- Hybrid moving head Beam for indoor/outdoor use
- Beam/Spot/Wash combination
- 500W high intensity LED
- Static gobo wheel: 12 static gobos + open
- Rotating gobo wheel: 7 rotating gobos + open
- Colour wheel: 13 colours + open
- Frost effect wheel
- 1x linear and 1x circle prism
- Motorized zoom
- IP65 outdoor-rated classification
- DMX, master/slave and auto mode
- 0-100% electronic dimmer
- 16bit control: Dimmer, colour, focus, zoom, pan/tilt, gobo indexing and rotation
- RDM control
- DMX in/output via 3-pin and 5-pin XLR
- Control panel with LCD display
- P-Con Powerconnector TR1 in/output
- Quick lock omega clamps included

AVAILABLE OPTIONS		CARTON	PALLET
152.065	MOVING HEAD	**1**	**2**
152.068	2 PIECES IN FLIGHTCASE	**1**	**2**
152.069	FLIGHTCASE FOR 2 PIECES	**1**	**2**

Light source	Single colour LED
Colours	White
LED power	542W
Colour wheel	12 colours + open
CMY wheel	Yes
Beam angle: Min / Max	2° / 44°
Zoom	Yes
Illuminance	168.972 lx @ 5m
Head movement: Pan / Tilt	540° / 270°
Static gobo: Quantity	12
Rotating gobos: Quantity	7
Gobo shake	Yes
Prisma 1	4 Facet Circle/Linear
Frost filter	Yes
Flash rate per second	1 - 34Hz
Modes	Automatic programs, DMX, Master/Slave
RDM	Yes
DMX channels	29
DMX connection	3-pin XLR, 5-pin XLR
Display	LCD
IP rating	IP65
Cooling	Temperature controlled fan
Power plug	P-Con TR1
Power consumption	5.64 - 2.64A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	390 x 310 x 708mm
Weight	34,25kg



IP65

NEREID1940

OUTDOOR WASH LED MOVING HEAD WITH ZOOM

- LED moving head for indoor/outdoor use
- Rotating Bee Eye lenses for wide-ranging beam and wash effects
- 19x 40W 4-in-1 RGBW LEDs
- Single pixel control
- High-efficiency motorized zoom optical system (ratio 1:6.7)
- Pre-programmed macro effects with variable speed
- Master/slave synchronization
- Sound activated with adjustable sensitivity
- Dimmer: 16-bit
- Control panel with LCD display
- DMX in/output via 3/5-pin XLR
- P-Con input/output
- Quick lock omega clamp included
- DMX cable included
- Powerconnector cable included

AVAILABLE OPTIONS		CARTON	PALLET
152.060	MOVING HEAD	**1**	**16**
152.058	2 PIECES IN FLIGHTCASE	**1**	**4**
152.062	FLIGHTCASE FOR 2 PIECES	**1**	**4**

Colour temperature	2000K - 8000K
Light source	4-in-1 LED
LED colours	Red, Green, Blue, White
LED power	40W
Quantity of LEDs	19
Beam angle: Min	6°
Beam angle: Max	40°
Zoom	Yes
Illuminance	100.101 lx @ 1m
Head movement: Pan	540°
Head movement: Tilt	180°
Flash rate per second	1 - 22Hz
Modes	Automatic programs, DMX, Master/Slave
Sound to light mode	Yes
RDM	Yes
DMX channels	17, 21, 86
DMX connection	3-pin XLR, 5-pin XLR
Display	LCD
IP rating	IP65
Cooling	Temperature controlled fan
Power plug	Power-connector TR
Power consumption	8.00 - 3.67A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	408 x 302 x 490 mm
Weight	22,15kg





IP65

NEREID760

OUTDOOR BEAM/WASH LED MOVING HEAD WITH ZOOM

- LED moving head for indoor/outdoor use
- Rotating Bee Eye lenses for wide-ranging beam and wash effects
- 7x 60W 4-in-1 RGBW LEDs
- Single pixel control
- High-efficiency motorized zoom optical system (ratio 1:6.7)
- Pre-programmed macro effects with variable speed
- Master/slave synchronization
- Dimmer: 16-bit
- Control panel with LCD display
- DMX in/output via 3/5-pin XLR
- P-Con input/output
- Quick lock omega clamps included
- DMX cables included
- Powerconnector cables included

AVAILABLE OPTIONS		CARTON	PALLET
152.080	MOVING HEAD	**1**	**6**
152.083	2 PIECES IN FLIGHTCASE	**1**	**3**
152.084	FLIGHTCASE FOR 2 PIECES	**1**	**3**

Colour temperature	2000K - 8000K
Light source	4-in-1 LED
Colours	Red, Green, Blue, White
LED power	60W
Quantity of LEDs	7
Beam angle: Min	7°
Beam angle: Max	46°
Zoom	Yes
Illuminance	136.770 lx @ 1m
Head movement: Pan	540°
Head movement: Tilt	180°
Flash rate per second	1 - 22Hz
Modes	Automatic programs, DMX, Master/Slave
RDM	Yes
DMX channels	23, 35, 55
DMX connection	3-pin XLR, 5-pin XLR
Display	LCD
IP rating	IP65
Cooling	Temperature controlled fan
Power plug	P-Con TRI
Power consumption	4.71 - 2.23A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	344 x 227 x 490mm
Weight	15,55kg





IP65

NEREID120W
OUTDOOR BEAM LED MOVING HEAD

- Moving head Beam for indoor/outdoor use
- 120W high intensity LED
- Gobo wheel: 17 static gobos + open
- Gobo functions: gobo shake + bi-directional flow effect
- Colour wheel: 13 colours + open with rainbow effect
- Rainbow effect wheel
- Rotatable 8 + 16 facet prism with adjustable rotating speed and direction
- Motorized focus
- DMX, Sound activation, master/slave and stand-alone mode
- 0-100% electronic dimmer
- Automatic pan/tilt correction
- RDM remote control, bidirectional data transmission
- DMX in/output via 3-pin and 5-pin XLR
- Powerconnector TRI in/output
- Quick lock omega clamps included
- DMX and power cable included

AVAILABLE OPTIONS		CARTON	PALLET
152.052	MOVING HEAD	**1**	**20**
152.050	2 PIECES IN FLIGHTCASE	**1**	**6**
152.054	FLIGHTCASE FOR 2 PIECES	**1**	**6**

Light source	Single colour LED
LED colours	White
LED power	120W
Quantity of LEDs	1
Colour wheel	13 colours + open
Beam angle	1.6°
Illuminance	205.295 lx @ 1m
Head movement: Pan	540°
Head movement: Tilt	270°
Static gobo: Quantity	17 + open
Gobo shake	Yes
Prisma 1	8 + 16 Facet
Rainbow effect wheel	Yes
Flash rate per second	0 - 25Hz
Modes	Automatic programs, DMX, Master/Slave
Sound to light mode	Yes
RDM	Yes
DMX channels	14
DMX connection	3-pin XLR, 5-pin XLR
Display	OLED
IP rating	IP65
Cooling	Temperature controlled fan
Power plug	Power-connector TR
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	210 x 310 x 475mm
Weight	11,30kg





IGNITE400

BEAM/SPOT/WASH LED MOVING HEAD WITH CMY

- 3-in-1: Beam, Spot and Wash moving head with CMY
- 400W high intensity white LED
- Gobo wheel 1: 10 static gobos
- Gobo wheel 2: 8 replaceable glass gobos
- Colour wheel: 8 colours + white
- CTO and CMY colour system
- Motorized linear zoom
- Frost effect filter
- Prisms: rotatable 3 facet prism + rotatable 4 facet prism
- Linear motorized focus
- Dimmer: 0 – 100% linear dimmer
- DMX, Auto mode and Master/Slave function
- Pan: 540° and Tilt: 270° Movement
- With pan/tilt lock mechanism
- Pan/Tilt resolution: 16bit
- Control panel with touch screen LCD display
- DMX in/output via 3-pin or 5-pin XLR
- Powerconnector input/output
- Quick lock omega clamp included
- Powerconnector cable included

AVAILABLE OPTIONS		CARTON	PALLET
152.092	MOVING HEAD	**1**	**8**
152.090	2 PIECES IN FLIGHTCASE	**1**	**4**
152.094	FLIGHTCASE FOR 2 PIECES	**1**	**4**

Colour temperature	6700K
Light source	Single colour LED
LED colours	White
LED power	400W
Colour wheel	8 colours + open
CMY Wheel	Yes
Beam angle: Min / Max	2° / 38°
Zoom	Yes
Illuminance	209.026 lx @ 1m
Head movement: Pan / Tilt	540° / 270°
Static gobo: Quantity	10
Rotating gobos: Quantity	8
Interchangeable gobos	Yes
Prisma 1	3 Facet
Prisma 2	4 Facet
Frost filter	Yes
Flash rate per second	0 - 30Hz
Modes	Automatic programs, DMX, Master/Slave
Sound to light mode	Yes
RDM	Yes
DMX channels	25
DMX connection	3-pin XLR, 5-pin XLR
Display	LCD
IP rating	IP20
Cooling	Temperature controlled fan
Power plug	Power-connector
Power consumption	4.13 - 1.95A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	660 x 360 x 370mm
Weight	20,60kg



IGNITE300A

BEAM/SPOT/WASH LED ANIMATION MOVING HEAD

- Beam, spot and wash light in one device
- 300W high intensity LED
- Gobo wheel 1: 3x glass and 4x metal gobos + open (interchangeable)
- Gobo wheel 2: 9x fixed gobos + open (split colours)
- Gobo functions: gobo shake, gobo rotation and rainbow effect
- Rotatable 3 and 8 facet prisms (can be overlapped) with adjustable rotating speed and direction
- Animation wheel (adjustable rotating speed and direction)
- Rainbow effect wheel and frost filter
- Motorized linear zoom
- DMX, Sound activation, master/slave and stand-alone mode
- 0-100% electronic dimmer
- Automatic pan/tilt correction
- RDM remote control, bidirectional data transmission
- DMX in/output via 3-pin and 5-pin XLR
- Powerconnector in/output
- Quick lock omega clamp included
- DMX and cable power cable included

AVAILABLE OPTIONS		CARTON	PALLET
152.106	MOVING HEAD	**1**	**8**
152.105	2 PIECES IN FLIGHTCASE	**1**	**4**
152.114	FLIGHTCASE FOR 2 PIECES	**1**	**4**

Light source	Single colour LED
LED colours	White
LED power	300W
Colour wheel	8 colours + open
Beam angle: Min	7°
Beam angle: Max	32°
Zoom	Yes
Illuminance	197.822 lx @ 1m
Head movement: Pan	540°/270°/180°
Head movement: Tilt	270°/180°/90°
Static gobo: Quantity	9 fixed
Rotating gobos: Quantity	3 glass and 4 metal
Gobo shake	Yes
Interchangeable gobos	Yes
Gobo dimensions	26mm
Prisma 1	3 Facet
Prisma 2	8 Facet
Frost filter	Yes
Flash rate per second	0 - 20Hz
Modes	Automatic programs, DMX, Manual, Master/Slave
Sound to light mode	Yes
RDM	Yes
DMX channels	16, 20
DMX connection	3-pin XLR, 5-pin XLR
Display	LCD
IP rating	IP20
Cooling	Temperature controlled fan
Power plug	Power-connector
Power consumption	2.83 - 1.32A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	365 x 225 x 530mm
Weight	15,60kg





IGNITE300
BEAM/SPOT/WASH LED MOVING HEAD

- Beam, spot and wash light in one device
- 300W high intensity LED
- Gobo wheel 1: 3x glass and 4x metal gobos + open (interchangeable)
- Gobo wheel 2: 9x fixed gobos + open (split colours)
- Gobo functions: gobo shake, gobo rotation and rainbow effect
- Rotatable 3 and 8 facet prisms (can be overlapped) with adjustable rotating speed and direction
- Frost filter
- Motorized linear zoom
- DMX, Sound activation, master/slave and stand-alone mode
- 0-100% electronic dimmer
- Automatic pan/tilt correction
- RDM remote control, bidirectional data transmission
- DMX in/output via 3-pin and 5-pin XLR
- Powerconnector in/output
- Quick lock omega clamp included
- DMX and cable power cable included

AVAILABLE OPTIONS		CARTON	PALLET
152.112	MOVING HEAD	**1**	**8**
152.110	2 PIECES IN FLIGHTCASE	**1**	**4**
152.114	FLIGHTCASE FOR 2 PIECES	**1**	**4**

Light source	Single colour LED
LED colours	White
LED power	300W
Colour wheel	8 colours + open
Beam angle: Min	7°
Beam angle: Max	32°
Zoom	Yes
Illuminance	197.822 lx @ 1m
Head movement: Pan	540°/270°/180°
Head movement: Tilt	270°/180°/90°
Static gobo: Quantity	9 fixed
Rotating gobos: Quantity	3 glass and 4 metal
Gobo shake	Yes
Interchangeable gobos	Yes
Gobo dimensions	26mm
Prisma 1	3 Facet
Prisma 2	8 Facet
Frost filter	Yes
Flash rate per second	0 - 20Hz
Modes	Automatic programs, DMX, Manual, Master/Slave
Sound to light mode	Yes
RDM	Yes
DMX channels	20
DMX connection	3-pin XLR, 5-pin XLR
Display	LCD
IP rating	IP20
Cooling	Temperature controlled fan
Power plug	Power-connector
Power consumption	3.73 - 1.74A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	365 x 225 x 530mm
Weight	15,60kg



IGNITE220

SPOT LED MOVING HEAD WITH ZOOM

- 220W high intensity white LED
- Linear motorized zoom
- Static gobo wheel: 7x gobos + open
- Rotating gobo wheel: 6x gobos + open (interchangeable)
- Colour wheel: 7 colours + open
- Rotatable 3 facet prism
- 0-100% electronic dimmer
- Motorized focus
- 21, 23 or 31 DMX channels
- DMX and Stand-alone mode
- Master/slave synchronization
- Sound activated mode (9 programs)
- Auto mode (9 programs)
- Invertible pan/tilt
- Control panel with LCD display
- DMX in/output via 3-pin XLR
- Powerconnector input/output
- Quick lock omega clamp included
- Powerconnector cable and safety cord included

AVAILABLE OPTIONS		CARTON	PALLET
152.087	MOVING HEAD	**1**	**24**
152.085	2 PIECES IN FLIGHTCASE	**1**	**8**
152.088	FLIGHTCASE FOR 2 PIECES	**1**	**8**

Light source	Single colour LED
LED colours	White
LED power	220W
Quantity of LEDs	1
Colour wheel	7 colours + open
Beam angle: Min	12°
Beam angle: Max	24°
Zoom	Yes
Illuminance	1301.115 lx @ 1m
Head movement: Pan	540°
Head movement: Tilt	270°
Static gobo: Quantity	7
Rotating gobos: Quantity	6
Interchangeable gobos	Yes
Prisma 1	3 Facet
Flash rate per second	1 - 25Hz
Modes	Automatic programs, DMX, Master/Slave
Sound to light mode	Yes
DMX channels	21, 23, 31
DMX connection	3-pin XLR
Display	LCD
IP rating	IP20
Cooling	Temperature controlled fan
Power plug	Power-connector
Power consumption	2.4 - 1.119A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	305 x 225 x 420mm
Weight	10,30kg



IGNITE180S
SPOT LED MOVING HEAD

- 180W high intensity LED
- 13 or 17 DMX channels
- DMX and Stand-alone mode
- Master/slave synchronization
- Sound activated with adjustable sensitivity
- Auto mode
- Beam angle 15°
- Gobo wheel 1: 3x glass and 3x metal gobos + open (interchangeable)
- Gobo wheel 2: 8x metal gobos + open
- Gobo functions: gobo shake and gobo rotation
- 7 colours + open
- Split colour, rainbow effect
- Rotatable 3 facet prism
- Rotatable 6 facet prism - linear
- Motorized focus
- 0-100% electronic dimmer
- Strobe: 0-20Hz
- Automatic pan/tilt correction
- Reset function
- Control panel with full-colour LCD display
- DMX in/output via 3-pin XLR
- Powerconnector input/output
- Quick lock omega clamp included (2x)
- DMX and Powerconnector cable included

AVAILABLE OPTIONS		CARTON	PALLET
150.371	MOVING HEAD	**2**	**24**
150.370	2 PIECES IN FLIGHTCASE	**1**	**11**
150.375	FLIGHTCASE FOR 2 PIECES	**1**	**11**

Light source	Single colour LED
LED colours	White
LED power	180W
Quantity of LEDs	1
Colour wheel	7 colours + open
Dispersion	15°
Illuminance	131.000lx@1m
Head movement: Pan	540°
Head movement: Tilt	270°
Static gobo: Quantity	15
Rotating gobos: Quantity	6
Gobo shake	Yes
Interchangeable gobos	Yes
Gobo dimensions	21mm
Prisma 1	3 Facet
Prisma 2	6 Facet
Flash rate per second	0 - 20Hz
Modes	Automatic programs, DMX, Manual
Sound to light mode	Yes
DMX channels	13, 17
DMX connection	3-pin XLR
Display	LCD
IP rating	IP20
Cooling	Temperature controlled fan
Power plug	Power-connector
Power consumption	2 - 0.98A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	320 x 220 x 360mm
Weight	10,20kg



IGNITE180B
BEAM LED MOVING HEAD

- 180W high intensity LED
- 13 or 17 DMX channels
- DMX and Stand-alone mode
- Master/slave synchronization
- Sound activated with adjustable sensitivity
- Auto mode
- Beam angle 8°
- Gobo wheel 1: 3x glass and 3x metal gobos + open (interchangeable)
- Gobo wheel 2: 8x metal gobos + open
- Gobo functions: gobo shake and gobo rotation
- 7 colours + open
- Split colour, rainbow effect
- Rotatable 8 facet prism
- Rotatable 16 facet prism
- Motorized focus
- 0-100% electronic dimmer
- Strobe: 0-20Hz
- Automatic pan/tilt correction
- Reset function
- Control panel with full-colour LCD display
- DMX in/output via 3-pin XLR
- Powerconnector input/output
- Quick lock omega clamp included (2x)
- DMX and Powerconnector cable included

AVAILABLE OPTIONS		CARTON	PALLET
150.374	MOVING HEAD	**2**	**24**
150.373	2 PIECES IN FLIGHTCASE	**1**	**11**
150.375	FLIGHTCASE FOR 2 PIECES	**1**	**11**

Light source	Single colour LED
LED colours	White
LED power	180W
Quantity of LEDs	1
Colour wheel	7 colours + open
Dispersion	8°
Illuminance	208.000lx@1m
Head movement: Pan	540°
Head movement: Tilt	270°
Static gobo: Quantity	15
Rotating gobos: Quantity	6
Gobo shake	Yes
Interchangeable gobos	Yes
Gobo dimensions	21mm
Prisma 1	8 Facet
Prisma 2	16 Facet
Flash rate per second	0 - 20Hz
Modes	Automatic programs, DMX, Manual
Sound to light mode	Yes
DMX channels	13, 17
DMX connection	3-pin XLR
Display	LCD
IP rating	IP20
Cooling	Temperature controlled fan
Power plug	Power-connector
Power consumption	2 - 0.98A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	330 x 210 x 360mm
Weight	11,00kg







IGNITE740 SERIES
WASH LED MOVING HEAD WITH ZOOM

- Wash moving head with zoom
- 7x 40W 4-in-1 RGBW LED
- Single pixel control
- Motorized linear zoom
- 17 or 45 DMX channels
- Variable CTO
- Master/slave synchronization
- Sound activated with adjustable sensitivity
- 0-100% electronic dimmer
- Control panel with LCD display
- DMX in/output via 3-pin XLR
- Powerconnector input/output
- Quick lock omega clamp included
- Powerconnector cable included

AVAILABLE OPTIONS		CARTON	PALLET
152.120	MOVING HEAD - **BLACK**	**2**	**90**
152.121	MOVING HEAD - **WHITE**	**2**	**90**
152.122	FLIGHTCASE FOR 2 PIECES	**1**	**16**
152.123	FLIGHTCASE FOR 4 PIECES	**1**	**8**

Colour temperature	2800K - 8500K
Light source	4-in-1 LED
LED colours	Red, Green, Blue, White
LED power	40W
Quantity of LEDs	7
Beam angle: Min	3°
Beam angle: Max	45°
Zoom	Yes
Illuminance	120.712 lx @ 1m
Head movement: Pan	540°
Head movement: Tilt	270°
Flash rate per second	1 - 18Hz
Modes	Automatic programs, DMX, Master/Slave
Sound to light mode	Yes
DMX channels	17, 45
DMX connection	3-pin XLR
Display	LCD
IP rating	IP20
Cooling	Temperature controlled fan
Power plug	P-Con
Power consumption	2.41 - 1.15A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	215 x 170 x 335mm
Weight	6,15kg



MHL1940

WASH LED MOVING HEAD WITH ZOOM

- Bee Eye moving head with rotating lenses and zoom
- 19x 40W 4-in-1 RGBW LEDs
- Aura effect ring: 48x RGB SMD LEDs
- Motorized zoom
- 26, 38, 102 or 114 DMX channels
- CTB and CTO filter
- Pre-programmed macro effects with variable speed
- 8 sound mode and 8 auto mode programs
- Master/slave synchronization
- Sound activated with adjustable sensitivity
- Scan position memory
- 0-100% smooth linear LED dimmer
- Single pixel control
- Control panel with LCD display
- DMX in/output via 3/5-pin XLR
- Powerconnector input/output
- Quick lock omega clamps included
- DMX and Powerconnector cables included

AVAILABLE OPTIONS		CARTON	PALLET
150.106	MOVING HEAD	**1**	**12**
150.105	2 PIECES IN FLIGHTCASE	**1**	**6**
150.107	FLIGHTCASE FOR 2 PIECES	**1**	**6**

Colour temperature	2700K - 8000K
Light source	4-in-1 LED
LED colours	Red, Green, Blue, White
LED power	40W
Quantity of LEDs	19
Beam angle: Min	6°
Beam angle: Max	60°
Zoom	Yes
Illuminance	94.960 lx @ 1m
Head movement: Pan	540°
Head movement: Tilt	270°
Auro effect ring	48x RGB SMD LEDs
Flash rate per second	1 - 25Hz
Modes	Automatic programs, DMX, Master/Slave
Sound to light mode	Yes
DMX connection	3-pin XLR, 5-pin XLR
Display	LCD
IP rating	IP20
Cooling	Temperature controlled fan
Power plug	Power-connector
Power consumption	2.97A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	405 x 405 x 412mm
Weight	16,15kg



MHL1240
WASH LED MOVING HEAD WITH ZOOM

- 12x 40W 4-in-1 RGBW LED
- Motorized zoom
- 11, 17, 18 or 58 DMX channels
- RDM/DMX Protocols
- Master/slave synchronization
- Sound activated with adjustable sensitivity
- 0-100% electronic dimmer
- Single pixel control
- Control panel with LCD display
- DMX in/output via 3-pin or 5-pin XLR
- Powerconnector input/output
- Quick lock omega clamps included
- DMX cable included
- Powerconnector cable included

AVAILABLE OPTIONS		CARTON	PALLET
150.101	MOVING HEAD	**1**	**16**
150.100	2 PIECES IN FLIGHTCASE	**1**	**4**

Colour temperature	2800K - 8000K
Light source	4-in-1 LED
LED colours	Red, Green, Blue, White
LED power	40W
Quantity of LEDs	12
Beam angle: Min	4.5°
Beam angle: Max	31°
Zoom	Yes
Illuminance	99.000 lx @ 3m
Head movement: Pan	540°
Head movement: Tilt	220°
Flash rate per second	0 - 18Hz
Modes	Automatic programs, DMX, Manual, Master/Slave
Sound to light mode	Yes
RDM	Yes
DMX channels	11, 17, 18, 58
DMX connection	3-pin XLR, 5-pin XLR
Display	LCD
IP rating	IP20
Cooling	Temperature controlled fan
Power plug	Power-connector
Power consumption	4.6 - 2.2A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	340x 270 x 460mm
Weight	14,70kg



MHL740
WASH LED MOVING HEAD WITH ZOOM

- 7x 40W 4-in-1 RGBW LED
- Motorized zoom
- 11, 17, 18 or 38 DMX channels
- RDM/DMX protocols
- Master/slave synchronization
- Sound activated with adjustable sensitivity
- 0-100% electronic dimmer
- Single pixel control
- Control panel with LCD display
- DMX in/output via 3-pin and 5-pin XLR
- Powerconnector input/output
- Quick lock omega clamps included
- DMX cable included
- Powerconnector cable included

AVAILABLE OPTIONS		CARTON	PALLET
150.104	MOVING HEAD	**1**	**32**
150.103	2 PIECES IN FLIGHTCASE	**1**	**8**

Colour temperature	2800K - 8000K
Light source	4-in-1 LED
LED colours	Red, Green, Blue, White
LED power	40W
Quantity of LEDs	7
Beam angle: Min	4.5°
Beam angle: Max	31°
Zoom	Yes
Illuminance	59.000 lx @ 3m
Head movement: Pan	540°
Head movement: Tilt	220°
Flash rate per second	0 - 18Hz
Modes	Automatic programs, DMX, Manual, Master/Slave
Sound to light mode	Yes
RDM	Yes
DMX channels	11, 17, 18, 38
DMX connection	3-pin XLR, 5-pin XLR
Display	LCD
IP rating	IP20
Cooling	Temperature controlled fan
Power plug	Power-connector
Power consumption	2.5 - 1.2A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	300 x 300 x 390mm
Weight	9,15kg





MHL760
WASH LED MOVING HEAD WITH ZOOM

- Bee Eye moving head with rotating lenses and zoom
- 7x 60W 4-in-1 RGBW LEDs
- Aura effect ring: 39 RGB SMD LEDs
- Motorized zoom
- 26, 38 or 66 DMX channels
- CTB and CTO filter
- Pre-programmed macro effects with variable speed
- 9 Sound and auto mode programs
- Master/slave synchronization
- Sound activated with adjustable sensitivity
- Scan position memory
- 0-100% smooth linear LED dimmer
- Single pixel control
- Control panel with LCD display
- DMX in/output via 3/5-pin XLR
- Powerconnector input/output
- Quick lock omega clamps included
- Powerconnector cable included

AVAILABLE OPTIONS		CARTON	PALLET
152.126	MOVING HEAD	**1**	**16**
152.127	2 PIECES IN FLIGHTCASE	**1**	**6**
152.129	FLIGHTCASE FOR 2 PIECES	**1**	**6**

Colour temperature	2700K - 8000K
Light source	4-in-1 LED
LED colours	Red, Green, Blue, White
LED power	60W
Quantity of LEDs	7
Beam angle: Min	6°
Beam angle: Max	60°
Zoom	Yes
Illuminance	120.643 lx @ 1m
Head movement: Pan	540°
Head movement: Tilt	270°
Auro effect ring	39x RGB SMD LEDs
Flash rate per second	1 - 21Hz
Modes	Automatic programs, DMX, Master/Slave
Sound to light mode	Yes
DMX channels	26, 38, 66
DMX connection	3-pin XLR, 5-pin XLR
Display	LCD
IP rating	IP20
Cooling	Temperature controlled fan
Power plug	Power-connector
Power consumption	4.12 - 2.07A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	335 x 215 x 365 mm
Weight	10,30kg





150.641





KUBE20
LINKABLE OUTDOOR BATTERY UPLIGHTS

- Battery-operated linkable wash light
- Light source: 20W 6-in-1 LED
- RGBWA-UV colour mixing
- Sturdy aluminium housing with magnetic feet
- Built-in Lithium battery
- Up to 12 hours operating time (depending on intensity)
- Recharge time of 5 hours
- Waterproof for outdoor use
- Automatic programs with adjustable speed
- 0-100% electronic dimmer
- Built-in wireless WDMX
- Control panel with OLED display
- Strobe with selectable speed
- Selectable colour fade and flash
- Including bracket and coupling accessories
- Including lens filters
- IR remote control

DMX IP65

150.640	BLACK	CARTON **6**	PALLET **168**
150.641	WHITE	CARTON **6**	PALLET **168**

Light source	6-in-1 COB LED
LED colours	Red, Green, Blue, Amber, White, UV
LED power	20W
Quantity of LEDs	1
Illuminance	1.849 lx @ 1m
Beam angle	24°
Field angle	47°
Flash rate per second	0 - 30Hz
IP rating	IP65
DMX channels	2, 6, 8, 11
DMX connection	Wireless DMX
Wireless DMX protocol	WDMX
Battery	7.4V - 6.8Ah
Power supply	100-240VAC 50/60Hz (9V Adapter)
Power plug	External power supply
Dimensions (L x W x H)	125 x 140 x 149mm (with bracket) 110 x 95 x 110mm (without bracket)
Weight	1,35kg





FCC30
FLIGHTCASE

- Designed to fit 6 pieces KUBE series uplight
- For charging up to 6 pieces uplights via the built-in sockets

150.643	CARTON **1**	PALLET **15**

Material thickness	9mm
Dimensions (L x W x H)	740 x 470 x 265mm
Weight	12,85kg







BBP62

OUTDOOR UPLIGHTER SET IN FLIGHTCASE WITH CHARGER

- Complete Uplight system with flightcase
- 6 weather resistant Uplights
- Each Uplighter contains a rechargeable Lithium battery pack
- Operable via WiFi app
- Flightcase with built-in charger for quick and easy charging
- LEDs: 6x 12W 6-in-1 RGBWA-UV LED
- Each Uplighter contains a built-in wireless EazyLink DMX receiver
- DMX, Auto or Stand-alone mode
- Master/slave synchronization
- OLED display with touchscreen
- 0-100% electronic dimmer
- Powerconnector input (Flightcase)
- IR remote controls



150.579 CARTON **1** PALLET **12**

DMX IP65

Light source	6-in-1 LED
LED colours	Red, Green, Blue, Amber, White, UV
LED power	12W
Quantity of LEDs	6
Illuminance	5.423 lx @ 1m
Beam angle	22°
Field angle	45°
Flash rate per second	1 - 24Hz
IP rating	IP65
DMX channels	7, 11
DMX connection	Wireless DMX
Wireless DMX protocol	EazyLink
Battery	11.1V - 13.2Ah
Power supply	100-240VAC 50/60Hz
Power plug	External power supply, P-Con
Dimensions (L x W x H)	140 x 140 x 202mm
Dimensions: Flightcase	635 x 455 x 315mm
Weight / Each	39,00kg / 3,05kg







150.604 CARTON **6** PALLET **216**

DMX IP65

Light source	6-in-1 LED
LED colours	Red, Green, Blue, Amber, White, UV
LED power	12W
Quantity of LEDs	9
Illuminance	6.390 lx @ 1m
Beam angle	28°
Field angle	48°
Flash rate per second	1 - 28Hz
IP rating	IP65
DMX channels	6, 12
DMX connection	Wireless DMX
Wireless DMX protocol	Eazylink
Battery	12.6V - 10.4Ah
Power consumption	0.553 - 0.235A
Power supply	100-240VAC 50/60Hz (12V Adapter)
Power plug	External power supply
Dimensions (L x W x H)	131 x 131 x 163mm
Weight	3,20kg

BBP59
OUTDOOR BATTERY UPLIGHT

- 9x 12W 6-in-1 RGBAW-UV LED
- Replaceable battery module
- IP65 rating for indoor and outdoor use
- OLED display with timer control and password lock
- Built-in wireless DMX receiver (EazyLink)
- Integrated folding foot for angular placement
- Up to 18 hours operating time (depending on intensity)
- Rapid recharge time of only 3 hours
- DMX and stand-alone mode
- 6 or 12 DMX channels
- DMX can be used in combination with EazyLink transmitters
- Sound activated with adjustable sensitivity
- Auto mode with adjustable speed
- Master/slave synchronization
- 0-100% electronic dimmer
- Strobe with selectable speed
- IR remote control



FCC10
FLIGHTCASE

- Designed to fit 8 pieces BBP54 or BBP59 uplight fixtures and 8 battery packs
- Charge up to 8 pieces uplights and extra 8 pieces battery packs together
- Equipped with 2 butterfly locks
- Ballcorners and recessed handles
- Hinges to hold the top cover open

150.603 CARTON **1** PALLET **12**

Dimensions (L x W x H)	630 x 610 x 255mm
Weight	20,60kg









BBP54
OUTDOOR BATTERY UPLIGHT

- 4x 12W 6-in-1 RGBAW-UV LED
- For indoor and outdoor use
- OLED display with password lock
- Built-in wireless DMX receiver (EazyLink)
- Replaceable battery module
- Integrated folding foot for angular placement
- Up to 15 hours operating time (depending on intensity)
- Rapid recharge time of only 3 hours
- DMX and stand-alone mode
- 6 or 12 DMX channels
- DMX can be used in combination with EazyLink transmitters
- Sound activated with adjustable sensitivity
- Auto mode with adjustable speed
- Master/slave synchronization
- 0-100% electronic dimmer
- Strobe with selectable speed
- IR remote control



DMX IP54

150.602 CARTON **6** PALLET **216**

Light source	6-in-1 LED
LED colours	Red, Green, Blue, Amber, White, UV
LED power	12W
Quantity of LEDs	4
Illuminance	4238 lx @ 1m
Beam angle	23°
Field angle	44°
Flash rate per second	1 - 35Hz
IP rating	IP54
DMX channels	6, 12
DMX connection	Wireless DMX
Wireless DMX protocol	Eazylink
Battery	12.6V - 7.8Ah
Dimensions (L x W x H)	131 x 131 x 163mm
Weight	2,85kg



BBP5XB
REPLACEMENT BATTERY PACK

- Up to 15 hours operating time (depending on intensity)
- Charging time: 3 hours
- Power source: 12.6V – 7.8Ah
- Charging in uplight par or charging station (not included)
- For use with BBP54 (150.602) and BBP59 (150.604)

IP65

150.601 CARTON **30**

IP rating	IP65
Battery	12.6V - 7.8Ah
Dimensions (L x W x H)	120 x 50 x 130mm
Weight	1,00kg









BBP48
OUTDOOR BATTERY UPLIGHT

- 9x 12W 6-in-1 RGBAW-UV LED
- IP65 rating for indoor and outdoor use
- OLED display
- Built-in wireless WDMX
- Mobile app for control
- Integrated folding foot for angular placement
- Built-in battery pack
- Up to 18 hours operating time (depending on intensity)
- Rapid recharge time of only 3 hours
- DMX and stand-alone mode
- Sound activated with adjustable sensitivity
- Auto mode with adjustable speed
- Master/slave synchronization
- 0-100% electronic dimmer
- Strobe with selectable speed
- IR remote control

DMX IP65

150.608 CARTON **8** PALLET **64**

Light source	6-in-1 LED
LED colours	Red, Green, Blue, Amber, White, UV
Quantity of LEDs	9
Illuminance	6.248 lx @ 1m
Beam angle	25°
Field angle	49°
Flash rate per second	1 - 20Hz
IP rating	IP65
DMX channels	2, 6, 8, 11
DMX connection	Wireless DMX
Wireless DMX protocol	WDMX
Battery	11.1V - 12Ah
Power consumption	0.587 - 0.317A
Power supply	100-240VAC 50/60Hz (12V Adapter)
Power plug	External power supply
Dimensions (L x W x H)	135 x 135 x 150 mm
Weight	2,85kg



FCC12
FLIGHTCASE

- Designed to fit 8 pieces BBP48 Uplight
- Designed to charge up to 8 Uplights via the built-in sockets

150.609 CARTON **1** PALLET **12**

Material thickness	9mm
Dimensions (L x W x H)	630 x 610 x 255mm
Weight	20,00kg









HELIOS
OUTDOOR UPLIGHT KIT

- Uplight with built-in battery and decorative attachments
- Including magnetic finishing ring, sphere and tube-shaped top unit
- IP65 weatherproof for indoor and outdoor use
- 6x 15W 6-in-1 RGBWA-UV LEDs
- Up to 15 hours operating time (depending on colour and intensity)
- Wireless DMX (WDMX and EazyLink)
- Wi-Fi control via app
- Auto mode with adjustable speed
- Master/slave synchronization
- Ultra high frequency dimming (64KHz)
- Control panel with OLED display
- Key lock on the uplight unit



DMX IP65

150.616 CARTON **4** PALLET **64**

Light source	6-in-1 LED
Colours	Red, Green, Blue, Amber, White, Ultra Violet
LED power	15W
Quantity of LEDs	6
Illuminance	10.895 lx @ 1m
Beam angle	25°
Field angle	38°
Flash rate per second	1 - 20Hz
IP rating	IP65
DMX channels	2, 6, 8, 11
DMX connection	Wireless DMX
Wireless DMX protocol	Eazylink, WDMX
Battery	11.1V - 8.8Ah
Power consumption	0.535 - 0.290A
Power supply	100-240VAC 50/60Hz (12V Adapter)
Power plug	External power supply
Dimensions (L x W x H)	155 x 155 x 145mm
Weight	2,65kg











BBP60
6 UPLIGHTS IN FLIGHTCASE WITH BUILT-IN CHARGER

- 9x 12W 6-1 RGBWA-UV LED
- DMX and Stand-alone mode
- Master/slave synchronization
- Sound activated with adjustable sensitivity
- Auto mode
- Beam angle 27°
- 0-100% electronic dimmer
- Strobe: 1-12Hz
- DMX in/output via 3-pin XLR
- Each Uplight contains a built-in wireless DMX receiver
- One wireless transmitter included in the set
- Each Uplight contains a Lithium battery pack
- Flightcase with built-in charger for quick and easy charging
- Powerconnector input


DMX

150.587 CARTON **1** PALLET **6**

Light source	6-in-1 LED
LED colours	Red, Green, Blue, Amber, White, UV
LED power	9x 12W
Illuminance	13.076 lx @ 1m
Beam / Field angle	27° / 42°
Flash rate per second	0 - 12.5Hz
IP rating	IP20
DMX channels	6, 10
DMX connection	3-pin XLR, Wireless DMX
Wireless DMX protocol	EazyLink
Battery	12V - 25Ah
Power consumption	90W
Power supply	100-240VAC 50/60Hz
Power plug	P-Con
Dimensions: Flightcase	670 x 550 x 450mm
Weight / Each	51,40kg / 4,65kg







DMX IP65

STARCOLOR128O
OUTDOOR WASH LIGHT

- 32x 40W 4-in-1 LEDs (controlled per row)
- RGBW colour mixing
- IP65 rated waterproof design
- Tempered glass lens and watertight internal gaskets
- DMX512, CRMX and Wireless Solution WDMX
- Stand alone and Master/slave Mode
- 16 Bit dimmer
- PWM: 800Hz/1200Hz/2000Hz/ 3600Hz/6000Hz/2000Hz/25KHz
- Control panel with full-colour 2.4" TFT display
- DMX in/output via 3/5-pin XLR, Artnet
- Power connector (P-Con) TRI in/output
- Multiple built-in colour pre-sets and auto programs
- Quick lock omega clamps included

150.140 CARTON **1** PALLET **26**

Light source	4-in-1 LED
Colours	Red, Green, Blue, White
LED power	40W
Quantity of LEDs	32
Beam / Field angle	21° / 31°
Illuminance	183.420 lx @ 1m
Flash rate per second	0 - 20Hz
DMX channels	3, 4, 6, 14, 16, 30
DMX connection	3/5-pin XLR, RJ45, Wireless DMX
Wireless DMX protocol	W-DMX™, CRMX
Modes	Auto programs, DMX, Master/Slave
IP rating	IP65
Cooling	Temperature controlled fan
Display	LCD
Power plug	P-Con TRI
Power consumption	8.19 - 3.84A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	480 x 230 x 405mm
Weight	15,60kg





STARCOLOR1280
BARNDOOR

- For use with the StarColor 1280 series
- Adjust light direction and width

150.141 CARTON **4** PALLET **48**

Dimensions (L x W x H)	585 x 220 x 425mm
Weight	1,30kg



STARCOLOR1280
BASE

- For use with the StarColor 1280
- Metal base with rubber feet

150.142 CARTON **4** PALLET **64**

Dimensions (L x W x H)	490 x 295 x 110mm
Weight	3,00kg



STARCOLOR1280
FILTER 45°

- For use with the StarColor 1280
- Attachment by magnet
- 45°

150.143 CARTON **10**

Dimensions (L x W x H)	450 x 240 x 10mm
Weight	0,33kg



STARCOLOR1280
FILTER 95°

- For use with the StarColor 1280
- Attachment by magnet
- 95°

150.144 CARTON **10**

Dimensions (L x W x H)	450 x 240 x 10mm
Weight	0,33kg



FLC1280 2
FLIGHTCASE

- Designed to fit 2 pieces StarColor1280 Wall Washers
- Butterfly locks and aluminium profiles all around
- Ballcorners and recessed handles
- Provided with tailor-made solid foam on the inside

150.145 CARTON **1** PALLET **8**

Dimensions (L x W x H)	650 x 590 x 590mm
Weight	15,00kg







DMX IP65

STARCOLOR540Z
OUTDOOR WASH LIGHT WITH ZOOM

- Professional RGBW Wall Wash with zoom
- IP65 rated waterproof design
- 36x 15W High Power RGBW LEDs (controlled per row)
- 72x 0.2W RGB LEDs backlight
- Motorized Zoom-function 7° - 58°
- Tempered glass lens and watertight internal gaskets
- DMX512 and Wireless Solution WDMX
- Stand alone and Master/slave Mode
- 16 Bit dimmer
- PWM: 600/1200/2400/4800Hz
- Control panel with full-colour 2.4" TFT display
- DMX in/output via 3-pin XLR
- Power connector (P-Con) TR1 in/output
- Multiple built-in colour pre-sets and auto programs
- Quick lock omega clamp included

150.150 CARTON **1** PALLET **22**

Light source	Single colour LED, 4-in-1 LED
LED colours	Red, Green, Blue, White
LED power / Backlight	15W / 0.2W
Quantity of LEDs / Backlight	36 / 72
Beam angle	7° - 58°
Illuminance	76.689 lx @ 1m
Flash rate per second	0 - 20Hz
DMX channels	8, 16, 19, 21, 29, 35, 38
DMX connection	3-pin XLR, Wireless DMX
Wireless DMX protocol	WDMX
Modes	Auto programs, DMX, Master/Slave
IP rating	IP65
Cooling	Temperature controlled fan
Display	LCD
Power plug	P-Con TR1
Power consumption	3.7 - 1.76A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	575 x 270 x 450mm
Weight	14,35



FLC5402
FLIGHTCASE FOR 2 PIECES

- Sturdy wall wash flightcase with handles and wheels
- Designed to fit 2 pieces StarColor540 Wall Washers

150.154 CARTON **1** PALLET **8**

Dimensions (L x W x H)	650 x 590 x 590mm
Weight	15,00kg



FLC5404
FLIGHTCASE FOR 4 PIECES

- Sturdy wall wash flightcase with handles and wheels
- Designed to fit 4 pieces StarColor540 Wall Washers

150.155 CARTON **1** PALLET **4**

Dimensions (L x W x H)	1160 x 590 x 590mm
Weight	21,50kg







DMX IP65

150.151 CARTON **1** PALLET **26**

Light source	Single colour LED, 4-in-1 LED
LED colours	Red, Green, Blue, White
LED power	15W
Quantity of LEDs	36
Beam angle	21°
Illuminance	119.173 lx @ 1m
Flash rate per second	0 - 20Hz
DMX channels	4, 9, 11, 16, 21, 27, 30
DMX connection	3-pin XLR, Wireless DMX
Wireless DMX protocol	WDMX
Modes	Auto programs, DMX, Master/Slave
IP rating	IP65
Cooling	Temperature controlled fan
Display	LCD
Power plug	P-Con TRI
Power consumption	4.12 - 1.96A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	510 x 120 x 350mm
Weight	13,05kg

STARCOLOR540
OUTDOOR WASH LIGHT

- Professional RGBW Wall Wash
- IP65 rated waterproof design
- 36x 15W High Power RGBW LEDs (controlled per row)
- Tempered glass lens and watertight internal gaskets
- DMX512 and Wireless Solution WDMX
- Stand alone and Master/slave Mode
- 16 Bit dimmer
- PWM: 600/1200/2400/4800Hz
- Control panel with full-colour 2.4" TFT display
- DMX in/output via 3-pin XLR
- Power connector (P-Con) TR1 in/output
- Multiple built-in colour pre-sets and auto programs
- Quick lock omega clamp included



STARCOLOR540
BARNDOOR

- For use with the StarColor540 series
- Adjust light direction and width
- Durable metal construction

150.156 CARTON **4** PALLET **48**



STARCOLOR540
BASE

- For use with the StarColor540
- Metal base with rubber feet

150.157 CARTON **4** PALLET **64**



STARCOLOR540
FILTER

- For use with the StarColor540
- Attachment by magnet
- Material: acrylic

	150.158	150.159	150.160
CARTON	10	10	10
Angle	45°	95°	60° x 10°





IP66

STARCOLOR360
OUTDOOR WASH LIGHT

- 24x 15W powerful 5-in-1 LEDs
- RGBWA colour mixing
- For architectural and entertainment lighting
- Waterproof IP66 for outdoor use
- Convection cooling via cooling ribs
- Static colours
- LED panel can be tilted and fixed
- Auto mode with adjustable speed
- DMX and Stand-alone mode
- Master/slave function
- Control panel with LCD display

150.692 CARTON **2** PALLET **28**

Light source	5-in-1 LED
LED colours	Red, Green, Blue, Amber, White
LED power	15W
Quantity of LEDs	24
Beam angle	28° x 33°
Illuminance	9.927 lx @ 1m
Flash rate per second	0 - 20Hz
DMX channels	3, 4, 5, 6, 7, 12
DMX connection	3-pin XLR
Modes	Automatic programs, DMX, Manual
IP rating	IP66
Power plug	Fixed power lead
Power consumption	300W
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	200 x 430 x 185mm
Weight	11,30kg



FL2
FLIGHTCASE

- Designed to fit 2 pieces StarColor360

150.696 CARTON **1** PALLET **10**

Dimensions (L x W x H)	630 x 490 x 410mm
Weight	14,70kg



FL4
FLIGHTCASE

- Designed to fit 4 pieces StarColor360

150.697 CARTON **1** PALLET **5**

Dimensions (L x W x H)	1150 x 490 x 410mm
Weight	21,30kg

STARCOLOR360
BARNDOOR

- For use with the StarColor360
- For models from serial number 14681
- Adjust light direction and width
- Durable metal construction

150.695 CARTON **4** PALLET **136**







150.167





STARCOLOR54 / TOUR
OUTDOOR WALL WASH LIGHT

IP65

- Compact Wash Light
- IP65 rating, for indoor and outdoor use
- Robust Aluminium housing
- 54x 1W LEDs (18x R/18x G/18x B)
- Beam angle 60° x 10°
- RGB colour mixing
- RDM function
- Pre-programmed shows
- No fan, convection cooling via cooling ribs
- 0-100% electronic dimmer
- Control panel with OLED display
- Waterproof connectors
- For architectural and entertainment use
- IR remote control
- Omega bracket included

AVAILABLE CONNECTOR OPTIONS		CARTON	PALLET
150.164	FIXED POWER/DMX LEADS	6	96
150.167	P-CON TR/DMX LEADS	6	96

Light source	Single colour LED
LED colours	Red, Green, Blue
LED power	1W
Quantity of LEDs	54
Beam angle	60° x 10°
Illuminance	18.685 lx @ 0.5m
Flash rate per second	1 - 20Hz
DMX channels	3, 5, 8, 13
Modes	Automatic programs, DMX, Manual, Master/Slave
IP rating	IP65
Cooling	Convection
Display	OLED
Power plug	Fixed power lead
Power consumption	0.44 - 0.222A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	426 x 53 x 90mm
Weight	2.65kg

FL54
FLIGHTCASE

- Designed to fit 8 pieces StarColor54
- Butterfly locks and aluminium profiles all around

150.168	CARTON 1	PALLET 8

Dimensions (L x W x H)	630 x 490 x 410mm
Weight	14.70kg









STARCOLOR72B
OUTDOOR FLOOD LIGHT WITH BATTERY PACK

- 9x 8W 5-in-1 LEDs
- RGBWA colour mixing
- Up to 15 hours operating time (depending on intensity)
- Built-in WDMX receiver
- For architectural and entertainment use
- Robust aluminium housing
- IP65 rating, for indoor and outdoor use
- DMX channels: 5/7/9
- Operating mode: Auto, DMX
- Can also be operated via WiFi with the **LED LAMP** app
- Pre-programmed shows
- No fan, convection cooling via cooling ribs
- 16-bit PWM dimming
- Control panel with LED display
- Waterproof connectors, DMX and Power Connector (P-Con) TR1 (in/out)
- Including IR remote control

150.750 CARTON **4** PALLET **72**

DMX IP65

Light source	5-in-1 LED
LED colours	Red, Green, Blue, Amber, White
LED power	8W
Quantity of LEDs	9
Beam angle	21°
Illuminance	12.170 lx @ 1m
Flash rate per second	1 - 20Hz
DMX channels	5, 7, 9
DMX connection	3-pin XLR, Wireless DMX
Wireless DMX protocol	WDMX
Modes	Automatic programs, DMX, Manual, Master/Slave
IP rating	IP65
Cooling	Convection
Display	LCD
Power plug	P-Con TR1
Power consumption	0.732 - 0.360A
Battery	11.1V - 13.2Ah
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	210 x 215 x 280mm
Weight	5,00kg

FL72B
FLIGHTCASE

- Designed to fit 6 pieces StarColor72B (150.750)
- Butterfly locks and aluminium profiles all around
- Ballcorners and recessed handles
- Hinges to hold the top cover open
- Provided with tailor-made solid foam on the inside

150.752 CARTON **1** PALLET **8**

Dimensions (L x W x H)	710 x 530 x 295mm
Weight	20,00kg









IP65

STARCOLOR200 SERIES
OUTDOOR FLOOD LIGHTS

- Compact flood light
- IP65 rating, for indoor and outdoor use
- Robust aluminium housing
- 24x 10W 4-in-1 LEDs
- RGBW **(150.734)**, RGBA **(150.736)** colour mixing
- White LED colour temperature: 6200K
- DMX channels: 4/8/10
- Pre-programmed shows
- No fan, convection cooling via cooling ribs
- 16-bit PWM dimming
- Control panel with LED display
- Waterproof connectors, DMX and Power Connector (P-Con) TR1 (in/out)
- Bracket with quick lock system
- For architectural and entertainment use

	150.734	150.736
NAME	STARCOLOR200	STARCOLOR205
CARTON	4	4
PALLET	80	80
Light source	4-in-1 LED	
LED colours	Red, Green, Blue, White	Red, Green, Blue, Amber
LED power	10W	
Quantity of LEDs	24	
Beam angle	21°	
Illuminance	41.084 lx @ 1m	38.408 lx @ 1m
Flash rate p/sec		
DMX channels	1 - 24Hz	
DMX connection	4, 8, 10	
Modes	3-pin XLR	
IP rating	Automatic programs, DMX, Manual	
Cooling	IP65	
Display	Convection	
Power plug	LED	
Power consumption	1.83 - 1.013A	P-CON TR1 2.51 - 1.305A
Power supply		
Dimensions	100-240VAC 50/60HZ	
Weight	5,20kg	140 x 270 x 300mm 5,20kg



FLC540
FLIGHTCASE

- Designed to fit 6 pieces StarColor200 and 205

150.739 CARTON **1** PALLET **12**

Dimensions	820 x 510 x 375mm
Weight	19,75kg



STARCOLOR200/205
FILTER

- For use with the StarColor200 and 205
- Attachment by magnet
- 40°
- Material: acrylic

150.749 CARTON **6**







IP65

STARCOLOR SERIES
OUTDOOR FLOOD LIGHTS

- Compact flood light
- IP65 rating, for indoor and outdoor use
- Robust aluminium housing
- 8W 4-in-1 LEDs
- RGBW **(150.730)**, RGBA **(150.754)** colour mixing
- White led color temperature: 6200K
- DMX Channels: 4/8/10
- Pre-programmed shows
- No fan, convection cooling via cooling ribs
- 16-bit PWM dimming
- Colour: Black
- Control panel with LED display
- Waterproof connectors, DMX and Power Connector (P-Con) TRI (in/out)
- Bracket with quick lock system
- For architectural and entertainment use

	150.730	150.754
NAME	**STARCOLOR128**	**STARCOLOR135**
CARTON	**4**	**4**
PALLET	**96**	**96**
Light source	4-in-1 LED	
LED colours	Red, Green, Blue, White	Red, Green, Blue, Amber
LED power	8W	
Quantity of LEDs	16	
Beam angle	21°	
Illuminance	17.902 lx @ 1m	17.060 lx @ 1m
Flash rate p/sec	1 - 24Hz	
DMX channels	4, 8, 10	
DMX connector	3-pin XLR	
Modes	Automatic programs, DMX, Manual	
IP rating	IP65	
Cooling	Convection	
Display	LED	
Power plug	P-Con TRI	
Power consumption	1.97 - 0.92A	
Power supply	100-240VAC 50/60HZ	
Dimensions	230 x 240 x 120 mm	
Weight	3,40kg	



FL128
FLIGHTCASE

- Designed to fit 8 pieces StarColor

150.731 CARTON **1** PALLET **10**

Dimensions	735 x 560 x 370mm
Weight	21,30kg



STARCOLOR128
FILTER

- For use with the StarColor128 MKII
- Attachment by magnet
- 40°
- Material: acrylic

150.748 CARTON **6**







IP65

STARCOLOR SERIES
OUTDOOR FLOOD LIGHTS

- Compact flood light
- IP65 rating, for indoor and outdoor use
- Robust aluminium housing
- 8W 4-in-1 LEDs
- RGBW **(150.732)**, RGBA **(150.753)** colour mixing
- White led color temperature: 6200K
- DMX Channels: 4/8/10
- Pre-programmed shows
- No fan, convection cooling via cooling ribs
- 16-bit PWM dimming
- Colour: Black
- Control panel with LED display
- Waterproof connectors, DMX and Power Connector (P-Con) TR1 (in/out)
- Bracket with quick lock system
- For architectural and entertainment use

	150.732	150.753
NAME	**STARCOLOR72**	**STARCOLOR75**
CARTON	**6**	**6**
PALLET	**144**	**144**
Light source	4-in-1 LED	
LED colours	Red, Green, Blue, White	Red, Green, Blue, Amber
LED power	8W	
Quantity of LEDs	9	
Beam angle	21°	
Illuminance	12.170 lx @ 1m	11.561 lx @ 1m
Flash rate p/sec	1 - 24Hz	
DMX channels	4, 8, 10	
DMX connector	3-pin XLR	
Modes	Automatic programs, DMX, Manual	
IP rating	IP65	
Cooling	Convection	
Display	LED	
Power plug	P-Con TR1	
Power consumption	0.99 - 0.45A	
Power supply	100-240VAC 50/60HZ	
Dimensions	200 x 110 x 210mm	
Weight	2,45kg	



FL72
FLIGHTCASE

- Designed to fit 8 pieces StarColor

150.733 CARTON **1** PALLET **10**

Dimensions	705 x 495 x 340mm
Weight	20,00kg



STARCOLOR72
FILTER

- For use with the StarColor72 MKII
- Attachment by magnet
- 40°
- Material: acrylic

150.747 CARTON **6**







SB400IP
OUTDOOR STAGE BLINDER IP65

- 4x 100W Warm White COB LEDs
- 2-in-1: Stage Blinder and Strobe
- Rugged die-cast aluminium exterior
- 4-button control panel and LED menu display
- DMX/RDM and Stand-alone mode
- 4 or 8 DMX channels
- Master/slave function
- Sound activated with adjustable sensitivity
- Auto mode with adjustable speed
- IP65 rated DMX and Powerconnector TR in/out

IP65

150.454 CARTON **1** PALLET **24**

Light source	Single colour LED
Colours	Warm White
LED power	100W
Quantity of LEDs	4
Beam angle	48
Field angle	74
Illuminance	17.300 lx @ 1m
Wavelength	400- 780
Flash rate per second	1 - 23Hz
DMX channels	4, 8
DMX connection	3-pin XLR
Modes	Automatic programs, DMX, Manual, Master/Slave
IP rating	IP65
Cooling	Fan
Display	LED
Power plug	P-Con TRI
Power consumption	3.45 - 1.62A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	390 x 390 x 245 mm
Weight	12,70kg







SB420IP
OUTDOOR STAGE BLINDER IP65

- 4x 85W Warm White COB LEDs
- 4x 20W Amber COB LEDs
- Tungsten mode
- Rugged die-cast aluminium exterior
- 4-button control panel and LED menu display
- DMX/RDM and Stand-alone mode
- 1, 3, 5 or 9 DMX channels
- Master/slave function
- Auto mode with adjustable speed
- IP65 rated DMX and Powerconnector TR in/out

IP65

150.455 CARTON **1** PALLET **24**

Light source	2-in-1 LED
Colours	Amber, Warm White
LED power	100W
Quantity of LEDs	4
Beam angle	48
Field angle	74
Illuminance	17.300 lx @ 1m
DMX channels	1, 3, 5, 9
DMX connection	3-pin XLR
Modes	Automatic programs, DMX, Manual, Master/Slave
IP rating	IP65
Cooling	Convection
Display	LED
Power plug	P-Con TRI
Power consumption	3.28 - 1.50A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	390 x 390 x 245 mm
Weight	12,70kg









IP65

150.456 CARTON **2** PALLET **32**

Light source	2-in-1 LED
LED colours	Amber, White
LED power	4x 85W/20W
Quantity of LEDs	2
Beam angle	48°
Field angle	74°
Illuminance	17.300 lx @ 1m
DMX channels	1, 3, 4, 8
DMX connection	3-pin XLR, 5-pin XLR
Modes	Automatic programs, DMX, Manual, Master/Slave
IP rating	IP65
Cooling	Convection
Display	LED
Power consumption	2.56 - 1.4A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	405 x 200 x 310mm
Weight	7,60kg

SB220IP
OUTDOOR STAGE BLINDER IP65

- 2x 85W Warm White COB LEDs
- 2x 20W Amber COB LEDs
- Tungsten mode
- Rugged die-cast aluminium exterior
- 4-button control panel and LED menu display
- DMX/RDM and Stand-alone mode
- 1, 2, 3 or 5 DMX channels
- Master/slave function
- Auto mode with adjustable speed
- IP65 rated DMX and Powerconnector TR in/out
- Quick-lock bracket for different types of mounting
- With mounting bracket and power cable









IP65

NEUTRON-DOT
OUTDOOR LINKABLE HYBRID FIXTURE

- High power warm white LED (2700K)
- Pixel-controllable RGB Aura backlight
- Compact and lightweight aluminium housing
- IP65 Rating, for indoor and outdoor use
- Beam angle of 23 degrees
- 16-bit PWM dimming
- Smart coupling system (2 pieces included)
- Control panel with OLED display
- Key lock option and possibility of reverse display
- Auto mode
- Intelligent cooling system
- Weatherproof connectors, DMX and Power Connector TR (in/out)
- For architectural and entertainment use

151.525 CARTON **4** PALLET **96**

Light source	3-in-1 LED, Single WW LED
LED colours: Center LED	Warm White
LED colours: Aura Ring	Red, Green, Blue
LED power	60W
LED power: Backlight	1W
Quantity of backlight LEDs	16
Colour temperature	2700K
Beam angle	23°
Illuminance	61.331 lx @ 1m
Flash rate per second	0 - 20Hz
RDM	Yes
DMX channels	1, 3, 4, 16, 64
DMX connection	3-pin XLR
IP rating	IP65
Cooling	Convection
Power plug	P-Con TRI
Power consumption	0.944 - 0.473A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	142 x 142 x 218mm
Weight	2,30kg



FL-DOT
FLIGHTCASE

- Designed to fit 8 fixtures

151.526 CARTON **1** PALLET **12**

Dimensions (L x W x H)	630 x 610 x 255mm
Weight	17,60kg

NEUTRON-DOT
BRACKET



- To mount 2 or 4 fixtures together

151.527 CARTON **4**

NEUTRON-DOT
FROST FILTER 60°



- Creates a 60° beam angle

151.528 CARTON **16**

NEUTRON-DOT
BARNDOOR



- Adjust light direction and width

151.529 CARTON **16**

NEUTRON-DOT
COUPLING BLOCK





- To connect fixtures together

151.530 CARTON **24**







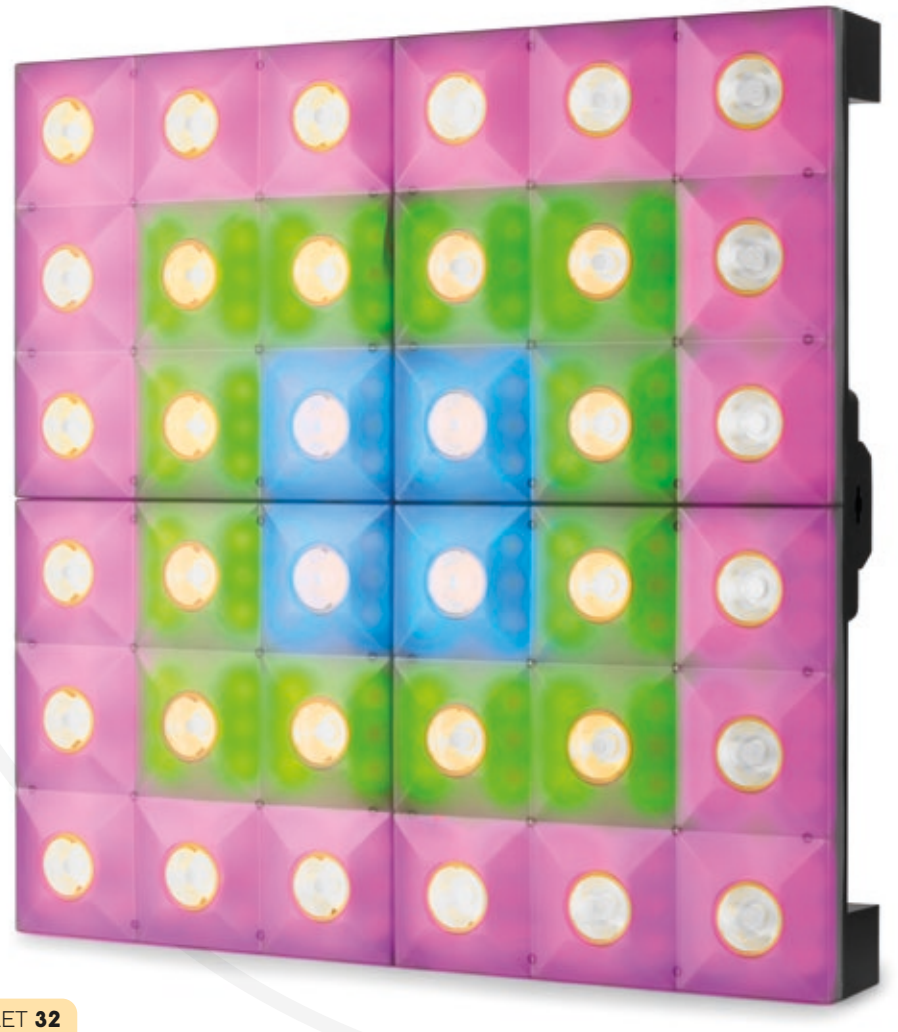

150.675 CARTON **4** PALLET **32**

Light source	Single colour LED, 3-in-1 LED
LED colours	Red, Green, Blue, Warm White
LED power	3W
Quantity of LEDs	36
LED power: Backlight	SMD
Quantity of backlight LEDs	216
Beam angle	5°
Field angle	10°
Illuminance	15.000 lx @ 1m
Flash rate per second	0 - 20Hz
DMX channels	8, 144
DMX connection	3-pin XLR
Modes	Automatic programs, DMX, Manual, Master/Slave
IP rating	IP20
Cooling	Convection
Display	OLED
Power plug	P-Con
Power consumption	1.8 - 0.9A
Power supply	110-250VAC 50/60Hz
Dimensions (L x W x H)	500 x 500 x 80mm
Weight	6,70kg

LCB366
HYBRID LED PANEL

- 36x 3W Warm White LEDs for sharp 5° beams
- 216x SMD RGB LEDs (backlight)
- Single pixel control
- RDM/DMX protocols
- Built-in programs
- Silent operation, natural convection cooling system
- Linking multiple panels together with quick locks
- OLED colour display
- Electronic dimming: 0 - 100%
- Power Connector TR input/output

LCB366
RIGGING BAR

- Rigging bar for a LCB366 LED panel
- Up to 5 panels can be hung vertically

150.676 CARTON **8** PALLET **48**

Weight	2,70kg





KRATOS
OUTDOOR LED TUBE

- LED Tube with 288 4-in-1 RGBW LEDs
- RGBW colour mixing, full dimming and strobe effects
- Full control of 32, 16 and 8 pixel groups via DMX
- Pre-programmed chases with adjustable speed
- Weatherproof IP65 solid housing
- Battery operated (Battery life up to 20 hours)
- Battery charging time: 8 to 10 Hours
- Built-in WDMX
- IOS and Android application for control through WiFi
- CRI ≥95 (Colour Rendering Index)

150.659 contains

- 8x Kratos LED Tube
- 8x Floor stand
- 8x DMX splitter
- 16x DMX cable
- 16x Eye bolt
- 1x Remote control
- 1x Power unit with charging cables
- 8x Complete tube holder set
- 1x Flightcase

150.658 contains

- 1x Kratos LED Tube
- 1x Floor stand
- 1x DMX splitter
- 2x DMX cable
- 2x Eye bolt
- 1x Remote control

AVAILABLE OPTIONS		CARTON	PALLET
150.658	OUTDOOR LED TUBE	**4**	**32**
150.659	8 PIECES IN FLIGHTCASE	**1**	**4**
150.657	WING PLATE + TUBE HOLDERS	**10**	**-**

DMX IP65

Light source	4-in-1 LED
LED colours	Red, Green, Blue, White
Colour temperature	2800K - 10000K
Quantity of LEDs	288
Beam angle	180°
Flash rate per second	1 - 20Hz
Modes	Automatic programs, DMX, Manual, Master/Slave
DMX channels	2, 4, 6, 11, 32, 64, 128
DMX connection	3-pin XLR, Wireless DMX
Wireless DMX protocol	WDMX
IP rating	IP65
Cooling	Convection
Display	LCD
Power plug	P-Con
Power consumption	4.68 - 2.55A
Battery	12V - 19.6Ah
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	Ø52 x 1195mm
Weight (Kit)	56,30kg







IP65

153.282 CARTON **1** PALLET **28**

Light source	4-in-1 LED
LED colours	Red, Green, Blue, White
LED power	40W
Colour temperature	2700K - 8000K
Quantity of LEDs	10
Beam angle: Min	3°
Beam angle: Max	37°
Field angle: Min	6°
Field angle: Max	59°
Illuminance	20.666 lx @ 1m
Flash rate per second	1 - 24Hz
Modes	Auto programs, DMX, Master/Slave
DMX channels	13, 26, 27, 28, 29, 46, 47
DMX connection	3-pin XLR, 5-pin XLR
IP rating	IP65
Cooling	Temperature controlled fan
Display	LCD
Power plug	P-Con TRI
Power consumption	2.98 - 1.40A
Power supply	100-240VAC 50/60HZ
Dimensions (L x W x H)	536 x 159 x 398mm
Weight	17,95kg

LMB1040IP
OUTDOOR MOVING BAR WITH ZOOM

- High performance outdoor Moving Bar with zoom
- Source: 10x 40W 4-in-1 LEDs
- Single pixel control
- Effect: Beam/Wash with RGBW colour mixing
- Tilt movement: 240°
- Motorized zoom (3° - 37°)
- Linear dimmer: 0-100%
- DMX and Stand-alone mode
- Master/slave function
- Auto mode with adjustable speed
- Control panel with LCD display
- Efficient low noise fan cooling system
- DMX in/output via 3/5-pin IP65 XLR
- P-Con TR input/output
- Including Omega brackets

FCLMB1040
FLIGHTCASE

- Designed to fit 2 pieces of LMB1040 moving bars
- 2 separated compartments inside
- Butterfly locks and aluminium profiles all around
- Ball corners and recessed handles
- Provided with tailor-made solid foam on the inside

153.284 CARTON **1** PALLET **8**

Material thickness	9mm
Weight	25,00kg





LCB1215IP
OUTDOOR LED BAR RGBAW-LIME

- 12x 15W 6-in1 LEDs
- RGBAW+Lime colour mixing
- Die-cast aluminium housing
- Single Pixel Control
- Noiseless and flicker-free operation
- Waterproof IP65 for outdoor use
- 9 different DMX modes
- DMX, Stand-alone or master/slave mode
- Auto mode with adjustable speed
- RDM Function
- 4 selectable dimmer curves
- DMX in/output via 3-pin XLR
- Control panel with LCD display
- Key-lock function
- Including brackets with Quicklock

150.721 CARTON **2** PALLET **24**

Light source	6-in-1 LED
LED colours	Red, Green, Blue, Amber, White, Lime
LED power	15W
Quantity of LEDs	12
Dispersion	21° - 51°
Illuminance	13.000lx @ 1m
Flash rate p/sec	0 - 20Hz
Modes	Automatic programs, DMX, Master/Slave
DMX channels	2, 8, 11, 38, 41, 74, 77
DMX connection	3-pin XLR
Daisy chain	Yes (max. 6 bars)
IP rating	IP65
Cooling	Fan
Display	LCD
Power plug	P-Con TRI
Power consumption	1.12 - 2.27A
Power supply	100-240VAC 50/60Hz
Dimensions	1000 x 90 x 205mm
Weight	10,50kg

FCLCB12
FLIGHTCASE

- Designed to fit 4 pieces LCB1215IP LED Bars (150.721)

150.725 CARTON **1** PALLET **4**

Dimensions	1055 x 875 x 400mm
Weight	28,60kg





LCB1215IP
DIFFUSION FILTER 45°

- Designed to break up and distribute light evenly

150.726 CARTON **10**



LCB1215IP
DIFFUSION FILTER 90°

- Designed to break up and distribute light evenly

150.727 CARTON **10**



LCB1215IP
LENS HOOD

- Single-side light shield to hide the light beams and protect the fixture

150.728 CARTON **10**





LUCID
LED BARS

- LED BAR with 30W COB LEDs
- RGBW Colour mixing
- Single pixel control
- DMX and Stand-alone mode
- Master/slave function
- Sound activation with adjustable sensitivity
- Auto mode with adjustable speed
- DMX in/output via 3/5-pin XLR
- Power-connector input/output
- Aluminium housing
- Control panel with LCD display
- Bracket with Quick lock Omega
- IR remote control



	150.214	150.216
NAME	**LUCID 2.4**	**LUCID 2.8**
CARTON	**2**	**1**
PALLET	**42**	**24**
Light source	4-in-1 COB LED	
LED colours	Red, Green, Blue, White	
LED power	30W	
Quantity of LEDs	4	8
Beam angle	45°	
Illuminance	3.300 lx @ 1m	4.300 lx @ 1m
DMX channels	3, 4, 5, 6, 8, 16, 20	3, 4, 5, 6, 12, 32, 36
DMX connection	3-pin XLR, 5-pin XLR	
Modes	Automatic programs, DMX, Master/Slave	
Daisy chain	Yes (max. 8 bars)	
IP rating	IP20	
Cooling	Fan	
Display	LCD	
Power plug	P-Con	
Power consumption	0.475A	0.85A
Power supply	220-240VAC 50Hz	
Dimensions	490 x 150 x 242 mm	980 x 150 x 242 mm
Weight	5,25kg	10,00kg



LUCID 2.4
FILTER 25°

- Designed to bundle the light
- Excellent dimensional stability
- Material: acrylic and metal
- Light transmittance: >97%

150.217 CARTON **10**

Dimensions (L x W x H)	490 x 150 x 3mm
Weight	0,30kg



LUCID 2.8
FILTER 25°

- Designed to bundle the light
- Excellent dimensional stability
- Material: acrylic and metal
- Light transmittance: >97%

150.218 CARTON **10**

Dimensions (L x W x H)	970 x 106 x 1.6mm
Weight	0,70kg











150.780 CARTON **4** PALLET **96**

DMX IP65

Light source	6-in-1 LED
LED colours	Red, Green, Blue, White, Amber, UV
LED power	12W
Quantity of LEDs	6
Beam / Field angle	19° / 43°
Illuminance	2.571 lx@1m
Flash rate per second	1 - 20Hz
DMX channels	6, 12
DMX connection	3-pin XLR, Wireless DMX
Wireless DMX protocol	Eazylink
IP rating	IP65
Cooling	Convection
Display	OLED
Power plug	P-Con TRI
Power consumption	0.4 - 0.2A
Battery	12.6V - 10.4Ah
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	170 x 230 x 210mm
Weight	3,80kg

WBP612IP
OUTDOOR BATTERY PAR RGBWA-UV

- RGBWA-UV colour mixing
- Built-in battery (up to 20 hours operating time, single colour)
- Control panel with OLED display
- Built-in wireless DMX receiver/transmitter (EazyLink)
- Rapid recharge time of 5 hours
- 16.7 million kinds of colour change
- Electronic dimming: 0-100%
- 6 or 12 DMX channels
- Master/Slave function
- Aluminium housing
- Double bracket also acts as floor stand
- Waterproof IP65 for outdoor use
- Waterproof connectors

FCBP6
FLIGHTCASE

- Designed to fit 6 pieces WBP612IP LED Par fixtures
- Charge up to 6 pieces uplights via the built-in sockets with protection
- Equipped with 2 butterfly
- 2 Castors with brakes and 2 castors without brakes
- Ballcorners and recessed handles



150.781 CARTON **1** PALLET **12**

Material thickness	9mm
Dimensions (L x W x H)	625 x 625 x 315mm
Weight	19,05kg







DMX IP65

	150.782	150.784
NAME	WBP912IP	WBP1212IP
CARTON	4	4
PALLET	80	80
Light source	6-in-1 LED	
LED colours	Red, Green, Blue, White, Amber, UV	
LED power	12W	
Quantity of LEDs	9	12
Beam / Field angle	19° / 43°	
Illuminance	5.136 lx@1m	8.523 lx@1m
Flash rate per second	1 - 20Hz	
DMX channels	6, 12	
DMX connection	3-pin XLR, Wireless DMX	
Wireless DMX protocol	Eazylink	
IP rating	IP65	
Cooling	Convection	
Display	OLED	
Power plug	P-Con TRI	
Power consumption	0.7 - 0.35A	0.5 - 0.25A
Battery	12.6V - 16Ah	
Power supply	100-240VAC 50/60Hz	
Dimensions	215 x 280 x 235mm	217 x 280 x 246mm
Weight	4,80kg	5,00kg

WBP SERIES
OUTDOOR BATTERY PARS

- RGBWA-UV colour mixing
- Built-in battery (up to 20 hours operating time, single colour)
- Control panel with OLED display
- Timer function
- Built-in wireless DMX receiver/transmitter (EazyLink)
- Rapid recharge time of 5 hours
- 16.7 million kinds of colour change
- Electronic dimming: 0-100%
- 6 or 12 DMX channels
- Master/Slave function
- Aluminum housing
- Double bracket also acts as floor stand
- Waterproof IP65 for outdoor use
- Waterproof connectors



FCBP12
FLIGHTCASE

- Designed to fit 6 pieces WBP912IP or WBP1212IP LED Par fixtures
- Charge up to 6 pieces uplights via the built-in sockets with protection
- Equipped with 2 butterfly
- 2 castors with brakes and 2 castors without brakes

150.785 CARTON **1** PALLET **7**

Material thickness	9mm
Dimensions (L x W x H)	760 x 700 x 350mmmm
Weight	24,00kg









IP65

150.758 CARTON **6** PALLET **108**

Light source	4-in-1 LED
LED colours	Red, Green, Blue, White
LED power	10W
Quantity of LEDs	7
Beam angle	18°
Field angle	30°
Illuminance	18.000 lx @ 1m
DMX channels	4, 8
DMX connection	3-pin XLR
Modes	Automatic programs, DMX, Master/Slave
IP rating	IP65
Power plug	Fixed power lead
Power consumption	0.7 - 0.3A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	170 x 225 x 205mm
Weight	3,30kg

BWA410
OUTDOOR LED PAR RGBW

- 7x 10W 4-in-1 LEDs
- RGBW colour mixing
- Different colour presets
- Pre programmed shows
- Electronic dimming: 0 - 100%
- 4 or 8 DMX channels
- DMX and Stand-alone mode
- Master/Slave function
- DMX in/output via 3-pin XLR
- Control panel with LED display
- Aluminum housing
- Double bracket also acts as floor stand
- Waterproof IP65 for outdoor use
- Waterproof connectors









BWA418
OUTDOOR LED PAR RGBW

- 18x 12W 4-in-1 LEDs
- RGBW colour mixing
- Different colour presets
- Pre programmed shows
- Electronic dimming: 0 - 100%
- 2, 3, 4, 5 or 9 DMX channels
- DMX and Stand-alone mode
- Master/Slave function
- Auto mode with adjustable speed
- DMX in/output via 3-pin XLR
- Control panel with LED display
- Aluminum housing
- Double bracket also acts as floor stand
- Waterproof IP65 for outdoor use
- Waterproof connectors
- IR remote control




IP65

150.760 CARTON **4** PALLET **48**

Light source	4-in-1 LED
LED colours	Red, Green, Blue, White
LED power	12W
Quantity of LEDs	18
Beam / Field angle	23° / 40°
Illuminance	13.000 lx @ 1m
Modes	Automatic programs, DMX
IP rating	IP65
Power plug	Fixed power lead
Power consumption	165W
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	265 x 280 x 220mm
Weight	5,50kg







BWA412
OUTDOOR LED PAR RGBWA-UV

- 12x 18W 6-in-1 LEDs
- RGBWA-UV colour mixing
- Different colour presets
- Pre programmed shows
- Electronic dimming: 0 - 100%
- 2, 3, 5, 6 or 11 DMX channels
- DMX and Stand-alone mode
- Master/Slave function
- Auto mode with adjustable speed
- DMX in/output via 3-pin XLR
- Control panel with LED display
- Aluminum housing
- Double bracket also acts as floor stand
- Waterproof IP65 for outdoor use
- Waterproof connectors
- IR remote control



IP65

150.763 CARTON **4** PALLET **64**

Light source	6-in-1 LED
LED colours	Red, Green, Blue, White, Amber, UV
LED power	18W
Quantity of LEDs	12
Beam / Field angle	20° / 41°
Illuminance	18.600 lx @ 1m
Modes	Automatic programs, DMX
IP rating	IP65
Power plug	Fixed power lead
Power consumption	170W
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	270 x 260 x 205mm
Weight	4,80kg







BWA536
OUTDOOR LED PAR RGBW

- 18x 12W 4-in-1 LEDs
- RGBW colour mixing
- 25x different colour presets
- Colour temperature 2700, 3200, 4300, 5600, 6500, 8000K
- 9x pre-programmed shows and adjustable speed
- Electronic dimming: 0 - 100%
- 3, 4, 5 or 10 DMX channels
- Strobe effect
- Selectable colour fade and flash
- DMX and Stand-alone mode
- Master/Slave function
- DMX in/output via 3-pin XLR
- Control panel with LED display (touch button)
- Display lock via password
- Aluminium housing
- Waterproof IP65 for outdoor use
- Waterproof connectors, Powerconnector TR (in-out)
- IR remote control



IP65

150.790 CARTON **4** PALLET **48**

Light source	18x 12W 4-in-1 LED
LED colours	Red, Green, Blue, White
Beam / Field angle	22° / 38°
Illuminance	12.000 lx @ 1m
Flash rate per second	1 - 20Hz
Modes	Automatic programs, DMX, Master/Slave
IP rating	IP65
Power plug	P-Con TRI
Power consumption	1.1 - 0.6A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	310 x 300 x 155mm
Weight	5,20kg







BWA534
OUTDOOR LED PAR RGBWA-UV

- 12x 15W 6-in-1 LEDs
- RGBWA-UV colour mixing
- 27x different colour presets
- Colour temperature 2700, 3200, 4300, 5600, 6500, 8000K
- 9x pre-programmed shows and adjustable speed
- Electronic dimming: 0 - 100%
- 3, 5, 6 or 12 DMX channels
- Strobe effect
- Selectable colour fade and flash
- DMX and Stand-alone mode
- Master/Slave function
- DMX in/output via 3-pin XLR
- Control panel with LED display (touch button)
- Display lock via password
- Aluminium housing
- Waterproof IP65 for outdoor use
- Waterproof connectors, Powerconnector TR (in-out)
- IR remote control




IP65

150.792 CARTON **4** PALLET **48**

Light source	12x 15W 6-in-1 LED
LED colours	Red, Green, Blue, White, Amber, UV
Beam / Field angle	22° / 41°
Illuminance	11.000 lx @ 1m
Flash rate per second	1 - 20Hz
Modes	Automatic programs, DMX, Master/Slave
IP rating	IP65
Power plug	P-Con TRI
Power consumption	1.0 - 0.5A
Power supply	110-250VAC 50/60Hz
Dimensions (L x W x H)	310 x 300 x 150mm
Weight	5,20kg







BWA532
OUTDOOR LED PAR RGBW

- 12x 12W 4-in-1 LEDs
- RGBW colour mixing
- 25x different colour presets
- Colour temperature 2700, 3200, 4300, 5600, 6500, 8000K
- 9x pre-programmed shows and adjustable speed
- Electronic dimming: 0 - 100%
- 3, 4, 5 or 10 DMX channels
- Strobe effect
- Selectable colour fade and flash
- DMX and Stand-alone mode
- Master/Slave function
- DMX in/output via 3-pin XLR
- Control panel with LED display (touch button)
- Display lock via password
- Aluminium housing
- Waterproof IP65 for outdoor use
- Waterproof connectors, Powerconnector TR (in-out)
- IR remote control



IP65

150.794 CARTON **4** PALLET **48**

Light source	12x 12W 4-in-1 LED
LED colours	Red, Green, Blue, White
Beam / Field angle	19° / 36°
Illuminance	17.000 lx @ 1m
Flash rate per second	1 - 20Hz
Modes	Automatic programs,
IP rating	DMX, Master/Slave
Power plug	IP65
Power-connector TR	P-Con TRI
Power consumption	1.15 - 0.56A
Power supply	110-250VAC 50/60Hz
Dimensions (L x W x H)	310 x 300 x 150mm
Weight	5,20kg







BWA530
OUTDOOR LED PAR RGBW

- 7x 10W 4-in-1 LEDs
- RGBW colour mixing
- 25x different colour presets
- Colour temperature 2700, 3200, 4300, 5600, 6500, 8000K
- 9x pre-programmed shows and adjustable speed
- Electronic dimming: 0 - 100%
- 3, 4, 5 or 10 DMX channels
- Strobe effect
- Selectable colour fade and flash
- DMX and Stand-alone mode
- Master/Slave function
- DMX in/output via 3-pin XLR
- Control panel with LED display (touch button)
- Display lock via password
- Aluminium housing
- Waterproof IP65 for outdoor use
- Waterproof connectors, Powerconnector TR (in-out)
- IR remote control




IP65

150.796 CARTON **4** PALLET **48**

Light source	7x 10W 4-in-1 LED
LED colours	Red, Green, Blue, White
Beam / Field angle	20° / 37°
Illuminance	11.500 lx @ 1m
Flash rate per second	1 - 20Hz
Modes	Automatic programs,
IP rating	DMX, Master/Slave
Power plug	IP65
Power-connector TR	Power-connector TR
Power consumption	0.93 - 0.43A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	270 x 180 x 250mm
Weight	4,05kg





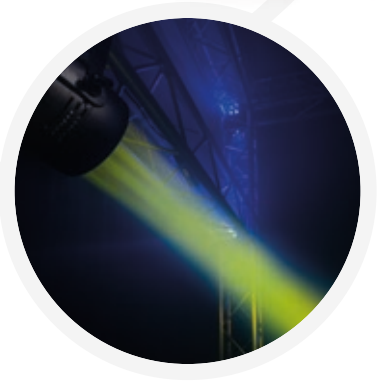



151.510 CARTON **4** PALLET **56**


Light source	4-in-1 LED
LED colours	Red, Green, Blue, White
LED power	15W
Quantity of LEDs	19
Beam angle	9° - 30°
Field angle	16° - 56°
Illuminance	67.000
Flash rate per second	0 - 20Hz
DMX channels	5, 10, 16, 32
DMX connector	3-pin XLR
Modes	Automatic programs, DMX, Master/Slave
IP rating	IP20
Power plug	Power-connector
Power consumption	1.6 - 0.8A
Power supply	220-240VAC 50Hz
Dimensions (L x W x H)	210 x 280 x 330mm
Weight	5,10kg

BAC55OZ
LED PRO PAR RGBW WITH ZOOM

- 19x 15W 4-in-1 LEDs
- RGBW colour mixing
- Motorized zoom
- Zoom range: 9° - 30°
- 3 separate controllable LED zones
- 5, 10, 16 or 32 DMX channels
- 0-100% electronic dimmer
- Lightweight aluminium housing
- Low noise and efficient cooling system
- DMX and Stand-alone mode
- Master/slave function
- DMX in/output via 3-pin XLR
- Pre-programmed shows
- Sound activated with adjustable sensitivity
- Auto mode with adjustable speed
- Control panel with LED display
- Powerconnector input/output
- Double bracket also acts as floor stand





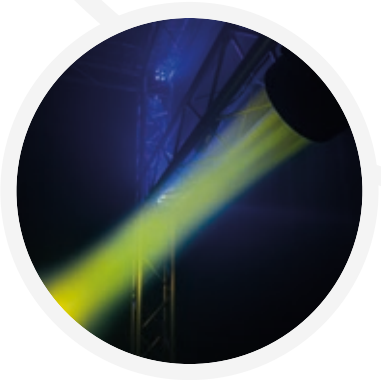



IP65

150.775 CARTON **2** PALLET **9**

Light source	4-in-1 LED
LED colours	Red, Green, Blue, White
LED power	15W
Quantity of LEDs	19
Beam angle	2° - 25°
Field angle	10° - 51°
Illuminance	88.808 lx @ 1m
Flash rate per second	1 - 20Hz
DMX channels	11, 22
DMX connection	3-pin XLR
Modes	Automatic programs, DMX, Manual, Master/Slave
IP rating	IP65
Cooling	Temperature controlled fan
Display	OLED
Power plug	P-Con TRI
Power consumption	2.63 - 1.28A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	370 x 296 x 218 mm
Weight	9,40kg

BWA55OZ
OUTDOOR LED PAR RGBW ZOOM

- 19x 15W 4-in-1 LEDs
- RGBW colour mixing
- Motorized zoom
- Zoom range: 2° - 25°
- IP65 weatherproof
- 3 separate controllable LED zones
- 0-100% electronic dimmer
- Lightweight aluminium housing
- Low noise level due to the efficient cooling system
- DMX and Stand-alone mode
- Master/slave function
- DMX in/output via 3-pin XLR
- RDM controllable
- 3 Auto programs with adjustable speed
- Control panel with touchscreen OLED display
- P-Con TR input/output
- Double bracket also acts as floor stand
- Including Omega bracket







151.329 CARTON **4** PALLET **96**

Light source	7-in-1 LED
LED colours	Red, Green, Blue, Amber, Cool White, Warm White, Ultra Violet
LED power	14W
Quantity of LEDs	7
Beam / Field angle	20° / 37°
Illuminance	7200 lx @ 1m
Flash rate per second	0 - 20Hz
DMX channels	3, 5, 7, 12
DMX connection	3-pin XLR
Modes	Auto programs, DMX, Master/Slave
IP rating	IP20
Power plug	Power-connector
Power consumption	0.6 - 0.3A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	175 x 235 x 90mm
Weight	2,40kg

BAC500
LED PRO PAR RGBA-UV/CW/WW

- 7x 14W 7-in-1 LEDs
- RGBA-UV-CW/WW colour mixing
- 3, 5, 7 or 12 DMX channels
- Lightweight aluminum housing
- DMX and Stand-alone mode
- 0-100% electronic dimmer
- Master/Slave function
- IR remote control
- DMX in/output via 3-pin
- Pre programmed shows
- Sound activated with adjustable sensitivity
- Auto mode with adjustable speed
- Control panel with LED display
- Powerconnector input/output









BAC508
LED PRO PAR RGBA-UV/CW/WW

- 12x 14W 7-in-1 LEDs
- RGBA-UV-CW/WW colour mixing
- 3, 5, 7 or 12 DMX channels
- Lightweight housing
- DMX and Stand-alone mode
- 0-100% electronic dimmer
- Master/Slave function
- IR remote control
- DMX in-/output via 3 or 5-pin
- Pre programmed shows
- Sound activated with adjustable sensitivity
- Auto mode with adjustable speed
- Control panel with LED display
- Powerconnector input/output



151.331 CARTON **4** PALLET **96**

Light source	7-in-1 LED
LED colours	Red, Green, Blue, Amber, Cool White, Warm White, Ultra Violet
LED power	14W
Quantity of LEDs	12
Beam / Field angle	25° / 46°
Illuminance	7984 lx @ 1m
Flash rate per second	0 - 20Hz
DMX channels	3, 5, 7, 12
DMX connection	3-pin XLR, 5-pin XLR
Modes	Auto programs, DMX, Master/Slave
IP rating	IP20
Power plug	Power-connector
Power consumption	0.67 - 0.28A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	215 x 280 x 105mm
Weight	3,20kg







BAC509
LED PRO PAR RGBA

- 12x 10W 4-in-1 LEDs
- RGBA colour mixing
- 3, 4, 5 or 9 DMX channels
- Lightweight housing
- DMX and Stand-alone mode
- 0-100% electronic dimmer
- Master/Slave function
- IR remote control
- DMX in-/output via 3 or 5-pin
- Pre programmed shows
- Sound activated with adjustable sensitivity
- Auto mode with adjustable speed
- Control panel with LED display
- Powerconnector input/output



151.332 CARTON **4** PALLET **72**

Light source	4-in-1 LED
LED colours	Red, Green, Blue, Amber
LED power	10W
Quantity of LEDs	12
Beam angle	18°
Field angle	36°
Illuminance	7.200 lx @ 1m
Flash rate per second	1 - 24Hz
DMX channels	3, 4, 5, 9
DMX connection	3-pin XLR, 5-pin XLR
Modes	Auto programs, DMX, Master/Slave
IP rating	IP20
Power plug	Power-connector
Power consumption	0.87 - 0.44A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	215 x 280 x 105mm
Weight	3,20kg



BAC32 SERIES
LED PRO PARS

- Aluminium lightweight PAR
- 4 or 9 DMX channels
- DMX and Stand-alone mode
- 0-100% electronic dimmer
- Master/Slave function
- DMX in/output via 3-pin XLR
- Pre programmed shows
- Sound activated with adjustable sensitivity
- Auto mode with adjustable speed
- Control panel with OLED display
- P-Con connector input/output
- IR remote control

	150.800	150.802	150.803	150.804
NAME	**BAC320**	**BAC322**	**BAC322W**	**BAC324**
COLOUR	**BLACK**	**BLACK**	**WHITE**	**BLACK**
CARTON	**10**	**10**	**10**	**10**
PALLET	**280**	**280**	**280**	**280**
Light source	4-in-1 LED	6-in-1 LED	6-in-1 LED	6-in-1 LED
LED colours	RGBW	RGBALC	RGBALC	RGBWA-UV
LED power	8W	10W	10W	10W
Quantity of LEDs	6			
Beam angle	20°			
Field angle	45°			
Flash rate per second	0 - 15Hz			
DMX channels	4, 9			
DMX connection	3-pin XLR			
Modes	Automatic programs, DMX			
IP rating	IP20			
Cooling	Convection			
Display	OLED			
Power plug	Power-connector			
Power supply	100-240VAC 50/60Hz			
Dimensions	130 x 130 x 100mm			
Weight	1,60kg			



BAC32F
FROST FILTER 40°

150.812 CARTON **10**

Dimensions (L x W x H)	165 x 165 x 8mm
Weight	0,05kg



BAC32B
BARNDOOR

150.813 CARTON **10**

Dimensions (L x W x H)	130 x 130 x 20mm
Weight	0,24kg





BAC33 SERIES
LED PRO PARS

- Aluminium lightweight PAR
- 4 or 9 DMX channels
- DMX and Stand-alone mode
- 0-100% electronic dimmer
- Master/Slave function
- DMX in/output via 3-pin XLR
- Pre programmed shows
- Sound activated with adjustable sensitivity
- Auto mode with adjustable speed
- Control panel with OLED display
- P-Con connector input/output
- IR remote control



	150.820	150.822	150.824
NAME	**BAC330**	**BAC332**	**BAC334**
CARTON	**8**	**8**	**8**
PALLET	**192**	**192**	**192**
Light source	4-in-1 LED	6-in-1 LED	6-in-1 LED
LED colours	RGBW	RGBALC	RGBWA-UV
LED power	8W	10W	10W
Quantity of LEDs		12	
Beam angle		20°	
Field angle		45°	
Flash rate per second		0 - 15Hz	
DMX channels		4, 9	
DMX connection		3-pin XLR	
Modes		Automatic programs, DMX	
IP rating		IP20	
Cooling		Convection	
Display		OLED	
Power plug		Power-connector	
Power supply		100-240VAC 50/60Hz	
Dimensions (L x W x H)		182 x 182 x 100mm	
Weight		1,80kg	



BAC33F
FROST FILTER 40°

150.832 CARTON **8**

Dimensions (L x W x H)	165 x 165 x 8mm
Weight	0,05kg



BAC33B
BARNDOOR

150.833 CARTON **8**

Dimensions (L x W x H)	180 x 180 x 20mm
Weight	0,48kg







COB150 SERIES
COB PRO PAR

- 150W COB LED
- CRI >98
- Beam angle 25° (or 60° with the extra diffuser filter)
- DMX and Stand-alone mode
- Master/slave function
- Auto mode
- 4 pre-programmed shows
- DMX in/output via 3-pin XLR
- Powerconnector input/output
- Control panel with LED display
- Double bracket also acts as floor stand
- IR remote control



	150.612	150.613
NAME	**COB150WW**	**COB150RGBW**
CARTON	**4**	**4**
PALLET	**32**	**32**
Light source	Single colour LED	4-in-1 LED
LED colours	Warm White	Red, Green, Blue, White
LED power	150W	
Color Rendering Index (CRI)	>98	
Colour temperature	3000K	1800K - 8000K
Beam angle	25° (60° with diffuser)	
Field angle	50°	
Illuminance	11.182 lx @ 1m	11.013 lx @ 1m
Flash rate per second	0 - 20Hz	
DMX channels	1, 2, 4	3, 4, 5, 10
DMX connection	3-pin XLR	
Modes	Automatic programs, DMX, Manual, Master/Slave	
IP rating	IP20	
Cooling	Convection	
Display	LCD	
Power plug	P-Con	
Power consumption	2.09 - 1.15A	
Power supply	100-240VAC 50/60Hz	
Dimensions (L x W x H)	220 x 190 x 190mm (220 x 350 x 190 with bracket)	
Weight	3,85kg	









BPL410
BATTERY MAST LIGHT

- Battery powered mast light
- 4x 10W warm white LEDs
- Manual zoom: 45-90°
- Adjustable lighting angle
- Sturdy base with extra weight
- High capacity Li-ion battery pack
- Battery life: up to 20 hours
- Battery charging time: 6 hours (full power)
- Built-in wireless DMX receiver (for EazyLink)
- Controllable Wi-Fi (LED LAMP app)
- DMX in/output via 3-pin XLR
- P-Con in/output
- Quick assembly/disassembly without tools
- Including remote control

DMX

156.100 CARTON **1** PALLET **10**

Colour temperature	2700K
Light source	Single colour LED
Colours	Warm White
LED power	10W
Quantity of LEDs	4
Beam angle: Min	45°
Beam angle: Max	90°
Flash rate per second	1 - 17Hz
DMX channels	4, 8
DMX connection	3-pin XLR, Wireless DMX
Modes	DMX, Manual, Master/Slave
IP rating	IP20
Cooling	Convection
Display	LCD
Power plug	P-Con
Power consumption	0.536 - 0.274A
Battery	11.1V - 25Ah
Power supply	100-240VAC 50/60Hz (12V Adapter)
Dimensions (L x W x H)	236O x 250 x 300mm
Weight	10,60kg



FC410
FLIGHTCASE

- Designed to fit 2 pieces of BPL410 battery mast lights
- 2 separated compartments inside
- Butterfly locks and aluminium profiles all around
- Ball corners and recessed handles
- Provided with tailor-made solid foam on the inside



156.101 CARTON **1** PALLET **15**

Dimensions (L x W x H)	1200 x 600 x 380mm
Weight	15,00kg

RGBW

WARM WHITE





BTS SERIES
GOBO HOLDER D-SIZE

- For BTS lens tubes
- Diameter gobo outside 53.3mm (OD)
- Diameter image area 40mm (IA)

151.360 CARTON **20**



BTS SERIES
IRIS

- For BTS lens tubes
- With adjustable diaphragm

151.361 CARTON **20**

BTS SERIES
LED PROFILE SPOTS WITH ZOOM

- Lifetime LED: 50.000 hours
- 18° to 36° manual zoom
- Compact and lightweight ABS body
- HQ optical system, beam with clean shutter cuts
- 16 bit dimming via DMX
- Flicker free
- Control panel: full colour LCD display
- DMX (3-pin) and manual control options
- Gobo slot
- Intelligent temperature control for silent operation
- Powerconnector in/out
- Including power cable, safety cord and colour frame



151.370 + 151.372



151.374

	151.370	151.372	151.374
NAME	**BTS200**	**BTS250C**	**BTS300Z**
CARTON	**1**	**1**	**1**
PALLET	**15**	**15**	**15**
Light source	1x 200W Single colour LED	1x 250W 4-in-1 LED	1x 300W Single colour LED
LED colours	Warm White	Red, Green, Blue, White	Warm White
Colour temperature	3200K	2800K - 8000K	3200K
Beam angle		18° - 36°	
Illuminance	68.443 lx (zoom in)	61.077 lx (zoom in)	93.538 lx (zoom in)
Flash rate per second	1 - 19Hz	1 - 19Hz	1 - 15Hz
DMX channels	1, 2, 3	1, 4, 6, 10	1, 2, 3
DMX connection	3-pin XLR	3-pin XLR	3-pin XLR, 5-pin XLR
Modes		DMX, Manual	
IP rating		IP20	
Power plug		P-Con	
Power consumption	1.64 - 0.81A	2.2 - 1.1A	2.5 - 1.5A
Power supply		100-240VAC 50/60Hz	
Dimensions (L x W x H)		745 x 294 x 294mm	
Weight	8,80kg	9,10kg	9,20kg

beamZ Pro

WARM WHITE





151.387 CARTON **2** PALLET **12**

Light source	Single colour LED
Colour temperature	3200K
LED colours	Warm White
LED power	200W
Quantity of LEDs	1
Illuminance	135.293 lx @ 1m
Flash rate per second	1 - 11Hz
DMX channels	2
DMX connection	3-pin XLR, 5-pin XLR
Modes	DMX, Manual
IP rating	IP20
Cooling	Temperature controlled fan
Display	LCD
Power plug	P-Con
Power consumption	2.53 - 1.42A
Power supply	100-240VAC 50/60HZ
Dimensions (L x W x H)	640 x 260 x 275 mm
Weight	8,65kg

BTSE200
LED PROFILE SPOT ENGINE

- Profile LED Engine Warm White
- 200W WW COB LED
- Colour temperature: 3200K
- Colour rendering index: CRI 95%
- Dimming: 0-100% linear dimming
- Flicker free
- Control Panel: LCD display
- DMX (3/5-pin) or manual control
- Iris and Gobo holder slot
- Intelligent temperature control for silent operation
- P-Con In-Out connections for linking multiple units
- Housing Materials: Aluminium and ABS
- Lens tubes available separately (19°, 26° and 36°)



BTSL SERIES
LENS TUBE

- For BTSE200 LED Profile Spot Engine
- Housing: Aluminium

	151.389	151.391	151.393
NAME	**BTSL19**	**BTSL26**	**BTSL36**
CARTON	**1**	**1**	**1**
Angle	19°	26°	36°



BTSL-I
IRIS

- For BTSE LED Profile Spot Engine
- With adjustable diaphragm

151.394 CARTON **20**



BTSL-GH
GOBO HOLDER D-SIZE

- For BTSE LED Profile Spot Engine
- Diameter Gobo outside 95mm (OD)
- Diameter image area 70mm (IA)

151.396 CARTON **20**

WARM WHITE





151.378



151.381



BTF SERIES
LED FRESNELS WITH ZOOM WW

- Lifetime LED: 50.000 hours
- Motorized zoom
- Compact and lightweight aluminium body
- HQ optical system
- 16 bit dimming via DMX
- Flicker free with selectable PWM
- Control panel with LED display
- DMX and manual control options
- Intelligent temperature control for silent operation
- Powerconnector in/out
- Including powercable, barndoor, safety cord and colour frame

	151.378	151.381
NAME	**BTF200Z**	**BTF300Z**
CARTON	**1**	**1**
PALLET	**22**	**20**
Light source	1x 200W Single colour LED	1x 300W Single colour LED
LED colours	Warm White	
Colour temperature	3200K	
Colour rendering index	97	98
Beam angle: Min / Max	15° / 60°	8° / 47°
Illuminance	45.750 lx @ 1m	136.852 lx @ 1m
Flash rate per second	1 - 19Hz	1 - 20Hz
DMX channels	2, 3, 4, 5	1, 2, 3, 4
DMX connection	3-pin XLR, 5-pin XLR	
Modes	DMX, Manual	
IP rating	IP20	
Cooling	Temperature controlled fan	
Power plug	P-Con	
Power consumption	1.5 - 0.8A	2.32 - 1.10A
Power supply	100-240VAC 50/60Hz	
Dimensions (L x W x H)	315 x 296 x 330mm	428 x 266 x 451mm
Weight	9,00kg	9,20kg

RGBW

WARM WHITE



151.376



151.380





	151.376	151.380
NAME	**BTF100Z**	**BTF200CZ**
CARTON	**1**	**1**
PALLET	**30**	**22**
Light source	1x 100W Single colour LED	1x 200W 4-in-1 LED
LED colours	Warm White	Red, Green, Blue, White
Colour temperature	3200K	3000K - 8000K
Colour rendering index	97	
Motorized zoom	25° / 65°	18° / 60°
Illuminance	34.300 lx @ 1m	23.000 lx @ 1m
Flash rate per second	1 - 19Hz	
DMX channels	2, 3, 4, 5	3, 4, 5, 6, 12
DMX connection	3-pin XLR	3-pin XLR, 5-pin XLR
Modes	DMX, Manual	
IP rating	IP20	
Cooling	Temperature controlled fan	
Power plug	P-Con	
Power consumption	1.18 - 0.55A	1.35 - 0.68A
Power supply	100-240VAC 50/60Hz	
Dimensions (L x W x H)	330 x 210 x 245mm	315 x 296 x 330mm
Weight	7,10kg	9,00kg

BTF SERIES
LED FRESNELS WITH ZOOM

- Lifetime LED: 50.000 hours
- Motorized zoom
- Compact and lightweight aluminium body
- HQ optical system
- 16 bit dimming via DMX
- Flicker free with selectable PWM
- Control panel with LED display
- DMX and manual control options
- Intelligent temperature control for silent operation
- Powerconnector in/out
- Including powercable, barndoor, safety cord and colour frame

CW/
WW







	155.102	155.108
NAME	**BTK100C**	**BTK200C**
CARTON	**2**	**2**
PALLET	**24**	**24**
Light source	Single colour LED	
Colour temperature	2800K - 6000K	
LED colours	Cool White, Warm White	
Beam angle: Min / Max	15° / 40°	
Illuminance	43.854 lx @ 1m	55.013 lx @ 1m
Flash rate per second	1 - 12Hz	1 - 14Hz
DMX channels	2, 6	
DMX connection	3-pin XLR	
Modes	DMX, Manual	
IP rating	IP20	
Cooling	Temperature controlled fan	
Display	LCD	
Power plug	Power-connector	
Power consumption	0.581A	0.681A
Power supply	100-240VAC 50/60Hz	
Dimensions (L x W x H)	355 x 390 x 210 mm	355 x 395 x 210 mm
Weight	4,95kg	6,35kg

BTK SERIES
LED FRESNELS WITH ZOOM

- Cool White/Warm White COB LED
- Colour temperature: between 2800K and 6000K
- Lifetime LED: 50.000 hours
- Manual zoom
- Compact and lightweight aluminium body
- HQ optical system
- CRI >95 (Colour Rendering Index)
- Dimming: 0 - 100% (2 manual dimmers)
- Flicker free
- Control panel with LED display
- DMX 3-pin or manual control options
- Intelligent temperature control for silent operation
- P-Con in/out
- Including power cable and barndoor

WARM WHITE







155.105 CARTON **2** PALLET **36**

Light source	Single colour LED
Colour temperature	3000K
LED colours	Warm White
Beam angle: Min	15°
Beam angle: Max	46°
Illuminance	93.261 lx @ 1m
Flash rate per second	1 - 19Hz
DMX channels	2, 3, 4
DMX connection	3-pin XLR, 5-pin XLR
Modes	DMX
Cooling	Temperature controlled fan
Display	LCD
Power plug	P-Con
Power consumption	2.5O - 1.4O6A
Power supply	1OO-24OVAC 5O/6OHz
Dimensions (L x W x H)	4OO x 255 x 25Omm
Weight	6,3Okg

BTK200W
LED FRESNEL WITH ZOOM

- 200W Warm White COB LED
- Colour temperature: 3000K
- Lifetime LED: 50.000 hours
- Manual zoom
- Compact and lightweight aluminium body
- HQ optical system
- CRI 97 (Colour Rendering Index) TLCI up to 98
- Flicker free
- Control panel with LED display
- DMX 3/5-pin or manual control options
- Intelligent temperature control for silent operation
- Powerconnector in/out
- Including power cable and barndoor

CW/
WW





155.095



155.096

BTK05OZ
MINI FRESNELS WITH ZOOM

- 50W Cool White + 50W Warm White COB LED
- Colour temperature: 2700K - 6500K
- Replaces 300-500W halogen lamps
- 10° to 60° manual zoom
- Compact and lightweight body
- HQ optical system
- CRI 92 (Colour Rendering Index) TLCI 98(3200K), TLCI 96(5600k)
- 16 bit dimming via DMX
- Flicker free
- Control panel with OLED display
- DMX and manual control options
- Intelligent temperature control for silent operation
- P-Con Powerconnector input
- Including barndoor


AVAILABLE OPTIONS		CARTON	PALLET
155.095	FRESNEL **3-PIN XLR**	**6**	**180**
155.096	FRESNEL **5-PIN XLR**	**6**	**180**
155.097	FLIGHTCASE FOR 8 PIECES	**1**	**10**

Light source	Single colour LED
Colour temperature	2700K - 6500K
Colours	Cool White, Warm White
LED power	50W
Quantity of LEDs	1
Beam angle: Min	10°
Beam angle: Max	60°
Illuminance	18.668 lx @ 1m
Flash rate per second	1 - 13Hz
DMX channels	2, 3
DMX connection	3-pin XLR or 5-pin XLR
Modes	DMX, Manual
IP rating	IP20
Cooling	Convection
Display	OLED
Power plug	P-Con
Power consumption	0.722 - 0.359A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	230 x 160 x 210mm
Weight	1,55kg

CW/ WW

RGBW





151.382



151.383



BTF SERIES
LED MINI FRESNELS WITH ZOOM

- Lifetime LED: 50.000 hours
- Replaces 300-500W halogen lamps
- Manual zoom
- Compact and lightweight aluminium body
- HQ optical system
- CRI ≥90 (Colour Rendering Index)
- 16 bit dimming via DMX
- Flicker free
- Control panel with LED display
- DMX (3-pin) and manual control options
- Intelligent temperature control for silent operation
- Powerconnector in
- Including power cable, barndoor, safety cord and colour frame

	151.382	151.383
NAME	**BTF50Z**	**BTF440Z**
CARTON	**4**	**4**
PALLET	**80**	**80**
Light source	2-in-1 LED	4-in-1 LED
LED colours	Cool White, Warm White	Red, Green, Blue, White
LED power	2x 50W	4x 40W
Colour temperature	2700K - 6500K	3000K - 8000K
Manual zoom	25° / 90°	25° / 80°
Illuminance	7.230 lx @ 1m	6.697 lx @ 1m
Flash rate per second	1 - 19Hz	
DMX channels	1, 2, 3, 5	3, 4, 5, 6, 11
DMX connection	3-pin XLR	
Modes	DMX	DMX, Manual
IP rating	IP20	
Power plug	P-Con	
Power consumption	0.7 - 0.3A	
Power supply	100-240VAC 50/60Hz	
Dimensions (L x W x H)	280 x 170 x 175mm	
Weight	2,20kg	









IP65

NUKE1
OUTDOOR MOTORIZED STROBE/BEAM

- Hybrid strobe/beam with motorized 180° tilt range
- 96x 10W Cool White LEDs controlled in 12 sections
- 14x 40W RGBW High Power LEDs controlled in 14 sections
- Pixel-mappable zones
- RGBW + Cool White colour mixing
- DMX512, stand alone and Master/slave Mode
- 4 Different DMX channel modes
- DMX (RDM) and ArtNet control capability
- Automatic programs and pre-programmed shows
- Adjustable speed
- Control panel with LCD display and key lock
- Waterproof IP65 for outdoor use
- Dimming: 0 - 100% 16 bit dimming
- Various dimmer curves adjustable
- Powerconnector P-Con TRI input
- Omega bracket included

153.295 CARTON **1** PALLET **18**

Strobe power	96x 10W
Strobe colour	Cool White
Strobe sections	12
Beam power	14x 40W
Beam colours	Red, Green, Blue, White
Beam sections	14
Beam angle	Beam 110°, Pixel 6°
Illuminance	97.675 lx @ 1m (Strobe 115.940 lx @ 0,5m)
IP rating	IP65
DMX channels	14, 25, 78, 94
DMX connection	ART-Net, 3-pin XLR, 5-pin XLR, RJ45
Flash rate per second	1 - 31Hz
Head movement: Tilt	180°
Power consumption	6.38 - 3.03A
Power supply	100-240VAC 50/60HZ
Dimensions (L x W x H)	420 x 225 x 403mm
Weight	22,35kg

FLCNKO2
FLIGHTCASE

- Designed to fit 2 pieces NUKE1 (153.295) or NUKE2 (153.296)
- Butterfly locks and aluminium profiles all around
- Ballcorners and recessed handles
- Hinges to hold the top cover open
- Provided with tailor-made solid foam on the inside

153.298 CARTON **1** PALLET **8**

Dimensions (L x W x H)	660 x 475 x 460mm
Weight	24,00kg











NUKE2
OUTDOOR MOTORIZED STROBE/WASH

- Hybrid strobe/wash with motorized 180° tilt range
- 96x 10W Cool White LEDs controlled in 12 sections
- 864x 0.5W RGB SMD LEDs controlled in 96 sections
- Pixel-mappable zones
- RGB + Cool White colour mixing
- DMX512, stand alone and Master/slave Mode
- 6 Different DMX channel modes
- DMX (RDM) and ArtNet control capability
- Automatic programs and pre-programmed shows
- Adjustable speed
- Control panel with LCD display and key lock
- Waterproof IP65 for outdoor use
- Dimming: 0 - 100% 16 bit dimming
- Various dimmer curves adjustable
- Powerconnector P-Con TRI input
- Omega bracket included

IP65

153.296 CARTON **1** PALLET **18**

Strobe power	96x 10W
Strobe colour	Cool White
Strobe sections	12
Wash power	864x 0.5W SMD
Wash colours	Red, Green, Blue
Wash sections	96
Beam angle	Beam 11°, Pixel 12°
Illuminance	6.334 lx @ 0,5m (Strobe 116.837 lx @ 0,5m)
IP rating	IP65
DMX channels	13, 23, 84, 132, 310, 324
DMX connection	ART-Net, 3-pin XLR, 5-pin XLR, RJ45
Flash rate per second	1 - 31Hz
Head movement: Tilt	180°
Power consumption	6.42 - 3.04A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	420 x 173 x 393mm
Weight	22,30kg

FLCNLO4
FLIGHTCASE

- Designed to fit 4 pieces NUKE1 (153.295) or NUKE2 (153.296)
- Butterfly locks and aluminium profiles all around
- Ballcorners and recessed handles
- Hinges to hold the top cover open
- Provided with tailor-made solid foam on the inside

153.299 CARTON **1** PALLET **2**

Dimensions (L x W x H)	1170 x 470 x 460mm
Weight	21,30kg



153.300





153.301



IP65

BS1500 SERIES
STROBOSCOPES

- Stroboscope, Blinder and Floodlight fixture
- 1320x SMD LEDs
- IP65 rated waterproof design
- Controllable in 6 segments
- DMX512, stand alone and Master/slave Mode
- Automatic programs and Pre-programmed shows
- Control panel with LCD display
- Fan cooled die-cast aluminium housing
- Various dimmer curves adjustable
- Waterproof DMX connectors
- Power connector True in
- Installation via quick-lock Omega bracket (included)

	153.300	153.301
NAME	**BS1500**	**BS1500W**
CARTON	**1**	**1**
PALLET	**24**	**24**
Light source	4-in-1 LED	Single colour LED
LED colours	Red, Green, Blue, White	Cool White
Quantity of LEDs	1320	
Beam / Field angle	67° x 33° / 112° x 109°	
IP rating	IP65	
DMX channels	4, 5, 7, 13, 15, 31	4, 12, 16
DMX connection	3-pin XLR	
Flash rate per second	1 - 18Hz	
Modes	Auto programs, DMX, Master/Slave	
Power consumption	6.4 - 3.05A	
Power supply	100-240VAC 50/60Hz	
Dimensions (L x W x H)	490 x 170 x 290mm	
Weight	12,65kg	





IP65

153.305 CARTON **2** PALLET **112**

Light source	Single colour LED, 3-in-1 LED
LED colours	Red, Green, Blue, Cool White
LED power	0.5W
Quantity of LEDs	768
LED power: Strobe	3W
Quantity of strobe LEDs	128
Beam / Field angle	54° x 65° / 115° x 116°
Illuminance	7.495 lx @ 1m
IP rating	IP65
DMX channels	4, 17, 129
DMX connection	3-pin XLR
Flash rate per second	1 - 20Hz
Display	LCD
Modes	Automatic programs, DMX, Manual
Power consumption	3.15O - 1.459A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	460 x 185 x 260mm
Weight	7,05kg

BS1100IP
OUTDOOR LED STROBOSCOPE

- Stroboscope, Blinder and Effect fixture
- 768x RGB SMD LEDs
- 128x Cool White SMD LEDs
- RGB + Cool White colour mixing
- DMX512, stand alone and Master/slave Mode
- Automatic programs with adjustable speed
- Convection cooled aluminium housing
- Various dimmer curves adjustable
- Control panel with LCD display
- IP65 classification for indoor and outdoor use
- Power connector in/output
- Quick lock omega clamp included





153.304 CARTON **1** PALLET **36**

Light source	Single colour LED
LED colours	Cool White
Quantity of LEDs	936
LED power: Strobe	0.5W
Beam / Field angle	69° x 68° / 114° x 111°
DMX channels	1, 2, 3, 6, 10
DMX connector	3-pin XLR
Flash rate per second	1 - 18Hz
Modes	Auto programs, DMX, Master/Slave
Power consumption	3.8 - 1.79A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	500 x 260 x 130mm
Weight	5,85kg

BS1000
STROBOSCOPE COOL WHITE

- Stroboscope and Blinder fixture
- 936x SMD LEDs
- Colour: Cool white
- Controllable in 4 segments
- DMX512, stand alone and Master/slave Mode
- Automatic programs
- Pre-programmed shows
- Control panel with LCD display
- Fan cooled metal/ABS housing
- Various dimmer curves adjustable
- Power connector in/output







PHANTOM 10000B
PURE DIODE LASER IN FLIGHTCASE

- Red (2700mW), Green (2700mW) and Blue (4600mW) Powerful laser
- Guaranteed 10W output
- Analog RGB colour modulation
- 30K @ 8° high speed optical scanner system
- X- and Y-Size inverter
- DMX and Stand-alone mode
- Master/slave function
- DMX in/output via 3-pin XLR
- ILDA in/output
- Interlock
- Powerconnector in/output
- Including solid waterproof PP flightcase

152.493 CARTON **1** PALLET **28**

Laser Red	2.700mW @ 638nm
Laser Green	2.700mW @ 525nm
Laser Blue	4.600mW @ 455nm
Scanner system	30kpps @ 8°
Maximum scanner angle	60 degrees
Guaranteed output	10.000mW
DMX channels	12, 23
DMX connection	3-pin XLR
ILDA	DB25
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	340 x 247 x 148mm
Weight	12,00kg





PHANTOM 2000
PURE DIODE LASER

- Red (500mW), Green (500mW) and Blue (1000mW) Powerful laser
- Guaranteed 2W output
- Analog RGB colour modulation
- 30K @ 8° high speed optical scanner system
- X- and Y-Size inverter
- DMX and Stand-alone mode
- Master/slave function
- Pre-programmed shows
- DMX in/output via 3-pin XLR
- Ilda in/output
- Interlock
- Powerconnector in/output

152.510 CARTON **2** PALLET **48**

Laser Red	500mW @ 638nm
Laser Green	500mW @ 520nm
Laser Blue	1000mW @ 455nm
Scanner system	30kpps @ 8°
Maximum scanner angle	60 degrees
Guaranteed output	2W
DMX channels	12, 23
DMX connection	3-pin XLR
ILDA	DB25
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	238 x 192 x 114mm
Weight	4,20kg



ILDA SERIES
ILDA LASER CABLE

- ILDA quality laser cable with DB25 connector Male/Female

	152.952	152.953	152.954
NAME	ILDA5	ILDA10	ILDA20
CARTON	50	50	20
Length	5m	10m	20m
Weight	0,40kg	0,65kg	1,30kg



LKS
LASER EMERGENCY KILL SWITCH

- Switch off laser units immediately and shutdown the light show

152.957 CARTON **50**

Dimensions	78 x 72 x 90mm
Weight	0,20kg




LKSC
LASER EMERGENCY KILL SWITCH WITH CABLE

- Quality kill switch
- Supplied with 20m cable

152.958 CARTON **8**

Dimensions	78 x 72 x 90mm
Weight	1,15kg

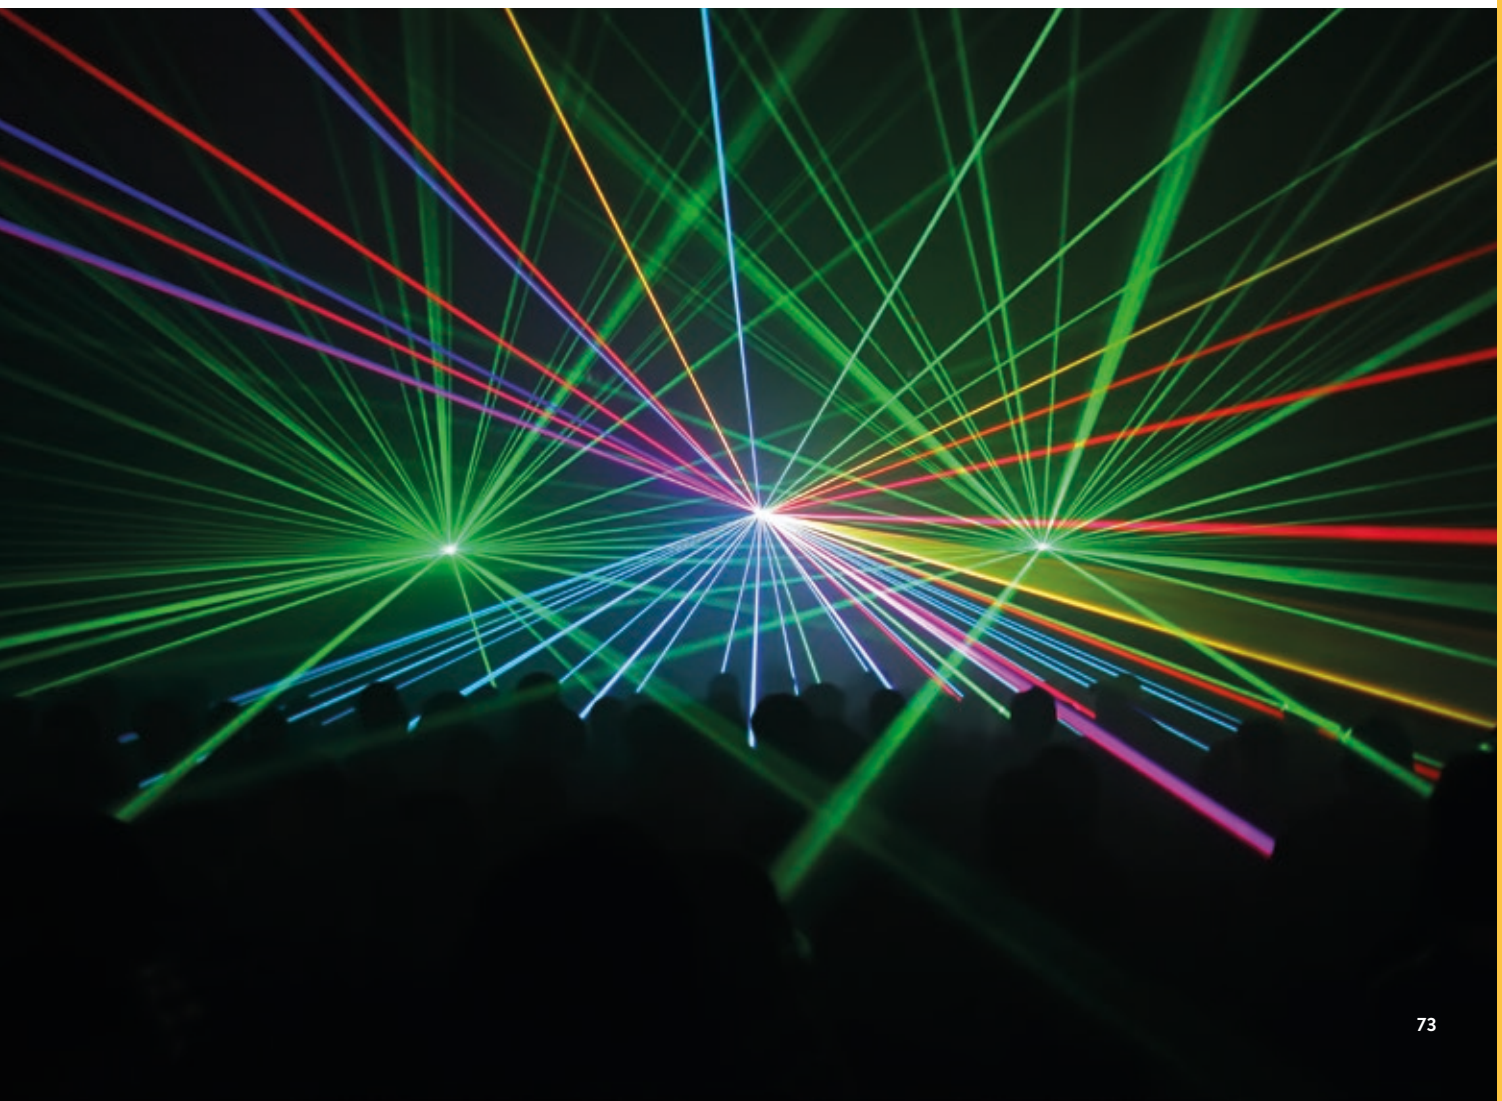



WD1M
EAZYLINK 3-PIN TX DONGLE

· Wireless DMX transmitter with built-in battery

154.120 CARTON **24**

DMX connection	3-pin XLR, Wireless DMX
Wireless DMX protocol	Eazylink
Power supply	3.7V (18650 Li-ion)
Dimensions (L x W x H)	85 x 28 x 28mm
Weight	0,07kg



WD1F
EAZYLINK 3-PIN TX DONGLE

· Wireless DMX receiver with built-in battery

154.121 CARTON **24**

DMX connection	3-pin XLR, Wireless DMX
Wireless DMX protocol	Eazylink
Power supply	3.7V (18650 Li-ion)
Dimensions (L x W x H)	85 x 28 x 28mm
Weight	0,07kg



WD1M-5
EAZYLINK 5-PIN TX DONGLE

· Wireless DMX transmitter with built-in battery

154.123 CARTON **24**

DMX connection	5-pin XLR, Wireless DMX
Wireless DMX protocol	Eazylink
Power supply	3.7V (18650 Li-ion)
Dimensions (L x W x H)	85 x 28 x 28mm
Weight	0,07kg



WD1F-5
EAZYLINK 5-PIN TX DONGLE

· Wireless DMX receiver with built-in battery

154.124 CARTON **24**

DMX connection	5-pin XLR, Wireless DMX
Wireless DMX protocol	Eazylink
Power supply	3.7V (18650 Li-ion)
Dimensions (L x W x H)	85 x 28 x 28mm
Weight	0,07kg



WCS1
EAZYLINK CHARGING STATION

· EazyLink charging station
· Charges up to 8 WD1 dongles simultaneously
· Direct charging, no cables needed
· With additional USB port to charge additional device

154.122 CARTON **6**

Power supply	100-240VAC 50/60Hz (5V USB)
Dimensions (L x W x H)	160 x 87 x 35mm
Weight	0,16kg

STICK-GU2
DMX WALL MOUNT INTERFACE

- Standalone wall mounted DMX controller
- Glass design panel with 3 touch-sensitive buttons (86x86mm)
- 128 DMX output channels
- 24 scenes
- 2K standalone memory
- Works with Easy Stand Alone software: ESA (PC) and ESA2 (PC/MAC) versions
- The STICK-GU2 cannot be controlled through ETHERNET and WIFI network
- Delivered with a micro USB cable



154.106 CARTON **20**

DMX connection	PCB Terminal Block
Power supply	5V via USB
Dimensions (L x W x H)	85 x 85 x 11mm
Weight	0,20kg

STICK-CW4
WIFI DMX WALL MOUNT INTERFACE

- State of the art glass design panel which sits 11mm from the wall (touch sensitive)
- Compatible with any DMX fixture or DMX LED driver
- Colour palette (can also be used for scene selection)
- Built-in flash memory for storing programs
- Up to 36 dynamic or static scenes
- 1024 DMX channels. Control 340 RGB fixtures
- USB connectivity for programming and control
- Controllable with ESA2 BeamZ Edition (Full mode) software and Arcolis, Lightpad and Easy Remote Pro software (Android/IPad)



154.108 CARTON **20**

DMX connection	RJ45, PCB Terminal Block
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	106 x 146 x 11mm
Weight	0,20kg

WTR10
HYBRID WIRELESS DMX TRANSCEIVER

- Compact wireless DMX transmitter and receiver
- Compatible with WDMX and EazyLink protocol
- 32 bit ARM high speed processor
- Operating frequency 2.4GHz
- FHSS (1800 hops/s) for stable connection
- Sturdy aluminium housing
- Build in power supply (P-Con)



DMX connection	3-pin or 5-pin XLR
Wireless DMX protocol	Eazylink, WDMX
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	127 x 75 x 35mm
Weight	0,30kg

AVAILABLE OPTIONS		CARTON
154.126	DMX TRANSCEIVER **3-PIN XLR**	**6**
154.129	DMX TRANSCEIVER **5-PIN XLR**	**6**





LF1400
LOW FOG MACHINE

- Compact low fog machine
- Works on water and standard smoke fluid
- Ultrasonic agitator converts distilled water into a thin mist
- Continuous output after initial warmup time
- Adjustable output and fan speed
- Control via on board digital display or DMX
- Sturdy metal housing with wheels
- DMX in/output via 3-pin XLR
- Smoke liquid tank capacity : 1.2 liter

160.745 CARTON **1** PALLET **16**

Heating element	1400W
Heat-up time	8 minutes
Output volume per minute	200m³
Tank capacity	3.8L
Modes	Automatic programs, DMX, Manual
DMX channels	2
DMX connection	3-pin XLR
Power consumption	7.25A
Power supply	220-240VAC 50Hz
Dimensions (L x W x H)	520 x 280 x 315mm
Weight	12,50kg





LF1500
LOW FOG MACHINE

- Compact low fog machine
- Works on water and standard smoke fluid
- Ultrasonic agitator converts distilled water into a thin mist
- Continuous output after initial warmup time
- Adjustable output and fan speed
- Control via on board digital display or DMX
- Solid flightcase with wheels
- DMX in/output via 3-pin XLR

160.748 CARTON **1** PALLET **10**

Heat-up time	8 minutes
Output volume per minute	300m³
Tank capacity	5L
Modes	Automatic programs, DMX
DMX channels	2
DMX connection	3-pin XLR
Power supply	220-240VAC 50Hz
Dimensions (L x W x H)	630 x 350 x 480mm
Weight	25,60kg



160.750 CARTON **1** PALLET **8**

Heat-up time	8 minutes
Output volume per minute	600m³
Tank capacity	5L
Modes	Automatic programs, DMX
DMX channels	2
DMX connection	3-pin XLR
Power supply	220-240VAC 50Hz
Dimensions (L x W x H)	700 x 440 x 560mm
Weight	38,60kg

LF3000
LOW FOG MACHINE

- Compact low fog machine
- Works on water and standard smoke fluid
- Ultrasonic agitator converts distilled water into a thin mist
- Continuous output after initial warmup time
- Adjustable output and fan speed
- Control via on board digital display or DMX
- Solid flightcase with wheels
- DMX in/output via 3-pin XLR



LF6000
LOW FOG MACHINE

- Professional low fog machine
- Works on water and standard smoke fluid
- Ultrasonic agitator converts distilled water into a thin mist
- Continuous output after initial warmup time
- Adjustable output and fan speed
- Control via on board digital display or DMX
- Solid flightcase with wheels
- DMX in/output via 3-pin XLR

160.753 CARTON **1** PALLET **4**

Heat-up time	8 minutes
Output volume per minute	1200m³
Tank capacity	10L
Modes	Automatic programs, DMX
DMX channels	2
DMX connection	3-pin XLR
Power consumption	13A
Power supply	220-240VAC 50Hz
Dimensions (L x W x H)	800 x 645 x 600mm
Weight	58,30kg





HZ3000
PRO HAZE MACHINE OIL BASED

- Continuous output, no warm-up time necessary
- Uses oil based liquid only
- Fluid consumption rate: 16 hours of continuous work (per liter)
- Air pressure: 101 psi
- Adjustable output and fan speed
- DMX and Stand-alone mode
- Solid flightcase with wheels
- DMX in/output via 3-pin XLR
- Note: only works with (oil based) hazer fluid

160.770 CARTON **1** PALLET **12**

Output volume per minute	85m³
Tank capacity	1,5L
Modes	Automatic programs, DMX
DMX channels	2
DMX connection	3-pin XLR
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	490 x 370 x 460mm
Weight	26,00kg



JFC1000
JET FOAM CANNON

- Constant use creates a foam layer that gradually dissolves and leaves practically no residue
- 50L liquid 2 min 38 sec to empty bin (1.5L concentrate with 48,5L water)
- Horizontal and vertical use
- Including solid flightcase

160.775 CARTON **1** PALLET **1**

Output volume per minute	40m³
Tank capacity	50L
Modes	Manual
Power consumption	13.6 - 6.25A
Power supply	220-240VAC 50Hz
Dimensions (L x W x H)	1195 x 620 x 1250mm
Weight	46,00kg





SNOW5000
HIGH VOLUME SNOW MACHINE

- Professional and powerful snowmachine
- Snowflakes effect
- Constant use creates a foam layer that gradually dissolves and leaves practically no residue
- Solid flightcase with wheels
- DMX in/output via 3-pin XLR
- Including 10m hose
- Maximum flow rate: 400ml per minute



160.756 CARTON **1** PALLET **6**

Tank capacity	20L
Modes	Automatic programs, DMX, Manual
DMX channels	2
DMX connection	3-pin XLR
Power consumption	6.7A
Power supply	220-240VAC 50Hz
Dimensions (L x W x H)	590 x 550 x 600mm
Weight	30,90kg





160.777 CARTON **2** PALLET **120**


Modes	DMX, Manual
DMX channels	2
DMX connection	3-pin XLR
Power consumption	1.26 - 0.54A
Power supply	230/240VAC 50/60Hz
Dimensions (L x W x H)	410 x 88 x 357mm
Weight	7,00kg

AF380
AXIAL BLOWER

- Air flow: max. 35m³/minute
- Fan speed manually controlled by rotary knob
- Rotational speed: 750 - 2250 rpm
- Adjustable angle (360°)
- Heavy-duty steel frame
- Noise level: around 73 dB at maximum output
- P-Con in/out
- Wired remote control, cable length 3m







CC1200
CONFETTI LAUNCHER



- Works with most confetti types
- No compressed air or CO2 required
- DMX in/output via 3-pin XLR
- Powerconnector input/output

160.762 CARTON **1** PALLET **20**

Modes	Auto programs, DMX
DMX channels	1, 2
DMX connection	3-pin XLR
Power consumption	160OW
Power supply	220-240VAC 50Hz
Dimensions (L x W x H)	275 x 275 x 510mm
Weight	6,60kg







BG7000
BUBBLE GIANT PRO

- 25 seconds covers 100m2
- Generates a continuous torrent of bubbles
- 42 fans set at the back of the unit spread the bubble far apart
- Solid flightcase with wheels
- DMX in/output via 3-pin XLR
- Powerconnector input



160.759 CARTON **1** PALLET **1**

Modes	Auto programs, DMX
DMX channels	1, 2
DMX connection	3-pin XLR
Power consumption	420W
Power supply	220-240VAC 50Hz
Dimensions (L x W x H)	520 x 930 x 1520mm
Weight	73,50kg

P30 SERIES
ALUMINIUM SQUARE TRUSS

BeamZ P30 Truss means strength, durability, stability, lightweight and total flexibility! The P30 truss is constructed of main tubes (51 x 2 mm) and diagonals (16 x 2 mm) and equipped with the P30 conical coupling system what makes it fast and easy to assemble. You can chose between black or aluminium colour. Available in a variety of lengths, corners and accessories you are able to create an almost infinite combination of shapes and designs for your venue. Ideal trussing system for rental, touring and exhibition companies.


Key advantages of BeamZ P30 Truss:

- Lightweight for easy transport
- European-made
- Resistant to heat, cold, moisture and corrosion
- Secure P30 conical connection system for quick setup
- High tensile strength for enhanced durability
- Low maintenance
- Also available in black colour
- Certified and inspected to meet highest safety standards


P30 TRUSS LOADING CHART

Span width		Uniformly distributed load UDL		Deflection	Centre point load CPL		Deflection	Third point load TPL		Quarter point load QPL		Fifth point load FPL	
m	ft	kg/m	lbs/ft	cm	kg	lbs	cm	kg	lbs	kg	lbs	kg	lbs
3	9,8	651	438	0,6	1181	2604	0,5	796	1754	638	1408	488	1077
4	13,1	487	327	1,3	939	2071	1,0	645	1422	515	1135	403	888
5	16,4	351	236	2,4	774	1708	1,7	540	1191	416	918	330	617
6	19,7	245	164	3,4	656	1448	2,5	464	1024	348	769	279	531
7	23,0	179	120	4,7	568	1253	3,4	405	892	300	661	240	465
8	26,2	136	91	6,1	501	1106	4,6	359	793	263	580	211	414
9	29,5	107	72	7,8	444	979	5,9	320	706	233	513	188	373
10	32,8	86	57	9,7	399	881	7,3	290	639	207	457	169	337
11	36,1	70	47	11,7	361	796	9,0	263	581	187	413	152	337
12	39,4	58	39	14,0	328	724	10,8	241	531	170	375	138	305
13	42,7	49	33	16,5	300	662	12,8	220	486	155	341	127	280
14	45,9	41	28	19,2	276	608	15,0	203	449	142	313	116	256
15	49,2	35	24	22,0	254	561	17,4	187	414	130	288	107	236
16	52,5	30	20	25,1	235	519	20,1	173	383	120	264	99	218
17	55,8	26	17	28,4	217	478	22,8	161	357	111	245	91	201
18	59,1	23	15	31,9	201	444	25,9	150	331	102	226	84	187
19	62,3	20	13	35,6	186	410	29,1	139	308	95	209	78	173
20	65,6	17	12	39,6	173	382	32,6	130	286	88	194	73	160


- Tüv certification only valid for loading table above
- The values are characteristic according to Eurocode (European standards). Partial safety factors (1,35/1,5) are considered
- Interaction of internal forces at connector are considered
- The table data have no limitation of deflection
- The loads are only valid for static loads. The system is perfect and secured against lateral bucking
- All static systems, other than single spans, need an individual structural calculation. Please contact a structural engineer
- The self-weight of the truss system is considered
- Loading figures are only valid for single spans with supports at both ends
- The deflection is calculated for a single truss spann
- Load application occurs directly in the nodes and both framework sides are loaded equally
- The values are only valid for the single span girders analysed here. Complex structures are not covered by this!
- Read the manual before assembling, using and loading the truss

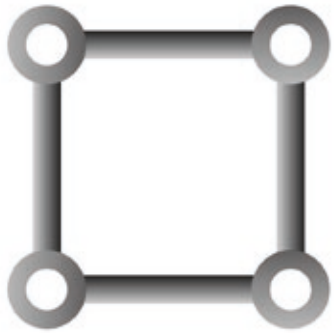


CHORDS Ø50x2mm
BRACES Ø16x2mm
DIMENSIONS 290x290mm





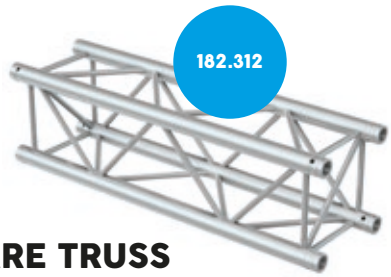


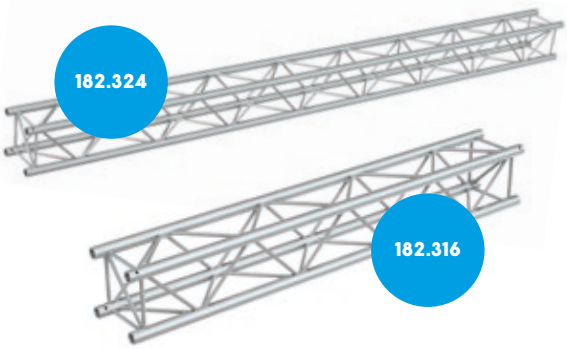


P30-L SERIES
ALUMINIUM SQUARE TRUSS

	182.307	182.308	182.310	182.311	182.312	182.314
NAME	**P30-L021**	**P30-L029**	**P30-L050**	**P30-L071**	**P30-L100**	**P30-L150**
CARTON	**1**	**1**	**1**	**1**	**1**	**1**
PALLET	**48**	**40**	**24**	**24**	**14**	**8**
Length	21cm	29cm	50cm	71cm	1m	1,5m
Alloy	EN-AW 6082 T6					
Braces	16 x 2mm					
Dimensions	290 x 290mm					
Weight	2,50kg	3,00kg	3,40kg	4,60kg	5,70kg	7,90kg

	182.316	182.318	182.320	182.322	182.324
NAME	**P30-L200**	**P30-L250**	**P30-L300**	**P30-L350**	**P30-L400**
CARTON	**1**	**1**	**1**	**1**	**1**
PALLET	**24**	**20**	**16**	**16**	**16**
Length	2m	2,5m	3m	3,5m	4m
Alloy	EN-AW 6082 T6				
Braces	16 x 2mm				
Dimensions	290 x 290mm				
Weight	10,10kg	12,50kg	14,50kg	16,70kg	18,90kg



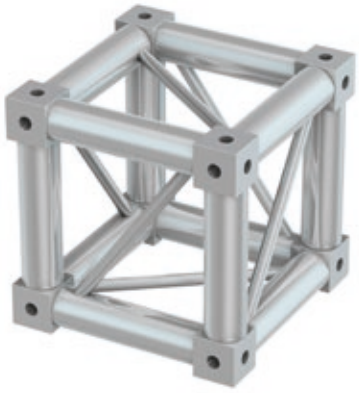

P30-MCB
MULTI CONNECTION BOX

182.326 CARTON **1** PALLET **48**

Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Dimensions (L x W x H)	290 x 290 x 290mm
Weight	7,60kg



P30-C19
2-WAY CORNER 45°

182.328 CARTON **1** PALLET **7**


Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Dimensions (L x W x H)	1000 x 1000 x 290mm
Weight	7,30kg



P30-C20
2-WAY CORNER 60°

182.330 CARTON **1** PALLET **6**


Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Dimensions (L x W x H)	1000 x 1000 x 290mm
Weight	8,20kg

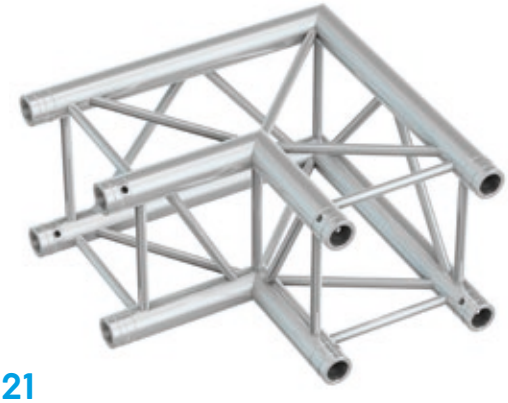

P30-C21
2-WAY CORNER 90°

182.332 CARTON **1** PALLET **20**

Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Dimensions (L x W x H)	500 x 500 x 290mm
Weight	4,70kg

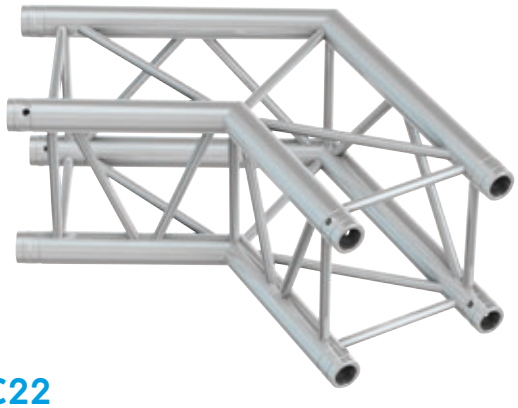

P30-C22
2-WAY CORNER 120°

182.334 CARTON **1** PALLET **6**


Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Dimensions (L x W x H)	500 x 500 x 290mm
Weight	5,30kg



P30-C23
2-WAY CORNER 135°

182.336 CARTON **1** PALLET **6**


Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Dimensions (L x W x H)	500 x 500 x 290mm
Weight	5,30kg

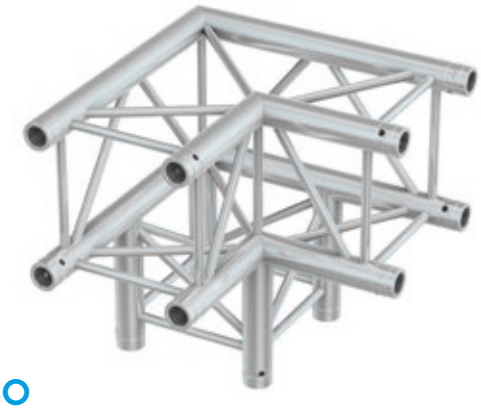

P30-C30
3-WAY CORNER 90°

182.338	CARTON 1	PALLET 16


Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Dimensions (L x W x H)	500 x 500 x 500mm
Weight	6,40kg

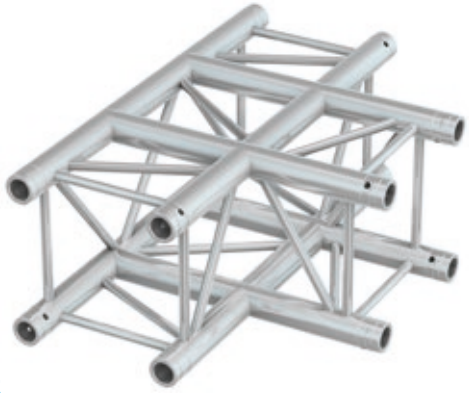

P30-T35
3-WAY T-JUNCTION

182.340	CARTON 1	PALLET 12


Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Dimensions (L x W x H)	500 x 710 x 290mm
Weight	7,00kg

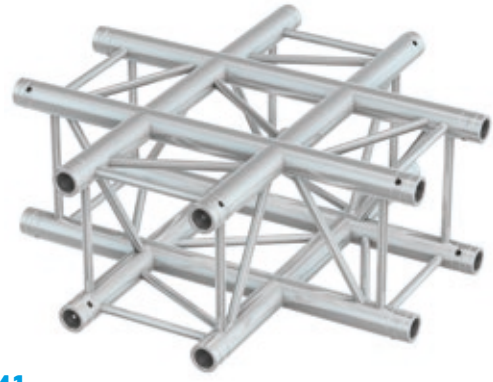

P30-C41
4-WAY CROSS

182.342	CARTON 1	PALLET 8


Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Dimensions (L x W x H)	710 x 710 x 290mm
Weight	8,70kg

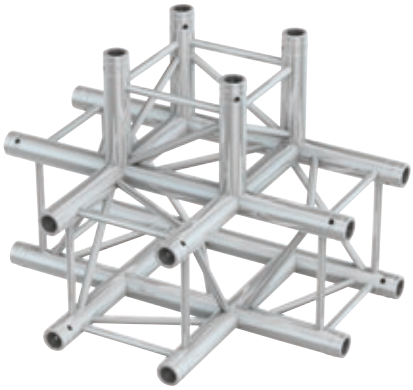

P30-T42
4-WAY T-JUNCTION

182.344	CARTON 1	PALLET 8


Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Dimensions (L x W x H)	500 x 710 x 500mm
Weight	8,50kg

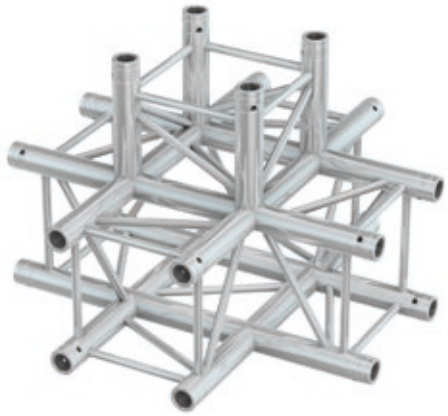

P30-C55
5-WAY CROSS

182.346	CARTON 1	PALLET 6

Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Dimensions (L x W x H)	710 x 710 x 500mm
Weight	9,20kg

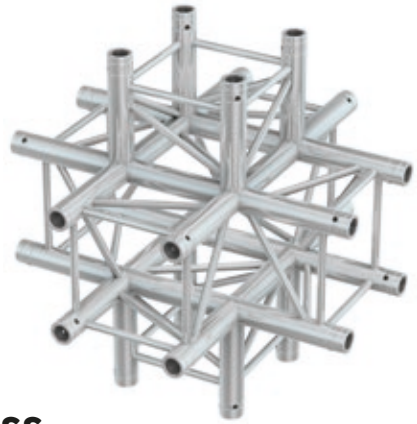

P30-C60
6-WAY CROSS

182.348	CARTON 1	PALLET 6

Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Dimensions (L x W x H)	710 x 710 x 710mm
Weight	11,20kg



P30 MCB CONNECTOR SET



- Set contains 4 conical connectors, 4 conical spigots, 4 screws, 4 safety spring
- Coupling system P30

182.365 CARTON **20**

Weight	0,90kg

P30 CONNECTOR SET



- Set contains 4 conical couplers, 8 conical spigots, 8 safety spring
- Coupling system P30

182.366 CARTON **1**

Weight	1,00kg

P30 TRUSS BASE PLATE



- For coupling system P30

182.368 CARTON **1**

Dimensions (L x W x H)	300 x 300 x 6mm
Weight	1,40kg

P30 HALF CONE CONNECTORS




- Set contains 4 half cone couplers, 4 conical spigots, 4 safety springs

182.369 CARTON **35**

Dimensions (L x W x H)	115 x 105 x 45mm
Weight	0,55kg

P3O SERIES
SQUARE TRUSS

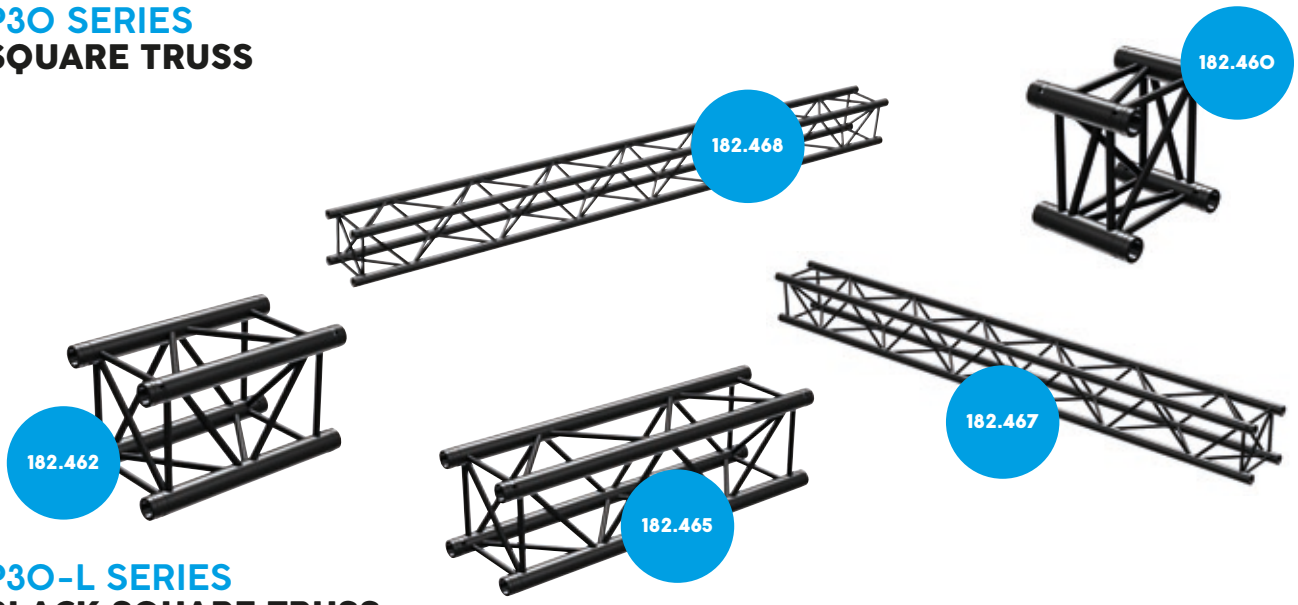


P3O-L SERIES
BLACK SQUARE TRUSS

	182.460	182.461	182.462	182.463	182.464
NAME	P3O-LO21	P3O-LO29	P3O-LO5O	P3O-L1OO	P3O-L15O
CARTON	1	1	1	1	1
PALLET	65	4O	36	14	6
Length	21cm	29cm	5Ocm	1m	1,5m
Alloy			EN-AW 6O82 T6		
Braces			16 x 2mm		
Dimensions			29O x 29Omm		
Weight	2,5Okg	3,OOkg	3,4Okg	5,7Okg	7,9Okg

	182.465	182.466	182.467	182.468	182.469
NAME	P3O-L2OO	P3O-L25O	P3O-L3OO	P3O-L35O	P3O-L4OO
CARTON	1	1	1	1	1
PALLET	24	9	16	12	9
Length	2m	2,5m	3m	3,5m	4m
Alloy			EN-AW 6O82 T6		
Braces			16 x 2mm		
Dimensions			29O x 29Omm		
Weight	1O,1Okg	12,5Okg	14,5Okg	16,7Okg	18,9Okg



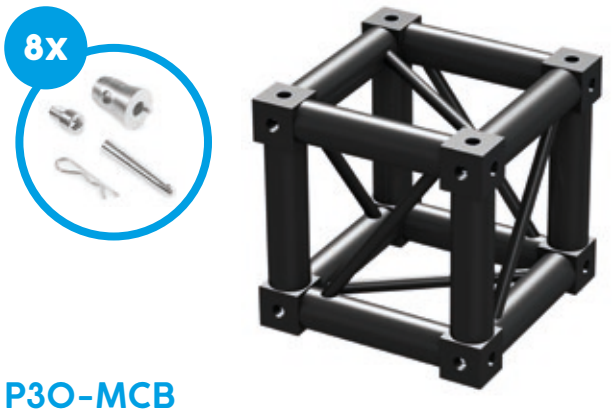

P30-MCB
MULTI CONNECTION BOX

182.470 CARTON **1** PALLET **30**

Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Dimensions (L x W x H)	290 x 290 x 290mm
Weight	7,60kg



P30-C19
2-WAY CORNER 45°

182.471 CARTON **1** PALLET **7**

Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Dimensions (L x W x H)	1000 x 1000 x 290mm
Weight	7,30kg



P30-C20
2-WAY CORNER 60°

182.472 CARTON **1** PALLET **6**

Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Dimensions (L x W x H)	1000 x 1000 x 290mm
Weight	8,20kg



P30-C21
2-WAY CORNER 90°

182.473 CARTON **1** PALLET **12**

Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Dimensions (L x W x H)	500 x 500 x 290mm
Weight	4,70kg



P30-C22
2-WAY CORNER 120°

182.474 CARTON **1** PALLET **6**

Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Dimensions (L x W x H)	500 x 500 x 290mm
Weight	5,30kg



P30-C23
2-WAY CORNER 135°

182.475 CARTON **1** PALLET **6**

Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Dimensions (L x W x H)	500 x 500 x 290mm
Weight	5,40kg



P30-C30
3-WAY CORNER 90°

182.476 CARTON **1** PALLET **6**

Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Dimensions (L x W x H)	500 x 500 x 290mm
Weight	6,40kg



P30-T35
3-WAY T-JUNCTION

182.477 CARTON **1** PALLET **12**

Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Dimensions (L x W x H)	500 x 710 x 290mm
Weight	7,00kg



P30-C41
4-WAY CROSS

182.478 CARTON **1** PALLET **8**

Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Dimensions (L x W x H)	710 x 710 x 290mm
Weight	8,70kg



P30-T42
4-WAY T-JUNCTION

182.479 CARTON **1** PALLET **6**


Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Dimensions (L x W x H)	500 x 710 x 500mm
Weight	8,50kg



P30-C55
5-WAY CROSS

182.480 CARTON **1** PALLET **4**

Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Dimensions (L x W x H)	710 x 710 x 500mm
Weight	9,20kg

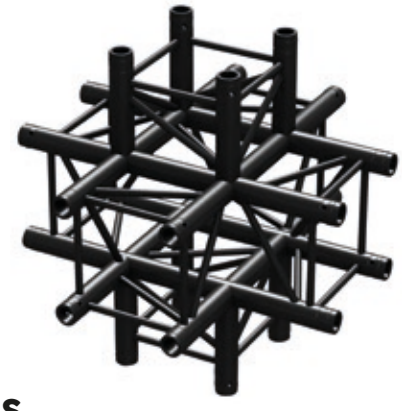

P30-C60
6-WAY CROSS

182.481 CARTON **1** PALLET **2**

Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Dimensions (L x W x H)	710 x 710 x 710mm
Weight	11,20kg



P30
MCB CONNECTOR SET



- Set contains 4 conical connectors, 4 conical spigots, 4 screws, 4 safety spring
- Coupling system P30

182.365 CARTON **20**

Weight	0,90kg

P30
CONNECTOR SET



- Set contains 4 conical couplers, 8 conical spigots, 8 safety spring
- Coupling system P30

182.366 CARTON **1**

Weight	1,00kg

P30
TRUSS BASE PLATE



- For coupling system P30

182.482 CARTON **1** PALLET **250**

Dimensions (L x W x H)	300 x 300 x 6mm
Weight	1,40kg

P30
HALF CONE CONNECTORS



- Set contains 4 half cone couplers, 4 conical spigots, 4 safety springs

182.369 CARTON **35**

Dimensions (L x W x H)	115 x 105 x 45mm
Weight	0,55kg

P30
TRUSS BASEPLATE WITH FIXED WELDED RECEIVERS

- Black powder coating
- For coupling system P30
- Fast and easy to assemble
- Lightweight
- Made in Europe

182.381 CARTON **1** PALLET **200**

Alloy	EN-AW 6082 T6
Dimensions (L x W x H)	307 x 307 x 5mm
Weight	2,00kg




P33 SERIES
TRUSS

BeamZ P33 Truss means strength, durability, stability, lightweight and total flexibility! The P33 truss is constructed of main tubes (50 x 2 mm) and diagonals (16 x 2 mm) and equipped with the P33 conical coupling system what makes it fast and easy to assemble. You can chose between black or aluminium colour. Available in a variety of lengths, corners and accessories you are able to create an almost infinite combination of shapes and designs for your venue. Ideal trussing system for rental, touring and exhibition companies.

Key advantages of BeamZ P30 Truss:

- Lightweight for easy transport
- European-made
- Resistant to heat, cold, moisture and corrosion
- Secure P33 conical connection system for quick setup
- High tensile strength for enhanced durability
- Low maintenance
- Also available in black colour
- Certified and inspected to meet highest safety standards

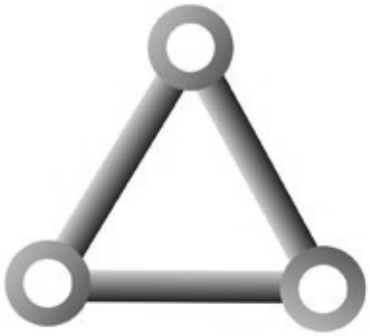


CHORDS Ø50 x 2mm
BRACES Ø16 x 2mm
DIMENSIONS 290 x 290mm


P33 TRUSS LOADING CHART

Span width		Uniformly distributed load UDL		Deflection	Centre point load CPL		Deflection	Third point load TPL		Quarter point load QPL		Fifth point load FPL	
m	ft	kg/m	lbs/ft	cm	kg	lbs	cm	kg	lbs	kg	lbs	kg	lbs
3	9,8	425	285	0,7	565	1247	0,5	394	870	304	670	241	531
4	13,1	241	162	1,3	436	961	1,0	310	685	230	507	184	407
5	16,4	153	103	2,1	354	780	1,5	253	559	184	407	149	330
6	19,7	105	71	3,0	296	654	2,3	214	472	154	339	125	275
7	23,0	76	51	4,1	254	560	3,1	184	407	131	289	107	236
8	26,2	58	39	5,3	220	486	4,1	161	357	113	250	92	204
9	29,5	45	30	6,8	194	428	5,3	143	315	99	219	81	180
10	32,8	36	24	8,4	172	380	6,6	127	280	88	195	72	160
11	36,1	29	19	10,1	154	340	8,1	114	252	78	173	65	143
12	39,4	24	16	12,1	139	306	9,7	103	227	71	156	58	129
13	42,7	19	13	14,2	125	276	11,5	93	207	63	141	52	116
14	45,9	16	11	16,6	113	250	13,5	85	188	57	127	47	105
15	49,2	14	9	19,1	102	227	15,7	78	172	52	115	43	96
16	52,5	12	8	21,7	93	206	18,1	71	156	47	105	39	87

- Tüv certification only valid for loading table above
- The values are characteristic according to Eurocode (European standards). Partial safety factors (1,35/1,5) are considered
- Interaction of internal forces at connector are considered
- The table data have no limitation of deflection
- The loads are only valid for static loads. The system is perfect and secured against lateral bucking
- All static systems, other than single spans, need an individual structural calculation. Please contact a structural engineer
- The self-weight of the truss system is considered
- Loading figures are only valid for single spans with supports at both ends
- The deflection is calculated for a single truss spann
- Load application occurs directly in the nodes and both framework sides are loaded equally
- The values are only valid for the single span girders analysed here. Complex structures are not covered by this!
- Read the manual before assembling, using and loading the truss



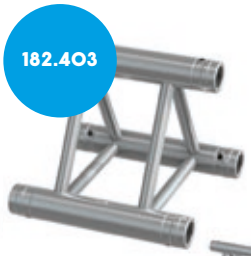






P33-L SERIES
TRIANGLE TRUSS

	182.401	182.403	182.405	182.406	182.407	182.409
NAME	P33-L021	P33-L029	P33-L050	P33-L070	P33-L100	P33-L150
CARTON	1	1	1	1	1	1
PALLET	48	40	24	24	20	10
Length	21cm	29cm	50cm	70cm	1m	1,5m
Alloy	EN-AW 6082 T6					
Braces	16 x 2mm					
Dimensions	290 x 290mm					
Weight	2,60kg	2,70kg	2,90kg	3,70kg	4,60kg	6,40kg

	182.411	182.413	182.415	182.417	182.419
NAME	P33-L200	P33-L250	P33-L300	P33-L350	P33-L400
CARTON	1	1	1	1	1
PALLET	24	20	12	10	10
Length	2m	2,5m	3m	3,5m	4m
Alloy	EN-AW 6082 T6				
Braces	16 x 2mm				
Dimensions	290 x 290mm				
Weight	8,10kg	9,90kg	11,70kg	13,50kg	15,30kg

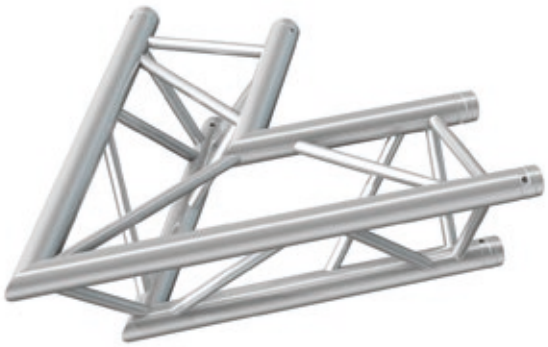

P33-C20
2-WAY CORNER 60°

182.423 CARTON **1** PALLET **6**

Length	1m
Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Weight	5,4Okg



P33-C21
2-WAY CORNER 90°

182.424 CARTON **1** PALLET **12**


Length	0,5m
Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Weight	5,4Okg



P33-C23
2-WAY CORNER 135°

182.426 CARTON **1** PALLET **12**


Length	0,5m
Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Weight	3,9Okg

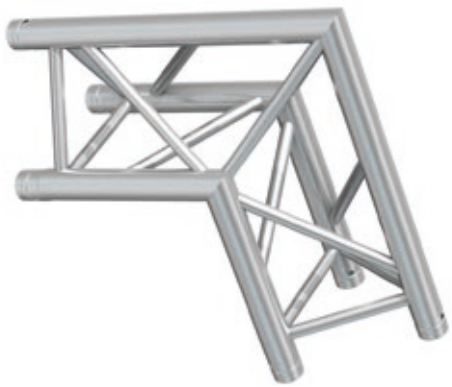

P33-C24
2-WAY 90° APEX OUT

182.427 CARTON **1** PALLET **12**

Length	0,5m
Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Weight	3,OOkg

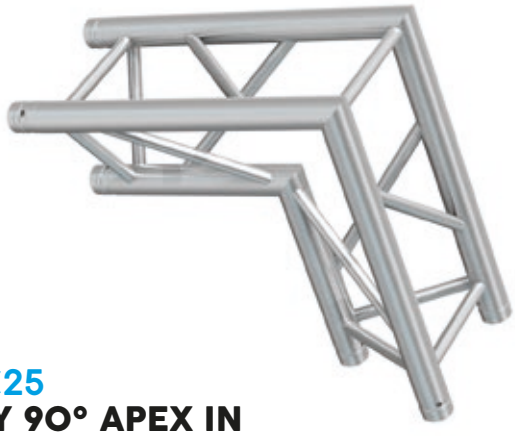

P33-C25
2-WAY 90° APEX IN

182.428 CARTON **1** PALLET **12**


Length	0,5m
Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Weight	3,5Okg



P33-C31
3-WAY 90° APEX UP RIGHT

182.429 CARTON **1** PALLET **12**


Length	0,5m
Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Weight	4,9Okg

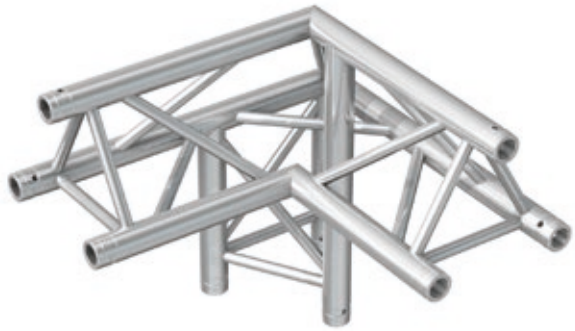

P33-C32
3-WAY 90° APEX UP LEFT

182.430 CARTON **1** PALLET **12**


Length	0,5m
Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Weight	4,90kg

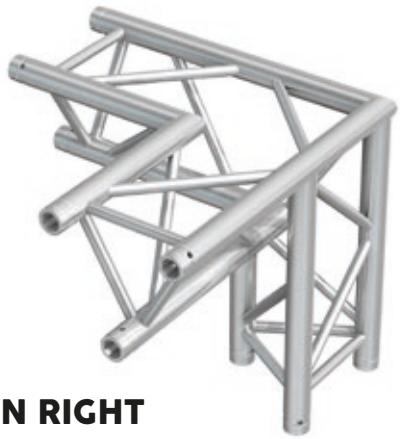

P33-C33
3-WAY 90° APEX DOWN RIGHT

182.431 CARTON **1** PALLET **12**

Length	0,5m
Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Weight	4,90kg

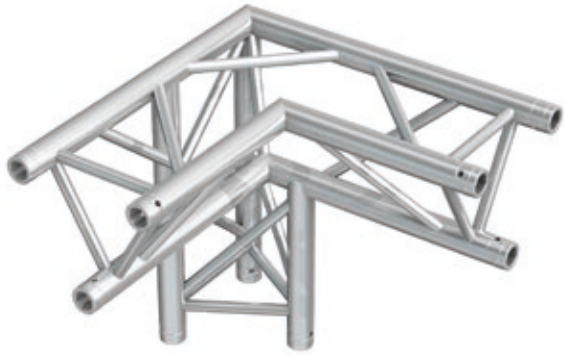

P33-C34
3-WAY 90° APEX DOWN LEFT

182.432 CARTON **1** PALLET **12**

Length	0,5m
Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Weight	4,90kg



P33-T35
3-WAY T VERTICAL APEX DOWN

182.433 CARTON **1** PALLET **12**

Length	0,5m
Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Weight	5,30kg



P33-T36
3-WAY T HORIZONTAL APEX DOWN

182.434 CARTON **1** PALLET **12**


Length	0,5m
Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Weight	4,60kg



P33-T38
3-WAY T VERTICAL APEX UP

182.436 CARTON **1** PALLET **12**

Length	0,5m
Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Weight	5,50kg

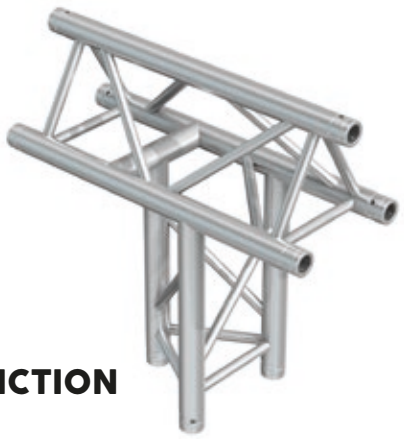

P33-T39
3-WAY T JUNCTION VERTICAL

182.437	CARTON 1	PALLET 12


Length	0,5m
Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Weight	4,7Okg



P33-C41
4-WAY X-JUNCTION HORIZONTAL

182.438	CARTON 1	PALLET 9

Length	0,5m
Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Weight	5,7Okg

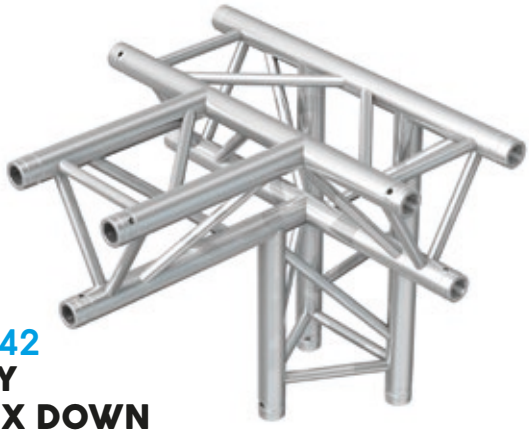

P33-T42
4-WAY T APEX DOWN

182.439	CARTON 1	PALLET 12

Length	0,5m
Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Weight	6,1Okg



P33-T43
4-WAY T APEX UP

182.440	CARTON 1	PALLET 12

Length	0,5m
Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Weight	6,1Okg



P33-C44
4-WAY 90° RIGHT

182.441	CARTON 1	PALLET 12

Length	0,5m
Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Weight	6,5Okg



P33-T51
5-WAY T APEX DOWN

182.443	CARTON 1	PALLET 12


Length	0,5m
Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Weight	7,6Okg



P33-T52
5-WAY T APEX UP

182.444 CARTON **1** PALLET **12**

Length	0,5m
Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Weight	7,20kg

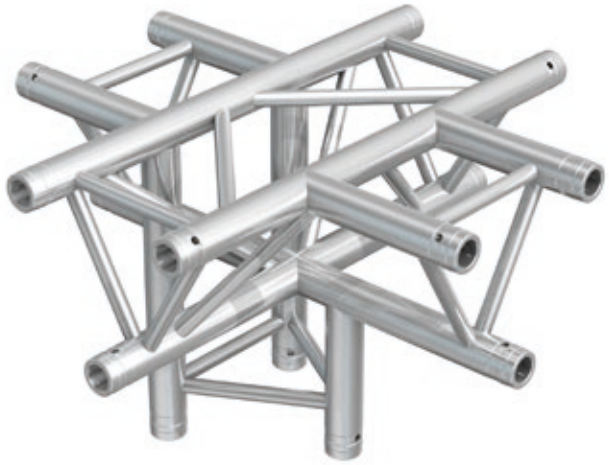

P33-C53
5-WAY X APEX DOWN

182.445 CARTON **1** PALLET **12**

Length	0,5m
Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Weight	7,20kg



P33
CONNECTION SET

- Set contains 3 conical couplers, 6 conical spigots, 6 safety spring
- Coupling system P33

182.450 CARTON **25**



P33
HALF CONE CONNECTORS (3)

- Set contains 3 half cone couplers, 3 conical spigots, 3 safety springs

182.453 CARTON **1**

Dimensions (L x W x H)	140 x 75 x 40mm
Weight	0,40kg




P33
TRIANGLE TRUSS BASE PLATE

- For coupling system P33

182.452 CARTON **1** PALLET **154**

Dimensions (L x W x H)	300 x 300 x 6mm
Weight	0,75kg

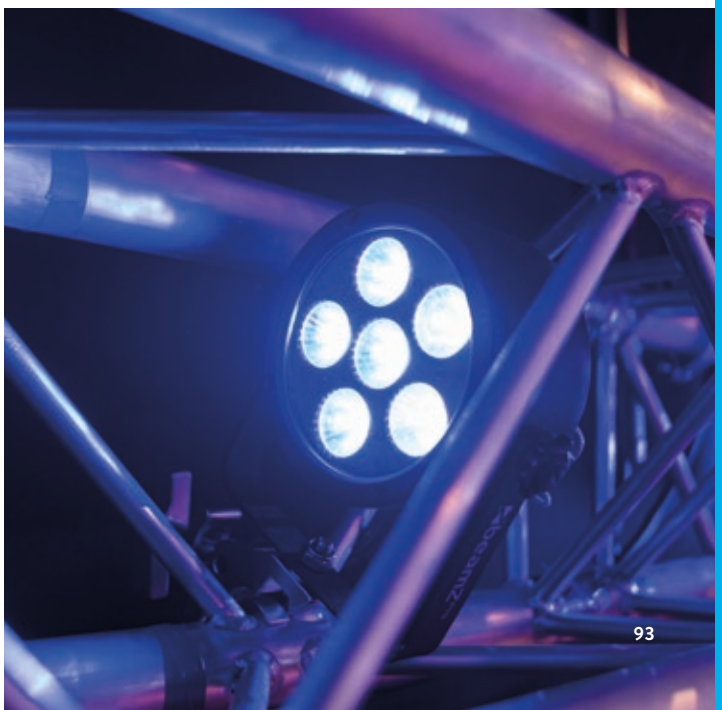

P32 SERIES
TRUSS

BeamZ P32 Truss means strength, durability, stability, lightweight and total flexibility! The P32 truss is constructed of main tubes (50 x 2 mm) and diagonals (16 x 2 mm) and equipped with the P32 conical coupling system what makes it fast and easy to assemble. You can chose between black or aluminium colour. Available in a variety of lengths, corners and accessories you are able to create an almost infinite combination of shapes and designs for your venue. Ideal trussing system for rental, touring and exhibition companies.

Key advantages of BeamZ P30 Truss:

- Lightweight for easy transport
- European-made
- Resistant to heat, cold, moisture and corrosion
- Secure P32 conical connection system for quick setup
- High tensile strength for enhanced durability
- Low maintenance
- Also available in black colour
- Certified and inspected to meet highest safety standards

- Tüv certification only valid for loading table above
- The values are characteristic according to Eurocode (European standards). Partial safety factors (1,35/1,5) are considered
- Interaction of internal forces at connector are considered
- The table data have no limitation of deflection
- The loads are only valid for static loads. The system is perfect and secured against lateral bucking
- All static systems, other than single spans, need an individual structural calculation. Please contact a structural engineer
- The self-weight of the truss system is considered
- Loading figures are only valid for single spans with supports at both ends
- The deflection is calculated for a single truss spann
- Load application occurs directly in the nodes and both framework sides are loaded equally
- The values are only valid for the single span girders analysed here. Complex structures are not covered by this!
- Read the manual before assembling, using and loading the truss

P32 TRUSS LOADING CHART


The following table applies provided that the truss is secured against lateral buckling every 1.0 m. The load may only be applied on the bottom chord!

Span width		UDL		Deflection	CPL		Deflection	TPL		QPL		FPL	
m	ft	kg/m	lbs/ft	cm	kg	lbs	cm	kg	lbs	kg	lbs	kg	lbs
2	6,56	329	221	0,19	658	1451	0,33	329	725	219	483	164	362
3	9,84	218	146	0,50	646	1426	0,83	328	723	218	482	164	361
4	13,12	163	109	1,06	483	1065	1,29	326	720	217	480	163	360
5	16,40	130	87	1,95	384	847	1,89	288	635	192	423	160	353
6	19,69	106	71	3,21	318	701	2,63	238	526	159	350	132	292
7	22,97	77	51	4,29	270	596	3,50	203	447	135	298	112	248
8	26,25	58	39	5,54	234	517	4,52	176	388	117	258	97	215
9	29,53	45	30	6,95	206	455	5,68	154	341	103	227	86	189
10	32,81	36	24	8,54	183	405	6,99	137	303	91	202	76	168
11	36,09	29	20	10,30	164	363	8,44	123	272	82	181	68	151
12	39,37	24	16	12,23	149	328	10,50	111	246	74	164	62	136

The following table applies in case the truss is held only at the ends.

Span width		UDL		Deflection	CPL		Deflection	TPL		QPL		FPL	
m	ft	kg/m	lbs/ft	cm	kg	lbs	cm	kg	lbs	kg	lbs	kg	lbs
1	3,28	660	443	0,05	660	1456	0,10	330	728	220	485	165	364
2	6,56	329	221	0,19	534	1178	0,27	329	725	219	483	164	362
3	9,84	117	78	0,27	175	387	0,23	131	290	87	193	73	161
4	13,12	36	24	0,25	73	162	0,21	55	122	36	81	30	67
5	16,4	14	9	0,24	35	77	0,21	26	58	17	38	14	32



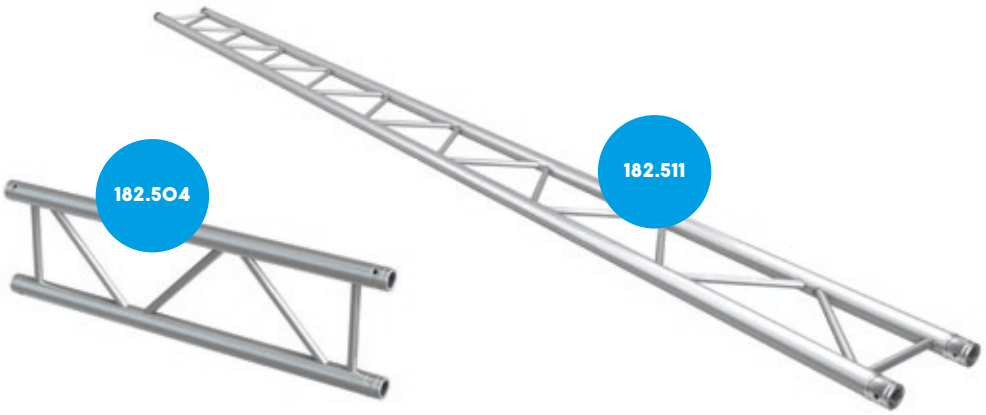


CHORDS Ø50 x 2mm
BRACES Ø16 x 2mm
DIMENSIONS 290 x 50mm

P32-L SERIES
DUO TRUSS

	182.500	182.501	182.502	182.503	182.504	182.505
NAME	P32-L021	P32-L029	P32-L050	P32-L71	P32-L100	P32-L150
CARTON	1	1	1	1	1	1
PALLET	342	270	144	20	66	45
Length	21cm	29cm	50cm	71cm	1m	1,5m
Alloy	EN-AW 6082 T6					
Braces	16 x 2mm					
Dimensions	210 x 290mm	290 x 290mm	500 x 290mm	710 x 290mm	1000 x 290mm	1500 x 290mm
Weight	1,03kg	1,09kg	1,50kg	1,95kg	2,47kg	3,44kg


	182.506	182.507	182.508	182.509	182.510	182.511
NAME	P32-L200	P32-L250	P32-L300	P32-L350	P32-L400	P32-L450
CARTON	1	1	1	1	1	1
PALLET	27	27	27	27	27	27
Length	2m	2,5m	3m	3,5m	4m	4,5m
Alloy	EN-AW 6082 T6					
Braces	16 x 2mm					
Dimensions	2000 x 290mm	2500 x 290mm	3000 x 290mm	3500 x 290mm	4000 x 290mm	4500 x 290mm
Weight	4,40kg	5,36kg	6,33kg	7,29kg	8,25kg	10,00kg

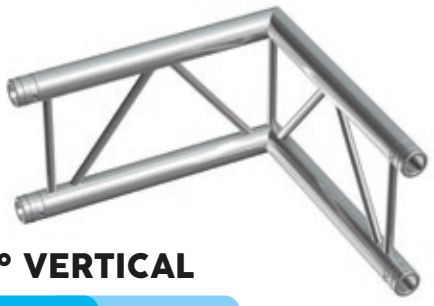

P32-C21
2-WAY 90° VERTICAL

182.516 CARTON **1** PALLET **14**

Length	0,5m
Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Weight	2,50kg

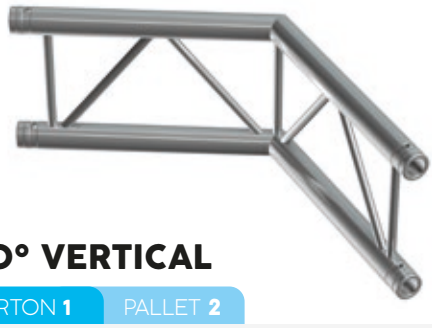

P32-C22
2-WAY 120° VERTICAL

182.518 CARTON **1** PALLET **2**

Length	0,5m
Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Weight	2,80kg



P32-C30
3-WAY 90° VERTICAL

182.522 CARTON **1** PALLET **14**

Length	0,5m
Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Weight	3,80kg



P32-T35
T-JUNCTION VERTICAL

182.524 CARTON **1** PALLET **13**

Length	0,5m
Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Weight	3,20kg



P32-C41
X-JUNCTION VERTICAL

182.526 CARTON **1** PALLET **8**

Length	0,5m
Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Weight	4,00kg



P32-C21H
DUO TRUSS 2-WAY 90°

182.529 CARTON **1** PALLET **50**

Length	0,5m
Alloy	EN-AW 6082 T6
Braces	16 x 2mm
Weight	2,50kg



P32
CONNECTION SET

- Set contains 2 conical couplers, 4 conical spigots, 4 safety spring

182.530 CARTON **10**



P32
TRUSS BASE PLATE

- For coupling system P32
- Fast and easy to assemble

182.532 CARTON **1**



P32
CONNECTORS (2)

- Set contains 2 half cone couplers, 2 conical spigots, 2 safety springs


182.533 CARTON **1**

P24 SERIES
TRUSS

BeamZ P24 Truss means strength, durability, stability, lightweight and total flexibility! The P24 truss is constructed of main tubes (35 x 1,5 mm) and diagonals (8 x 2 mm) and equipped with the P24 conical coupling system what makes it fast and easy to assemble. You can chose between black or aluminium colour. Available in a variety of lengths, corners and accessories you are able to create an almost infinite combination of shapes and designs for your venue. Ideal trussing system for rental, touring and exhibition companies.

Key advantages of BeamZ P30 Truss:

- Lightweight for easy transport
- European-made
- Resistant to heat, cold, moisture and corrosion
- Secure P24 conical connection system for quick setup
- High tensile strength for enhanced durability
- Low maintenance
- Also available in black colour
- Certified and inspected to meet highest safety standards




CHORDS Ø35 x 1,5mm
BRACES Ø8 x 2mm
DIMENSIONS 220 x 220mm

P24 TRUSS LOADING CHART

Span width		UDL		Deflection	CPL		Deflection	TPL		QPL		FPL	
m	ft	kg/m	lbs/ft	cm	kg	lbs	cm	kg	lbs	kg	lbs	kg	lbs
2	6,56	126	85	0,09	253	558	0,16	126	279	84	186	63	139
3	9,84	83	56	0,27	250	552	0,45	125	276	83	184	62	138
4	13,12	62	41	0,61	202	447	0,81	124	273	82	182	62	136
5	16,40	49	32	1,16	165	365	1,27	116	256	81	180	61	135
6	19,69	40	27	1,98	139	307	1,85	98	217	74	163	58	129
7	22,97	34	23	3,12	119	263	2,55	85	188	63	138	50	110
8	26,25	28	19	4,47	103	228	3,38	74	164	54	119	43	95
9	29,53	21	14	5,65	90	200	4,34	65	144	47	104	37	83
10	32,81	17	11	6,97	79	176	5,44	58	128	41	91	33	73


- Tüv certification only valid for loading table above
- The values are characteristic according to Eurocode (European standards). Partial safety factors (1,35/1,5) are considered
- Interaction of internal forces at connector are considered
- The table data have no limitation of deflection
- The loads are only valid for static loads. The system is perfect and secured against lateral bucking
- All static systems, other than single spans, need an individual structural calculation. Please contact a structural engineer
- The self-weight of the truss system is considered
- Loading figures are only valid for single spans with supports at both ends
- The deflection is calculated for a single truss spann
- Load application occurs directly in the nodes and both framework sides are loaded equally
- The values are only valid for the single span girders analysed here. Complex structures are not covered by this!
- Read the manual before assembling, using and loading the truss

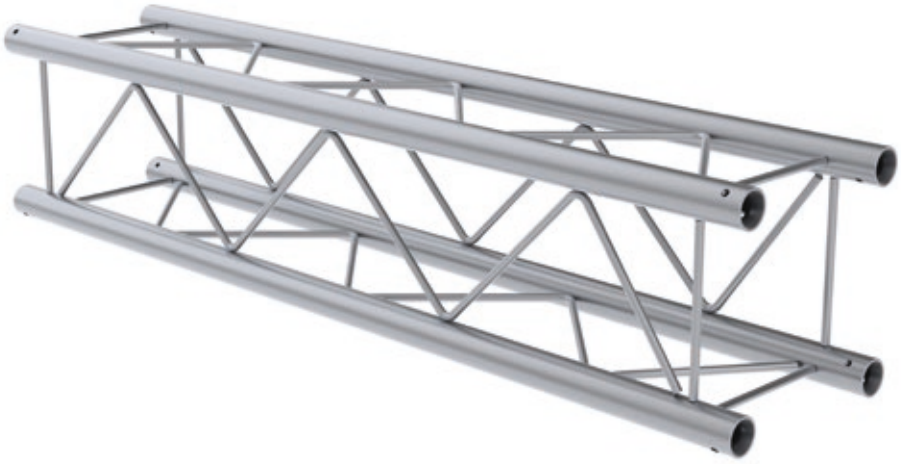

P24-L SERIES
DECO TRUSS

	182.540	182.542	182.543	182.544
NAME	**P24-L050**	**P24-L100**	**P24-L150**	**P24-L200**
CARTON	**1**	**1**	**1**	**1**
PALLET	**20**	**24**	**20**	**25**
Length	50cm	1m	1,5m	2m
Alloy	EN-AW 6082 T6			
Braces	8 x 2mm			
Dimensions	500 x 220 x 220mm	1000 x 220 x 220mm	1500 x 220 x 220mm	2000 x 220 x 220mm
Weight	1,80kg	2,60kg	4,80kg	6,40kg

	182.545	182.546	182.547	182.548
NAME	**P24-L250**	**P24-L300**	**P24-L350**	**P24-L400**
CARTON	**1**	**1**	**1**	**1**
PALLET	**25**	**20**	**20**	**20**
Length	2,5m	3m	3,5m	4m
Alloy	EN-AW 6082 T6			
Braces	8 x 2mm			
Dimensions	2500 x 220 x 220mm	3000 x 220 x 220mm	3500 x 220 x 220mm	4000 x 220 x 220mm
Weight	7,90kg	9,30kg	11,00kg	12,40kg






P24-MCB
MULTI CONNECTION BOX

182.560 CARTON **1** PALLET **96**

Alloy	EN-AW 6082 T6
Main Tubes (Chords)	35 x 1.5mm
Braces	8 x 2mm
Dimensions (L x W x H)	220 x 220mm
Weight	3,70kg






P24-C19
2-WAY 45° CORNER

182.550 CARTON **1** PALLET **6**

Alloy	EN-AW 6082 T6
Main Tubes (Chords)	35 x 1.5mm
Braces	8 x 2mm
Dimensions (L x W x H)	220 x 220mm
Weight	4,80kg







P24-C20
2-WAY 60° CORNER

182.551 CARTON **1** PALLET **6**

Alloy	EN-AW 6082 T6
Main Tubes (Chords)	35 x 1.5mm
Braces	8 x 2mm
Dimensions (L x W x H)	220 x 220mm
Weight	5,10kg




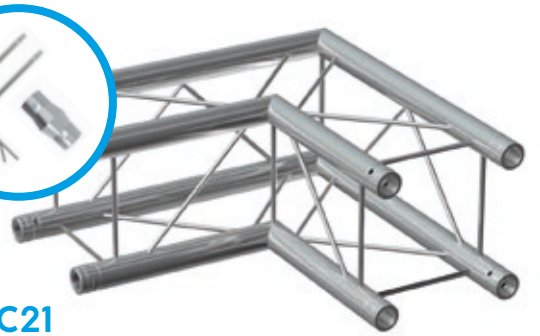


P24-C21
2-WAY 90° CORNER

182.552 CARTON **1** PALLET **24**

Alloy	EN-AW 6082 T6
Main Tubes (Chords)	35 x 1.5mm
Braces	8 x 2mm
Dimensions (L x W x H)	220 x 220mm
Weight	2,70kg




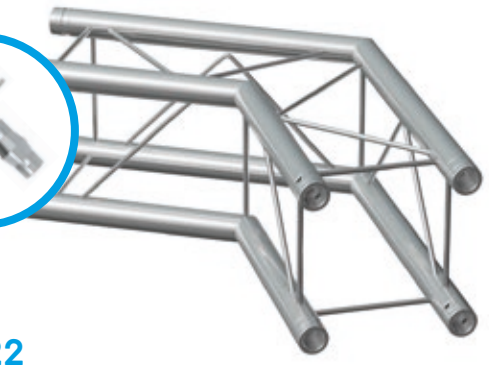

P24-C22
2-WAY 120° CORNER

182.553 CARTON **1** PALLET **8**

Alloy	EN-AW 6082 T6
Main Tubes (Chords)	35 x 1.5mm
Braces	8 x 2mm
Dimensions (L x W x H)	220 x 220mm
Weight	2,90kg



P24-C23
2-WAY 135° CORNER

182.554 CARTON **1** PALLET **8**


Alloy	EN-AW 6082 T6
Main Tubes (Chords)	35 x 1.5mm
Braces	8 x 2mm
Dimensions (L x W x H)	220 x 220mm
Weight	3,00kg



P24-C30
3-WAY 90° CORNER

182.555	CARTON 1	PALLET 16


Alloy	EN-AW 6082 T6
Main Tubes (Chords)	35 x 1.5mm
Braces	8 x 2mm
Dimensions (L x W x H)	220 x 220mm
Weight	3,70kg

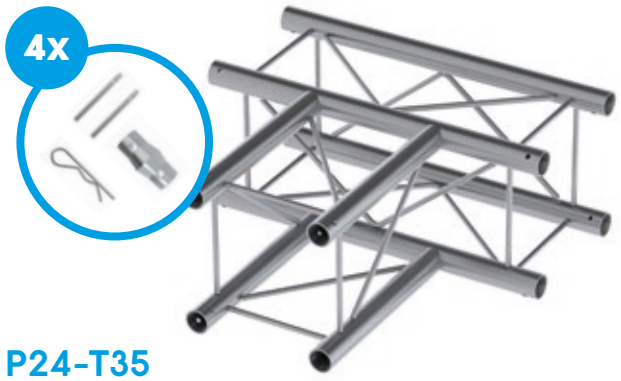

P24-T35
3-WAY T-JUNCTION

182.556	CARTON 1	PALLET 12


Alloy	EN-AW 6082 T6
Main Tubes (Chords)	35 x 1.5mm
Braces	8 x 2mm
Dimensions (L x W x H)	220 x 220mm
Weight	2,70kg

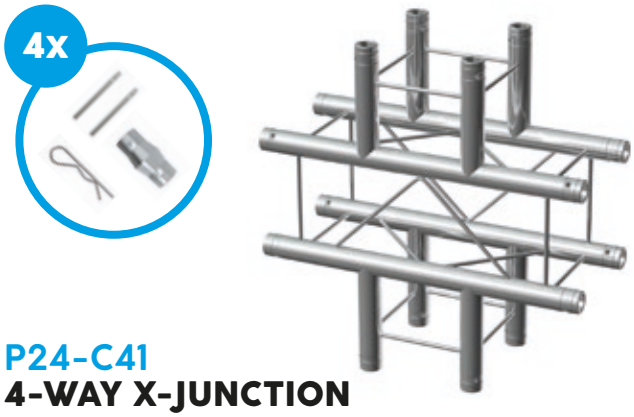

P24-C41
4-WAY X-JUNCTION

182.557	CARTON 1	PALLET 8


Alloy	EN-AW 6082 T6
Main Tubes (Chords)	35 x 1.5mm
Braces	8 x 2mm
Dimensions (L x W x H)	220 x 220mm
Weight	2,80kg

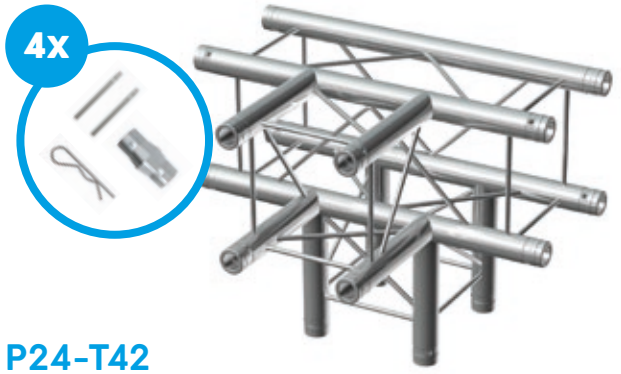


P24-T42
4-WAY T-JUNCTION

182.558	CARTON 1	PALLET 6

Alloy	EN-AW 6082 T6
Main Tubes (Chords)	35 x 1.5mm
Braces	8 x 2mm
Dimensions (L x W x H)	220 x 220mm
Weight	3,70kg



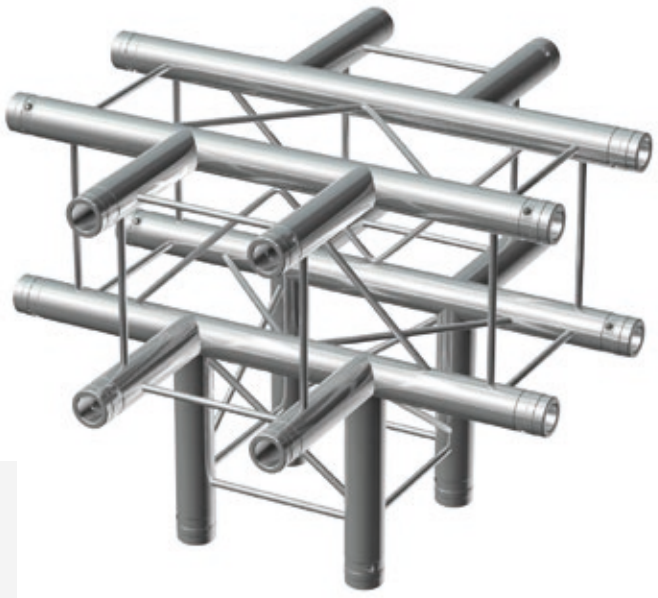

P24-C55
5-WAY T-JUNCTION

182.559	CARTON 1	PALLET 8

Alloy	EN-AW 6082 T6
Main Tubes (Chords)	35 x 1.5mm
Braces	8 x 2mm
Dimensions (L x W x H)	220 x 220mm
Weight	3,80kg



P24
CUBE CONNECTION SET

- Set contains 4 conical connectors, 4 conical spigots, 4 screws, 4 safety spring

182.561 CARTON **10**



P24
CONNECTION SET

- Set contains 4 conical couplers, 8 conical spigots, 8 safety spring

182.565 CARTON **20**



P24
DECO TRUSS BASE PLATE

- For coupling system P24

182.567 CARTON **1**

Dimensions (L x W x H)	300 x 300 x 20mm
Weight	0,85kg



P24
HALF CONE CONNECTORS (4)

- Set contains 4 half cone couplers, 4 conical spigots, 4 safety springs

182.568 CARTON **31**

Dimensions (L x W x H)	140 x 75 x 40mm
Weight	0,25kg



P30 TOWER SERIES
MODULAR TOWERS

Keep your lighting equipment secure with the beamZ Truss tower system, consisting of a top and base plate, four truss pipes in different sizes and a black or white Lycra cover. The sturdy construction of these truss towers provides a professional appearance and also offers a stable surface through the use of durable steel and aluminum.



P30 TOWER SERIES
PLATES AND MOUNTING SET

	182.393	182.400
COLOUR	ALUMINIUM	BLACK
CARTON	1	1
PALLET	55	55
Dimensions: Top	350 x 350 x 5mm	
Dimensions: Base	600 x 600 x 5mm	
Weight	7,15kg	

P30 TOWER SERIES
POLES SET (4)

	182.397	182.398	182.399
COLOUR	ALUMINIUM	ALUMINIUM	ALUMINIUM
CARTON	4	4	4
PALLET	55	55	55
Height	1m	1,5m	2m
Weight	4,20kg	5,85kg	7,20kg

P30 TOWER SERIES
COVERS

	182.583	182.589	182.595	182.580	182.586	182.592
COLOUR	ALUMINIUM	ALUMINIUM	ALUMINIUM	BLACK	BLACK	BLACK
CARTON	1	1	1	1	1	1
PALLET	55	20	20	55	20	20
Height	1m	1,5m	2m	1m	1,5m	2m
Weight	0,15kg	0,20kg	0,30kg	0,15kg	0,20kg	0,30kg

P30 SERIES
TOWER TRAVEL BAGS

- Durable nylon
- Ensures easy transporting
- Will protect you tower against bumps and scratches

	182.386	182.387	182.388
CARTON	1	1	1
Height	1m	1,5m	2m
Dimensions	1250x700x200mm	1600x700x200mm	2100x700x200mm
Weight	2,00kg	3,00kg	4,00kg



TRUSS SERIES
ACCESSORIES





TROLLEY SERIES
TRANSPORT MIDDLE STACK (4)

- For quick and secure stacking of truss elements
- Fits the beamZ Pro truss and other brands of 290mm truss
- Set of 4 pieces

182.577 CARTON **8**

Dimensions (L x W x H)	598 x 30 x 50mm
Weight	0,50kg



TROLLEY SERIES
TRUSS TRANSPORT TROLLEY

Delivery includes:
- 2x lower stack
- 1x lashing strap

- Plywood 24mm with hexa anti-slip finish
- Heavy-duty rubber coated ball bearing wheels
- Suitable for beamZ Pro truss and other brands of 290mm truss
- Load capacity: 450kg
- Castors with locking brake

182.575 CARTON **1** PALLET **36**

Dimensions (L x W x H)	495 x 600 x 149mm
Weight	6,50kg







LTS SERIES
TRUSS COVERS

- Designed to fit 30x30cm trussing
- Fitted with a zipper for easy installation
- Covers all sides of the truss
- Can be lit up from the back with a variety of different effects
- Flame-retardant

	180.062	180.063	180.064	180.065	180.060	180.061
NAME	LTS1OW	LTS1OB	LTS2OW	LTS2OB	LTS3OW	LTS3OB
COLOUR	WHITE	BLACK	WHITE	BLACK	WHITE	BLACK
CARTON	10	10	10	10	10	10
Height	1m	1m	2m	2m	3m	3m
Weight	0,20kg	0,20kg	0,40kg	0,50kg	0,60kg	0,60kg



P30
TRUSS BASE PLATE

- Black powder coating
- For coupling system P30
- Fast and easy to assemble
- Made in Europe
- Supplied without half-connectors (182.369)

182.482 CARTON **1** PALLET **250**

Dimensions (L x W x H)	300 x 300 x 6mm
Weight	1,40kg




UBP99
TRUSS BASE PLATE

- Steel base plate
- Fast and easy to assemble
- Suitable for P24, P30, P32 and P33
- Made in Europe
- Supplied without half-connectors (182.369)

182.493 CARTON **1** PALLET **30**

Dimensions (L x W x H)	990 x 330 x 8mm
Weight	19,10kg








UBP SERIES
TRUSS BASE PLATES

- Steel base plate
- Fast and easy to assemble
- Suitable for P24, P30, P32 and P33
- Made in Europe
- Supplied without half-connectors (182.369)

	182.485	182.487	182.489
NAME	**UBP45**	**UBP60**	**UBP80**
CARTON	**1**	**1**	**1**
PALLET	**80**	**40**	**30**
Size	45x45cm	60x60cm	80x80cm
Dimensions	450 x 450 x 5mm	600 x 600 x 5mm	800 x 800 x 5mm
Weight	7,80kg	12,80kg	25,00kg







PSP-M SERIES
MALE SPACERS

- Coupling system P30
- Fast and easy to assemble
- Lightweight
- Made in Europe

	182.370	182.371	182.372	182.373	182.374
NAME	**PSP-M1**	**PSP-M2**	**PSP-M3**	**PSP-M4**	**PSP-M5**
CARTON	**20**	**20**	**20**	**20**	**20**
Length	1cm	2cm	3cm	4cm	5cm
Dimensions			0.5 x 0.5mm		
Weight	0,19kg	0,26kg	0,31kg	0,36kg	0,41kg



P30
CONICAL CONNECTOR SET

- Coupling system P30
- Designed to offer a stablisch and strong truss connection
- The shape of the connector will offer easy assemble or disassemble
- Made in Europe

182.367 CARTON **7**

Weight	3,20kg



P-SPIGOT
24 PIECES

- Coupling system P30
- Designd to offer a stablisch and strong truss connection
- The shape of the connector will offer easy assemble or disassemble
- Made in Europe

182.382 CARTON **18**

Weight	2,40kg



P-SPIGOT THREAD
24 PIECES

- Coupling system P30
- Designd to offer a stablisch and strong truss connection
- The shape of the connector will offer easy assemble or disassemble
- Made in Europe

182.383 CARTON **18**

Weight	2,40kg



P-SAFETY SPRING
24 PIECES

- Lock spring for quick and easy securing of the coupling system
- Fast and easy to assemble
- Made in Europe

182.384 CARTON **28**

Weight	0,10kg

P31 SERIES
SINGLE TUBES



	182.300	182.301	182.302	182.303
COLOUR			BLACK	
CARTON	1	1	1	1
Height	0,5m	1m	2m	3m
Weight	0,73kg	1,27kg	2,10kg	3,4kg

DRO1
H DOWNRIGGER

- Downrigger H shape
- Maximum load 100kg
- Black powder coating
- Suitable for the P30 truss systems
- One or more luminaires on a different level in your truss
- Made in Europe



182.350 CARTON **1** PALLET **36**

Dimensions (L x W x H)	750 x 1000mm
Weight	5,00kg

DRO2
T DOWNRIGGER

- Downrigger T shape
- Maximum load 100kg
- Black powder coating
- Suitable for the P30 truss systems
- One or more luminaires on a different level in your truss
- Made in Europe



182.352 CARTON **1** PALLET **108**

Dimensions (L x W x H)	200 x 500mm
Weight	2,50kg

DRO3
DOWNRIGGER

- Single downrigger
- Maximum load 100kg
- Black powder coating
- Suitable for the P30 truss systems
- One or more luminaires on a different level in your truss
- Made in Europe



182.354 CARTON **14** PALLET **448**

Dimensions (L x W x H)	188 x 200mm
Weight	1,70kg

P30HCK
CONNECTOR KIT

- Half conical connector kit with M10 thread
- Kit contains 1 half conical coupler, 1 conical spigot with thread, 1 selflocking nut
- Maximum load 100kg
- Suitable for mounting the H and
- T downrigger to the P30 truss systems
- Made in Europe



182.356 CARTON **1**

Weight	0,50kg



50kg



BCQ50B-50
G-CLAMP
QUICK LOCK

151.434 CARTON **20**

Material	Metal
Diameter tube	15 - 51mm
Threaded bolt	M10
Max. weight load	50kg
Weight	0,42kg

50kg



BC50B-50
G-CLAMP

151.435 CARTON **20**

Material	Metal
Diameter tube	15 - 51mm
Threaded bolt	M10
Max. weight load	50kg
Weight	0,42kg

30kg



CC50B
G-CLAMP

151.437 CARTON **40**

Material	Metal
Diameter tube	48 - 51mm
Threaded bolt	M10
Max. weight load	30kg
Weight	0,35kg

30kg



CC50SB
G-CLAMP

151.443 CARTON **40**

Material	Metal
Diameter tube	15 - 51mm
Threaded bolt	M10
Max. weight load	30kg
Weight	0,35kg

30kg



CC63B
G-CLAMP

151.449 CARTON **40**

Material	Metal
Diameter tube	32 - 51mm
Threaded bolt	M10
Max. weight load	30kg
Weight	0,15kg

50kg



CC60B
G-CLAMP

151.450 CARTON **20**

Material	Metal
Diameter tube	30 - 60mm
Threaded bolt	M10
Max. weight load	50kg
Weight	0,30kg

75kg



BC35(B)-75
COMPACT HALF COUPLER

151.409 ALU	151.408 BLACK

CARTON	**10**
Material	Aluminium
Diameter tube	32 - 35mm
Threaded bolt	M10
Max. weight load	75kg
Weight	0,14kg

75kg



BC38(B)-75
COMPACT HALF COUPLER

151.427 ALU	151.426 BLACK

CARTON	**10**
Material	Aluminium
Diameter tube	32 - 39mm
Threaded bolt	M10
Max. weight load	75kg
Weight	0,14kg

100kg



BC50(B)-100
HALF COUPLER

151.410 ALU	151.413 BLACK

CARTON	**10**
Material	Aluminium
Diameter tube	48 - 51mm
Threaded bolt	M10
Max. weight load	100kg
Weight	0,15kg

100kg



BC50(B)-100N
HALF COUPLER

151.412 ALU	151.414 BLACK

CARTON	**10**
Material	Aluminium
Diameter tube	48 - 51mm
Threaded bolt	M10
Max. weight load	100kg
Weight	0,15kg

250kg



BC50(B)-200
HALF COUPLER

151.415 ALU	151.416 BLACK

CARTON	**10**
Material	Aluminium
Diameter tube	48 - 51mm
Threaded bolt	M10
Max. weight load	250kg
Weight	0,35kg

50kg



BSC50(A/B)
QUICK TRIGGER SELF LOCK

151.441	ALU	151.442	BLACK

CARTON	**10**
Material	Aluminium
Diameter tube	38 - 51mm
Threaded bolt	M10
Max. weight load	50kg
Weight	0,23kg

100kg



BC50(B)-50
QUICK RELEASE HALF COUPLER

151.466	ALU	151.468	BLACK

CARTON	**10**
Material	Aluminium
Diameter tube	48 - 51mm
Threaded bolt	M10
Max. weight load	100kg
Weight	0,20kg

100kg



BC50(B)-50F
FOLDABLE QUICK RELEASE

151.470	ALU	151.472	BLACK

CARTON	**10**
Material	Aluminium
Diameter tube	48 - 51mm
Threaded bolt	M10
Max. weight load	100kg
Weight	0,35kg

50kg



BC50(B)-150F
FOLDABLE QUICK TRIGGER

151.474	ALU	151.476	BLACK

CARTON	**10**
Material	Aluminium
Diameter tube	32 - 63mm
Threaded bolt	M10
Max. weight load	50kg
Weight	0,40kg

250kg



BC50(B)-250T
QUICK TRIGGER SELF LOCK

151.421	ALU	151.422	BLACK

CARTON	**10**
Material	Aluminium
Diameter tube	40 - 63mm
Threaded bolt	M10
Max. weight load	250kg
Weight	0,46kg

250kg



BC50(B)-250Q
TRIGGER CLAMP

151.423 ALU	151.424 BLACK

CARTON	**5**
Material	Aluminium
Diameter tube	48 - 51mm
Threaded bolt	M10
Max. weight load	250kg
Weight	0,47kg

50kg



BC50B-75M
FOLDABLE MOVING HEAD QUICK TRIGGER

151.478 CARTON 2

Material	Aluminium
Diameter tube	48 - 63mm
Threaded bolt	M10
Max. weight load	50kg
Weight	0,50kg

100kg



BC50-100D
SWIVEL COUPLER

151.411 CARTON 10

Material	Aluminium
Diameter tube	48 - 51mm
Threaded bolt	M10
Max. weight load	100kg
Weight	0,20kg

200kg



BC50(B)-200D
SWIVEL COUPLER

151.417 ALU	151.418 BLACK

CARTON	**5**
Material	Aluminium
Diameter tube	48 - 51mm
Threaded bolt	M10
Max. weight load	200kg
Weight	0,66kg

500kg



BC50-500D
SWIVEL COUPLER

151.419 CARTON 10

Material	Aluminium
Diameter tube	48 - 51mm
Threaded bolt	M10
Max. weight load	500kg
Weight	1,00kg

20kg



SAF20
SAFETY CABLE

853.310

CARTON	**40**
Max. weight load	20kg
Dimensions	70cm x 2mm

30kg



SAF35
SAFETY CABLE

853.316

CARTON	**100**
Max. weight load	30kg
Dimensions	35cm x 3mm

30kg



SAF75
SAFETY CABLE

853.319

CARTON	**100**
Max. weight load	30kg
Dimensions	75cm x 3mm

65kg





SAF65(B)
SAFETY CABLE

853.307 ALU **853.308** BLACK

CARTON	**40**
Max. weight load	65kg
Dimensions	95cm x 5mm

220kg







TRT220
TOWER LIFT

- Telescopic lifting tower
- Structural steel base
- 4 Removable legs
- Vertical or horizontal transport
- 4 Swivel castors
- Multiple safety features
- Black finish

6.5M

180.640 CARTON **1** PALLET **2**

Material	Steel
Dimensions: Folded	460 x 460 x 1880mm
Dimensions: Min height	1.8m
Dimensions: Max height	6.5m
Max. weight load	220kg
Weight	99,00kg







WLS70
LIGHT STAND WITH T-BAR

- Professional Metal Lighting stand with T-Bar
- Folding Tripod Legs
- Length T-Bar: 100cm with 6 positions
- Supplied with T bar bolts
- Recommended Load Capacity: max. 40kg
- Tube diameter: 35 mm
- Folded Position: 135cm
- TÜV/GS certified
- Rubber feet

1.0M 2.9M

180.629 CARTON **2** PALLET **19**

Material	Metal
Threaded Bolt	M10
Dimensions: Folded	165 x 19 x 25cm
Dimensions: T-Bar	100cm
Dimensions: Min height	140cm
Dimensions: Max height	290cm
Max. weight load	40kg
Weight	8,00kg







WLS80
LIGHT STAND WITH WINCH

- Professional Winch up Stand
- Folding Tripod Legs
- Tube diameter: 35 mm
- All Steel parts including clamp
- Adjustable footplate to stand on
- Recommended Load Capacity: max. 80kg
- Automatic braking system
- Safety-pins for mechanic locking
- Folded Position: 165cm
- TÜV/GS certified
- Material: Steel
- Non-slip rubber feet

4.1M

180.630 CARTON **1** PALLET **14**

Material	Metal
Tube diameter	35mm
Dimensions: Folded	165 x 19 x 25cm
Dimensions: Min height	190cm
Dimensions: Max height	410cm
Max. weight load	80kg
Weight	25,00kg

150.100 18
150.101 18
150.103 19
150.104 19
150.105 17
150.106 17
150.107 17
150.140 28
150.141 29
150.142 29
150.143 29
150.144 29
150.145 29
150.150 30
150.151 31
150.154 30
150.155 30
150.156 31
150.157 31
150.158 31
150.159 31
150.160 31
150.164 33
150.167 33
150.168 33
150.214 45
150.216 45
150.217 45
150.218 45
150.370 14
150.371 14
150.373 15
150.374 15
150.375 15
150.398 2
150.406 5
150.408 2
150.454 38
150.455 38
150.456 39
150.579 22
150.587 27
150.601 24
150.602 24
150.603 24
150.604 23
150.608 25
150.609 25
150.612 58
150.613 58
150.616 26
150.640 21
150.641 21
150.643 21
150.657 42
150.658 42
150.659 42
150.675 41
150.676 41
150.692 32
150.695 32
150.696 32
150.697 32
150.721 44
150.725 44
150.726 44
150.727 44
150.728 44
150.730 36
150.731 36
150.732 37
150.733 37
150.734 35
150.736 35
150.739 35
150.747 37
150.748 36
150.749 35
150.750 34
150.752 34
150.753 37
150.754 36
150.758 48
150.760 49
150.763 49
150.775 53
150.780 46
150.781 46
150.782 47
150.784 47
150.785 47
150.790 50
150.792 50
150.794 51
150.796 51
150.800 56
150.802 56
150.803 56
150.804 56
150.812 56
150.813 56
150.820 57
150.822 57
150.824 57
150.832 57
150.833 57
151.329 54
151.331 55
151.332 55
151.360 60
151.361 60
151.370 60
151.372 60
151.374 60
151.376 63
151.378 62
151.380 63
151.381 62
151.382 67
151.383 67
151.387 61
151.389 61
151.391 61
151.393 61
151.394 61
151.396 61
151.408 106
151.409 106
151.410 106
151.411 108
151.412 106
151.413 106
151.414 106
151.415 106
151.416 106
151.417 108
151.418 108
151.419 108
151.421 107
151.422 107
151.423 108
151.424 108
151.426 106
151.427 106
151.434 105
151.435 105
151.437 105
151.441 107
151.442 107
151.443 105
151.449 105
151.450 105
151.466 107
151.468 107
151.470 107
151.472 107
151.474 107
151.476 107
151.478 108
151.510 52
151.525 40
151.526 40
151.527 40
151.528 40
151.529 40
151.530 40
152.020 3
152.022 3
152.024 3
152.026 4
152.027 4
152.028 4
152.040 5
152.041 5
152.043 5
152.050 9
152.052 9
152.054 9
152.058 7
152.060 7
152.062 7
152.065 6
152.068 6
152.069 6
152.080 8
152.083 8
152.084 8
152.085 13
152.087 13
152.088 13
152.090 10
152.092 10
152.094 10
152.105 11
152.106 11
152.110 12
152.112 12
152.114 12
152.120 16
152.121 16
152.122 16
152.123 16
152.126 20
152.127 20
152.129 20
152.493 72
152.510 72
152.952 73
152.953 73
152.954 73
152.957 73
152.958 73
153.282 43
153.284 43
153.295 68
153.296 69
153.298 68
153.299 69
153.300 70
153.301 70

153.304 71
153.305 71
154.106 75
154.108 75
154.120 74
154.121 74
154.122 74
154.123 74
154.124 74
154.126 75
154.129 75
155.095 66
155.096 66
155.097 66
155.102 64
155.105 65
155.108 64
156.100 59
156.101 59
160.745 76
160.748 76
160.750 77
160.753 77
160.756 79
160.759 80
160.762 80
160.770 78
160.775 78
160.777 79
180.060 101
180.061 101
180.062 101
180.063 101
180.064 101
180.065 101
180.629 110
180.630 109
180.640 102
182.300 102
182.301 102
182.302 102
182.303 81
182.307 81
182.308 81
182.310 81
182.311 81
182.312 81
182.314 81
182.316 81
182.318 81
182.320 81
182.322 81
182.324 82
182.326 82
182.328 82
182.330 82
182.332 82
182.334 82
182.336 83
182.338 83
182.340 83
182.342 83
182.344 83
182.346 83
182.348 104
182.350 104
182.352 104
182.354 104
182.356 88
182.365 88
182.366 103
182.367 84
182.368 88
182.369 103
182.370 103
182.371 103
182.372 103
182.373 103
182.374 88
182.381 103
182.382 103
182.383 103
182.384 100
182.386 100
182.387 100
182.388 100
182.393 100
182.397 100
182.398 100
182.399 100
182.400 89
182.401 90
182.403 89
182.405 89
182.406 89
182.407 89
182.409 89
182.411 89
182.413 89
182.415 89
182.417 89
182.419 90
182.423 90
182.424 90
182.426 90
182.427 90
182.428 90
182.429 91
182.430 91
182.431 91
182.432 91
182.433 91
182.434 91
182.436 92
182.437 92
182.438 92
182.439 92
182.440 92
182.441 92
182.443 93
182.444 93
182.445 93
182.450 93
182.452 93
182.453 85
182.460 85
182.461 85
182.462 85
182.463 85
182.464 85
182.465 85
182.466 85
182.467 85
182.468 85
182.469 86
182.470 86
182.471 86
182.472 86
182.473 86
182.474 86
182.475 87
182.476 87
182.477 87
182.478 87
182.479 87
182.480 87
182.481 102
182.482 102
182.485 102
182.487 102
182.489 102
182.493 94
182.500 94
182.501 94
182.502 94
182.503 94
182.504 94
182.505 94
182.506 94
182.507 94
182.508 94
182.509 94
182.510 94
182.511 95
182.516 95
182.518 95
182.522 95
182.524 95
182.526 95
182.529 95
182.530 95
182.532 95
182.533 96
182.540 96
182.542 96
182.543 96
182.544 96
182.545 96
182.546 96
182.547 96
182.548 97
182.550 97
182.551 97
182.552 97
182.553 97
182.554 98
182.555 98
182.556 98
182.557 98
182.558 98
182.559 97
182.560 99
182.561 99
182.565 99
182.567 99
182.568 101
182.575 101
182.577 103
182.580 100
182.583 100
182.586 100
182.589 100
182.592 100
182.595 109
853.307 109
853.308 109
853.310 109
853.316 109
853.319 . . . . . .



TRONIOS GLOBAL HQ
Bedrijvenpark Twente Noord 18
7602 KR Almelo, Netherlands
+31 (0)85 105 3155
info@tronios.com

TRONIOS UNITED KINGDOM
Central 8, Caspian Close
Standford-le-hoper SS17 9FN
United Kingdom
sales@tronios.co.uk

TRONIOS IBERICA
C/ Valles 22, Santa Perpetua de Mogoda
08130 Barcelona, Spain
comercial@tronios.es

TRONIOS ASIA
10 Ubi Crescent #07-95
Ubi Techpark Lobby E
408564 Singapore
salesAsia@tronios.com

WWW.BEAMZLIGHTING.COM